

# HIGHWAY AND TRANSIT NETWORKS

Used in the Air Quality Conformity Analysis of the  
Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver.  
2.4.6 Travel Model)

February 9, 2026



National Capital Region  
**Transportation Planning Board**

## **Highway and Transit Networks used in the Air Quality Conformity Analysis of the Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)**

February 9, 2026

### **About the TPB**

The National Capital Region Transportation Planning Board (TPB) is the federally designated Metropolitan Planning Organization (MPO) for metropolitan Washington. It is responsible for developing and carrying out a continuing, cooperative, and comprehensive transportation planning process in the metropolitan area. Members of the TPB include representatives of the transportation agencies of the states of Maryland and Virginia and the District of Columbia, 24 local governments, the Washington Metropolitan Area Transit Authority, the Maryland and Virginia General Assemblies, and nonvoting members from the Metropolitan Washington Airports Authority and federal agencies. The TPB is staffed by the Department of Transportation Planning at the Metropolitan Washington Council of Governments (COG).

### **About COG**

The Metropolitan Washington Council of Governments (COG) is an independent, nonprofit association that brings area leaders together to address major regional issues in the District of Columbia, suburban Maryland, and Northern Virginia. COG's membership is comprised of 300 elected officials from 24 local governments, the Maryland and Virginia state legislatures, and U.S. Congress.

### **About Visualize 2050**

Visualize 2050 is the federally required long-range transportation plan for the National Capital Region. It identifies and analyzes all regionally significant transportation investments planned through 2050 to help decisionmakers and the public "visualize" the region's future. Visualize 2050 was developed by the TPB in 2023.

### **Credits**

Director of COG's Department of Transportation Planning (DTP): Kanti Srikanth

Director, Travel Forecasting and Emissions Analysis, DTP: Mark Moran

Editor: Wanda Owens

Contributing Editors: Meseret Seifu, Feng Xie, Jim Yin, William Bacon, Ray Ngo, Anant Choudhary, Nazneen Ferdous, and Mark Moran

Oversight: COG/TPB Travel Forecasting Subcommittee

### **Acknowledgements**

This publication was funded, in part, by grants from the District of Columbia Department of Transportation, the Maryland Department of Transportation, the Virginia Department of Transportation, the Federal Highway Administration and the Federal Transit Administration. The material herein does not necessarily reflect the views of the sponsoring agencies.

### **Accommodations Policy**

Alternative formats of this document are available upon request. Visit [www.mwcog.org/accommodations](http://www.mwcog.org/accommodations) or call (202) 962-3300 or (202) 962-3213 (TDD).

## **Title VI Nondiscrimination Policy**

The Metropolitan Washington Council of Governments (COG) fully complies with Title VI of the Civil Rights Act of 1964 and related statutes and regulations prohibiting discrimination in all programs and activities. For more information, to file a Title VI related complaint, or to obtain information in another language, visit [www.mwcog.org/nondiscrimination](http://www.mwcog.org/nondiscrimination) or call (202) 962-3300.

El Consejo de Gobiernos del Área Metropolitana de Washington (COG) cumple con el Título VI de la Ley sobre los Derechos Civiles de 1964 y otras leyes y reglamentos en todos sus programas y actividades. Para obtener más información, someter un pleito relacionado al Título VI, u obtener información en otro idioma, visite [www.mwcog.org/nondiscrimination](http://www.mwcog.org/nondiscrimination) o llame al (202) 962-3300.

Copyright © 2022 by the Metropolitan Washington Council of Governments



## Table of Contents

<b>1</b>	<b>Introduction.....</b>	<b>5</b>
1.1	Air Quality Conformity Process .....	7
1.2	Network Development Program Overview.....	8
1.3	Report Structure .....	9
<b>2</b>	<b>TPB Transportation Network Background .....</b>	<b>10</b>
2.1	Modeled Area .....	10
2.2	Time-of-Day Considerations .....	10
2.3	Zone Area System .....	13
2.4	Highway Network Elements.....	19
2.5	Transit Network Elements .....	20
2.6	Overview of Network Travel Costs .....	21
2.7	Node Numbering System.....	22
<b>3</b>	<b>Cube Voyager Network Inputs.....</b>	<b>25</b>
3.1	Cost Deflation Inputs.....	25
3.2	Highway Network Files.....	28
3.2.1	Zonal land use.....	30
3.2.2	Highway Link and Node Coordinate Files .....	31
3.2.3	Roadway Functional Classification and the Facility-Type Variable .....	33
3.2.4	Other link attributes .....	35
3.2.5	Toll Parameter File.....	38
3.2.6	Highway Network Screenlines .....	49
3.2.7	Highway Statistics from Visualize 2050 .....	52
3.3	Transit Network Files.....	55
3.3.1	Transit and Non-Transit Mode Codes .....	56
3.3.2	Rail Station File .....	60
3.3.3	Walk- and Drive-Access to Transit .....	62
3.3.4	Station Coordinate Files.....	68
3.3.5	Transit Parking Lot Coordinate Files .....	68
3.3.6	Rail Links .....	69
3.3.7	Transfer Links.....	70
3.3.8	Transit Line/Route Files .....	71
3.3.9	Example of network coding .....	73
3.3.10	Transit route summaries.....	75
3.4	Transit path building .....	81

<b>3.5</b>	<b>Transit Fare Files .....</b>	<b>82</b>
3.5.1	Gathering fare data from the transit providers .....	82
3.5.2	Calculating zone-to-zone fares used by the model.....	83
<b>4</b>	<b>COG/TPB Multi-Year, Multi-Modal Unified Geodatabase .....</b>	<b>93</b>
<b>4.1</b>	<b>Unified Geodatabase Overview .....</b>	<b>93</b>
<b>4.2</b>	<b>Difference between TRNBUILD and PT networks.....</b>	<b>95</b>
<b>4.3</b>	<b>Update and Changes to the Database and/or COGTools .....</b>	<b>97</b>
<b>4.4</b>	<b>Unified Geodatabase COGTools .....</b>	<b>100</b>
<b>4.5</b>	<b>Unified Geodatabase Tables: Overview and Highway Network Tables .....</b>	<b>103</b>
<b>4.6</b>	<b>Unified Geodatabase Tables: Transit Network Tables .....</b>	<b>110</b>
<b>4.7</b>	<b>General Transit Feed Specification (GTFS) Data .....</b>	<b>113</b>

## List of Tables

Table 1-1	Schedule Visualize 2050 plan and FY 2026-2029 TIP .....	8
Table 2-1	Jurisdictional summary of 3,722 TPB TAZ ranges .....	15
Table 2-2	Differences between COG TAZ and TPB TAZ area systems.....	16
Table 2-3	TAZ/node numbering system overview .....	23
Table 2-4	Node numbering system for transit nodes .....	23
Table 2-5	Allocated highway node ranges by jurisdiction .....	24
Table 3-1	Listing of highway network input files .....	28
Table 3-2	Format description of the land use file (zone.dbf) .....	30
Table 3-3	Round 10 Cooperative Forecasts regional totals by year .....	31
Table 3-4	Base highway link file description (link.dbf) .....	31
Table 3-5	Highway node file description .....	32
Table 3-6	Limit codes .....	32
Table 3-7	Area-type codes, from 1 to 7, based on population and employment density .....	36
Table 3-8	The six area-type codes and examples of each area type .....	37
Table 3-9	Toll parameter file (Toll_esc.dbf).....	42
Table 3-10	AM lane-miles for the Visualize 2050 highway networks by Jurisdiction .....	53
Table 3-11	AM lane-miles for the Visualize 2050 highway networks by Facility Type .....	54
Table 3-12	Listing of transit network input files .....	55
Table 3-13	Transit mode codes .....	57
Table 3-14	Transit agencies in the Washington, D.C. area (TPB modeled area) .....	58
Table 3-15	Equivalency between transit modes and transit service .....	59
Table 3-16	Non-transit mode codes used in TRNBUILD .....	60
Table 3-17	Variables in the transit station file (Station.dbf) (updated10-22-21) .....	61
Table 3-18	Transit access distance codes (NCT) .....	61

Table 3-19 Station centroid and station node range by mode .....	62
Table 3-20 Header section for each transit route in a transit line file .....	73
Table 3-21 AM peak-period Metrorail line summary by year: 2025, 2026, 2030, 2040, 2045 and 2050.....	75
Table 3-22 Off-peak period Metrorail line summary by year: 2025, 2026, 2030, 2040, 2045 and 2050.....	76
Table 3-23 AM peak-period commuter rail summary by year: 2025, 2026, 2030 and 2040 .....	77
Table 3-24 Off-peak-period commuter rail summary by year: 2025, 2026, 2030 and 2040 .....	77
Table 3-25 AM peak-period light rail, BRT, streetcar summary by year: 2025, 2026, 2030, 2040, 2045 and 2050 ...	79
Table 3-26 Off-peak-period light rail, BRT, streetcar summary by year: 2025, 2026, 2030, 2040, 2045 and 2050....	80
Table 3-27 Rail centerline and road lane miles.....	81
Table 3-28 Metrorail fare structure, WMATA Tariff #45 .....	84
Table 3-29 File format: File relating bus fare zones to TAZs and Metrorail stations (TAZFRZN.ASC) .....	89
Table 3-30 AM Peak and Off-Peak Bus Fare Matrix between MWCOG Fare Zones (Expressed in 2021 cents) .....	90
Table 3-31 Listing of Transit Fare Input Files .....	92
Table 4-1 Comparison of Non-Transit Links Between TRNBUILD and PT Networks .....	96
Table 4-2 Updates made to the geodatabase and COGTools.....	98
Table 4-3 Network Links Feature Class table with "Link Type" codes (1-16) description.....	106
Table 4-4 Network Nodes Feature Class table with "Node Type" codes (1-13) description .....	107
Table 4-5 Base Links Table with "Mode" codes (1-16) description .....	108
Table 4-6 Transit Links Table .....	111
Table 4-7 Transit Route Stops Table .....	111
Table 4-8 Transit Lines Definition Table .....	112
Table 4-9 GTFS files.....	114
Table 4-10 Availability of GTFS data for transit providers in the Washington, D.C. area (TPB modeled area) .....	115

## List of Figures

Figure 2-1 COG/TPB modeled area – 3,722-zone area system (TPB planning area shown in gray) .....	11
Figure 2-2 Location of external stations in the modeled area.....	17
Figure 2-3 Location of external stations in Baltimore Beltway area.....	18
Figure 3-1 Cost deflation parameter file (CPI_File.txt) .....	26
Figure 3-2 Projected CPI escalation at varying annual growth rates .....	27
Figure 3-3 Deflation process in the Gen2/Version 2.4 Travel Model .....	28
Figure 3-4 Highway network building process.....	29
Figure 3-5 Classification of roads and their emphasis on mobility and access.....	34
Figure 3-6 Example of different types of roads .....	35
Figure 3-7 Map of the six area types .....	38
Figure 3-8 Existing and the Visualize 2050 Managed-lane facilities in the regional highway networks.....	41
Figure 3-9 Dulles Toll Road: Toll facilities locations .....	43
Figure 3-10 Dulles Greenway: Toll facilities locations (Map 1 of 2).....	45
Figure 3-11 Dulles Greenway: Toll facilities locations (Map 2 of 2) .....	47
Figure 3-12 Highway Network screenlines: Inside the Beltway .....	50
Figure 3-13 Highway network screenlines: Outside the Beltway .....	51

Figure 3-14 Process for developing walk-access and drive-access links.....	63
Figure 3-15 An excerpt from the AreaWalk.txt file.....	65
Figure 3-16 Walk access/egress links in TAZ 56, east of Foggy Bottom Metrorail Station .....	66
Figure 3-17 Drive-access links associated with the Ballston Metrorail Station PNR lot .....	67
Figure 3-18 Excerpt from the Metrorail station coordinate file (met_node.tb).....	68
Figure 3-19 An excerpt of the Metrorail PNR lot coordinate file (met_pnrn.tb).....	69
Figure 3-20 An excerpt of the Metrorail rail link file (met_link.tb) .....	70
Figure 3-21 An excerpt from the file (met_bus.tb) containing transfer links (mode 12) between Metrorail stations and bus stops .....	71
Figure 3-22 Example of a transit line/route file in TRNBUILD (TB) format .....	72
Figure 3-23 Existing MWCOG/TRNBUILD convention for network coding around rail stations, park-and-ride lots, and bus service.....	74
Figure 3-24 Process for conducting transit path building.....	82
Figure 3-25 Metrorail fares (peak and off-peak) and the rail-to-bus discounts (Tariff.txt).....	85
Figure 3-26 Regional Primary Bus Fare Zone Map.....	86
Figure 3-27 Regional Secondary Bus Fare Zone Map .....	87
Figure 3-28 Combine bus fare zones (primary overlaid with secondary).....	88
Figure 3-29 Process for developing zone-to-zone transit fares.....	91
Figure 4-1 Relationship Between the network unified geodatabase and the Cube Voyager/PT Modeling Process ...	95
Figure 4-2 TPB Unified Geodatabase Structure .....	104

## **1 Introduction**

The National Capital Region Transportation Planning Board (TPB) is the federally designated Metropolitan Planning Organization (MPO) for the Washington, D.C. metropolitan area and is also one of several policy boards that operate at the Metropolitan Washington Council of Governments (COG). The COG/TPB staff develops and maintains, with consultant assistance, a series of regional travel demand forecasting models to support the regional transportation planning process in the metropolitan Washington region. One of the critical inputs to the regional travel demand forecasting model is a series of transportation networks, which represent both the highway (road) system and the transit system in the Washington, D.C. area. Transportation networks depict the highway and transit system for a series of discrete years, typically an existing “base” year and several forecast years. Transportation networks are used in the travel model to formulate impedances (travel times and costs) between origins and destinations. The travel model considers impedances as a basis for estimating the number of person trips that travel between zones and for allocating those person trips among specific modes of travel. Transportation networks also provide a basis upon which the performance of the existing and planned regional transportation system may be evaluated. The TPB Gen2/Version 2.4.6 Travel Model is a member of a family of trip-based, “four-step” travel demand models, known as “Version 2.4,” which, in turn, is a member of a series of trip-based models known as Generation 2 (Gen2). Transportation networks are prepared with attention to several technical requirements:

- Networks are designed to represent the major transportation facilities and services that are relevant to the regional level of analysis. Thus, many of the smaller scale facilities, such as local roads, are purposefully excluded;
- Networks are designed to conform to a detailed area (or zone) system that is specifically designed for regional travel demand modeling. The existing area system for the Washington, D.C. area consists of 3,722 transportation analysis zones (TAZs);
- Networks are designed to meet the specific technical requirements of the Gen2/Version 2.3 family of travel demand models. The travel model currently requires network inputs that are used to develop highway and transit travel impedances between zones. The travel model requires modal travel impedances associated with four time periods; and
- Networks are prepared in a format that is compliant with the specific requirements of the software platform that is currently used to apply the model. The Gen2/Version 2.4.6 Travel Model is currently implemented with Bentley Systems Cube software (Bentley Systems acquired Citilabs in 2020).

Because of the technically specialized nature of the model’s transportation networks, substantial staff resources are required to develop and manage these travel model inputs each year. The network development activity is included in the TPB’s Unified Planning Work Program (UPWP) under the Travel Forecasting major work activity. Network development includes frequent update of the current-year highway and transit networks with the most up-to-date information, as well as the development of future-year networks that represent the TPB’s continuously evolving Long-Range Transportation Plan

(LRTP), currently known as “Visualize 2050,” and the Transportation Improvement Program (TIP), which is a four-year subset of the LRTP.

The network development activity also supports other elements of the work program, including Mobile Emissions Planning and Technical Assistance, which encompass subarea and corridor studies conducted by both TPB staff and state/local planning agencies.

This technical report documents transportation networks produced for the Air Quality Conformity (AQC) analysis of Visualize 2050 and the FY 2026-2029 TIP, approved by the TPB in December 2025.

Visualize 2050 includes both a financially constrained element and an aspirational element. The constrained element includes projects that the region’s transportation agencies expect to be able to afford between now and 2050, and the aspirational element goes beyond financial constraints. The air quality conformity analysis is conducted for only the financially constrained element, and most references to the Visualize 2050 plan in this document refer to only that component.<sup>1</sup> Consistently, the forecast-year network inputs to the travel models are developed based on the financially constrained element only.

As stated earlier, transportation network files are developed in compliance with the travel demand model and its associated software. The currently adopted, production-use TPB travel demand model is known as the Generation 2/Version 2.4.6 model. This travel model uses an area system with 3,722 TAZs and is currently applied using Bentley Systems Cube software (Version 6.45.1 CE). Transit path-building is accomplished using a module of Cube Voyager called TRNBUILD. Cube Voyager also contains a newer transit path-building module called Public Transport (PT). The Generation 3 (Gen3) Travel Model transit path builder (PT), which is designed as a multi-path path builder provides a more realistic representation of an urbanized environment with multiple transit options. COG/TPB staff have developed a unified network database (containing both TRNBUILD and PT components) to support both the Gen2 and Gen3 travel demand models.

This report describes the process, technical conventions and specifications associated with the TPB’s network-related inputs to the Gen2.4.6 travel model. There are other supporting documents that are directly related to the Visualize 2050 Plan and the FY 2026-2029 TIP network development process and specifications, including: 1) the air quality conformity analysis report,<sup>2</sup> which includes a complete listing of all transit and highway projects assumed in the Visualize 2050 plan and the FY 2026-2029 TIP; 2) the

---

<sup>1</sup> See, for example, the previous analysis: “Air Quality Conformity Analysis of the 2022 Update to Visualize 2045, Full Report” (Washington, D.C.: National Capital Region Transportation Planning Board, Metropolitan Washington Council of Governments, June 15, 2022), <https://www.mwcog.org/documents/2022/06/15/air-quality-conformity-analysis-of-the-2022-update-to-visualize-2045-full-report/>.

<sup>2</sup> Robert d’Abadie, “Air Quality Conformity Analysis of Visualize 2050 and the FY2026-2029 Transportation Improvement Program,” Full Report (Washington, D.C.: National Capital Region Transportation Planning Board, Metropolitan Washington Council of Governments, expected December 2025).

Gen2/Version 2.4.6 User's Guide,<sup>3</sup> which documents the overall model application process. The user's guide and other important model documentation can be found on the "Model Documentation" web page.<sup>4</sup>

The remainder of this chapter provides an overview of the TPB's network development process and its connection with the Air Quality Conformity Determination process.

## **1.1 Air Quality Conformity Process**

One of the primary goals of TPB's network development program is to furnish base- and forecast-year highway and transit networks for the Air Quality Conformity Analysis (AQC) of the region's Long-Range Transportation Plan (LRTP) and the Transportation Improvement Program (TIP). The AQC Analysis is done to determine whether air pollution from motor vehicles (referred to as "on-road mobile emissions") that use roads represented in the TIP and the LRTP conform to state implementation plans (SIPs) designed to ensure that mobile emissions do not exceed approved mobile emissions budgets regarding prevailing air quality standards set by federal law. LRTPs must be updated every four years, but COG/TPB typically conducts the LRTP update and the air quality conformity analysis on a more frequent basis, such as every two years. The analysis entails the formulation of travel demand forecasts and associated mobile source emissions inventories for a set of milestone years. TPB staff typically collects TIP and LRTP transportation network information from all TPB member jurisdictions, the three state departments of transportation (District of Columbia Department of Transportation [DDOT], Maryland Department of Transportation [MDOT] and Virginia Department of Transportation [VDOT]), the Washington Metropolitan Area Transit Authority (WMATA or Metro), the Maryland Transit Administration (MTA), the Virginia Railway Express (VRE), and other local transit service providers on a biennial basis.<sup>5</sup>

The Visualize 2050 plan air quality conformity schedule is shown in Table 1-1.

---

<sup>3</sup> Meseret Seifu, Ray Ngo, Feng Xie, and Mark S. Moran, "User's Guide for the COG/TPB Gen2/Version 2.4.6 Travel Demand Forecasting Model" (Washington, D.C.: Metropolitan Washington Council of Governments, National Capital Region Transportation Planning Board, July 13, 2023), [https://www.mwcog.org/assets/1/6/mwcog\\_tpb\\_travel\\_model\\_Ver2.4.6\\_User\\_Guide.pdf](https://www.mwcog.org/assets/1/6/mwcog_tpb_travel_model_Ver2.4.6_User_Guide.pdf).

<sup>4</sup> "Model Documentation," Metropolitan Washington Council of Governments, 2021, <http://www.mwcog.org/transportation/activities/models/documentation.asp>.

<sup>5</sup> Although the modeled area, and thus the transportation networks, include one county in West Virginia (Jefferson Co.), the TPB model networks include only current-year roads in this county, not future-year roads.

**Table 1-1 Schedule Visualize 2050 plan and FY 2026-2029 TIP**

Year	Month	Event
2023	January	Technical Committee briefed on request for TIP and Plan updates
2024	March	Technical Committee briefed on draft project inputs and draft air quality conformity Scope of Work TPB briefed on draft project inputs and draft air quality conformity Scope of Work MWAQCTAC briefed on inputs and Scope of Work
	May	TPB reviewed and approved inputs and draft Scope of Work
2025	September	MWAQCTAC briefed on draft TIP, Plan and conformity analysis
	October	Draft FY2026-2029 TIP, Visualize 2050 Plan, and air quality conformity analysis released for 30-day public comment period Technical Committee reviewed draft TIP, Plan and conformity analysis
	November	TPB briefed on draft TIP, Plan and conformity analysis
	December	TPB approved the FY2026-2029 TIP, and Visualize 2050 Plan and the air quality conformity analysis

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\ Viz2050 schedule.doc"

The air quality conformity (AQC) analysis of the Visualize 2050 plan created networks for the following six analysis years: 2025, 2026, 2030, 2040, 2045 and 2050. A 2017 network was developed for data requests, though it was not an official analysis year.

## 1.2 Network Development Program Overview

Network development activities are carried out in a way that accommodates the air quality conformity (AQC) determination schedule. Federal law requires that the LRTP be updated every four years. However, in the Washington, D.C. area, the LRTP has typically been updated on a more frequent basis (such as annually, or every two years), which means that the air quality conformity process has also been conducted on a more frequent basis than the federally required four-year cycle. The Visualize 2050 LRTP, developed in 2023, represents both the financial viability of projects and conformity with federal air quality standards. It included complete financial analysis, performance analysis, and extensive public outreach.

One of the key objectives of the network development program is to prepare regional network inputs to the travel model in time to support the travel modeling work for the LRTP update and the AQC analysis. The following procedure has typically been followed in each LRTP update cycle:

- 1) Pre-existing network inputs developed for the previous air quality analysis, and the previous TIP and LRTP, are obtained as a starting point for highway network coding. For example, the inputs for the Visualize 2050 plan were built from the previously developed 2022 Update to Visualize 2045 plan analysis inputs. The TPB's link and node network data are currently stored in a multi-

year and multi-modal (highway and transit) Unified Geodatabase. TPB staff essentially develop a single multi-year database for each LRTP.<sup>6</sup>

- 2) The pre-existing highway networks are subject to ongoing review and updates, such as when errors are detected by either TPB staff or external users of the regional travel model. These types of updates are incorporated into the current-year TIP and LRTP network database throughout the year.
- 3) The transit network “base-year” data is refreshed during each regular LRTP update with the latest schedule information provided by the local operators and provides the starting point for transit coding. Most of the transit schedule information was obtained from digital, machine-readable files. However, for the few agencies that did not produce machine-readable schedule data, schedule information was extracted manually from the transit route schedules published on their websites.
- 4) The current year TIP and LRTP network elements (both highway and transit) are collected from the state and local implementing agencies and coded into the network. The coded projects are those considered to be “regionally significant,” as defined by the TPB.<sup>7</sup>

Other miscellaneous and policy-related network inputs that are not currently stored in the Unified geodatabase are prepared for each milestone year. Network development activities also address the production of networks required for special project-planning studies, as well as the development of specialized inputs supporting TPB’s Model Development activities. This report focuses on the data and conventions used to construct the Visualize 2050 and FY 2026-2029 TIP networks.

### **1.3 Report Structure**

The remainder of this report addresses the structure and conventions of the TPB travel model transportation networks in greater detail. Chapter 2 presents the foundational elements of the TPB’s transportation networks, such as the zonal area system underpinning the network and the components of the regional highway network. Chapter 3 describes the individual network files that are prepared for the transportation model and the attributes that are contained in each file. Chapter 4 describes the unified geodatabase that is currently used to maintain the regional network data. The database has been specially designed to consolidate network-related information within a multi-year and multi-modal framework, containing both Cube TRNBUILD and Cube Public Transport (PT) components, in a geographically referenced framework. Although the unified geodatabase contains both TRNBUILD and PT components, this report focuses on TRNBUILD network inputs of the Ver. 2.4.6 Travel Model that are developed based on the Visualize 2050 LRTP project assumptions.

---

<sup>6</sup> Networks exported from this database should be consistent with each other, whereas networks exported from different geodatabases will not necessarily be consistent with each other, so it is generally not a good idea to mix networks from two different geodatabases.

<sup>7</sup> Memorandum from Jane Posey to TPB Technical Committee, Subject: Defining Regional Significance for Conformity, October 6, 2011.

## 2 TPB Transportation Network Background

This chapter presents background on the transportation networks that are developed by TPB staff for regional travel demand models, including a description of the “modeled area,” a review of the zone system that underlies the networks, and the time-of-day period definitions that are represented in the networks. The basic elements associated with highway and transit networks are described, along with a review of network location (node) numbering. This chapter also presents an overview of the specific travel costs that are developed in the TPB networks and considered in the regional travel model.

### 2.1 Modeled Area

A map of the TPB modeled area is shown in Figure 2-1. The area covers 6,800 square miles and includes 22 jurisdictions spanning the District of Columbia, Northern Virginia, suburban Maryland, and one county in West Virginia.<sup>8</sup> The modeled area extends well beyond the current TPB planning area, which is shown as the shaded area in Figure 2-1.

### 2.2 Time-of-Day Considerations

The travel model requires zonal travel times and costs for both peak and off-peak conditions because congestion levels experienced by different travel markets vary substantially over an average weekday. Thus, the travel model networks developed by TPB staff correspond to either peak or off-peak conditions.


Many of the primary highway facilities in the region operate with varying configurations during peak and off-peak hours of the day. Examples of highway facilities with time-of-day variability on operation include:

- High-Occupancy Vehicle (HOV) priority lanes/facilities: Freeways with diamond lanes or exclusive lanes that are dedicated to HOVs. Many HOV priority lanes operate in the peak-flow direction during peak periods and revert to general-purpose lanes during the off-peak hours;
- Facilities with reverse-direction lanes: Several roads operate with varying directional lane configurations during the morning and evening time periods to better serve the peak-flow direction of traffic (e.g., The Theodore Roosevelt Bridge, which has a reversible lane). Some facilities operate entirely in one direction during rush periods and revert to two-way configurations during the off-peak; and
- Some facilities do not change in operation during the day, but are available only to special markets, such as autos only or airport-bound trips.

---

<sup>8</sup> The term “jurisdiction” includes both counties (e.g., Arlington County) and major cities (e.g., the City of Alexandria and Washington, D.C.). One of the 22 jurisdictions, Spotsylvania County, is only partially included in the modeled study area- the northern portion approximately north of VA 606. All other jurisdictions are fully included in the modeled area.

Figure 2-1 COG/TPB modeled area – 3,722-zone area system (TPB planning area shown in gray)

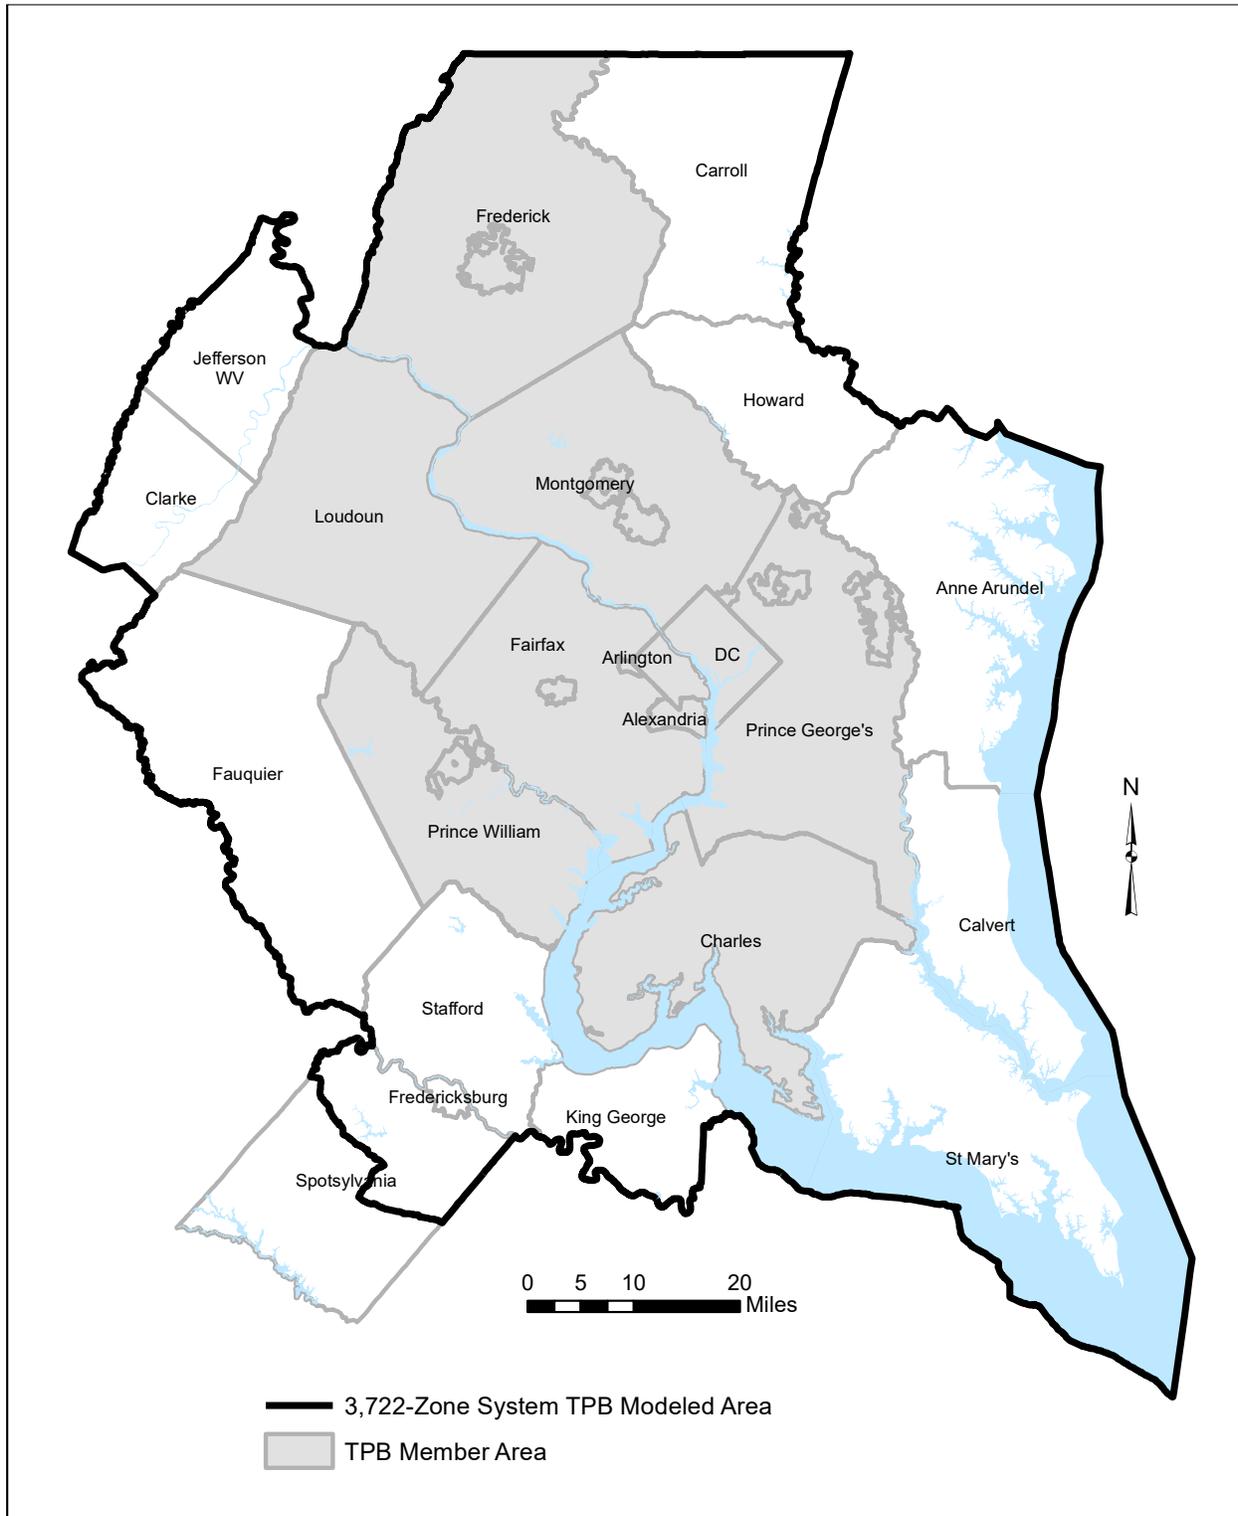

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Jur\_Map.emf"

The following time-period definitions are used for the highway network:

- AM peak period (3 hours: 6:00 AM to 9:00 AM)
- Midday period (6 hours: 9:00 AM to 3:00 PM)
- PM peak period (4 hours: 3:00 PM to 7:00 PM)
- Night/early morning period (11 hours: 7:00 PM to 6:00 AM)

The highway network distinguishes these special operations by using facility-specific attributes that change by time-of-day period. These attributes include directional lanes and codes that enable or disable the use of a specific facility to specific travel markets (e.g., HOV traffic). Highway costs (tolls) on specific facilities are also coded differentially by time-of-day period.

The operational differences reflected in the regional highway networks pertain essentially to high-level facilities (freeways and principal arterials). **While numerous operational differences between time periods exist on minor arterials and collectors, many of these are not reflected in TPB networks. For example, TPB highway networks do not contain information about turn prohibitions or parking restrictions,** which are below the grain of the regional network. The highway network coding in the current network database reflects the time-of-day lane changes based on on-street parking restrictions in the District of Columbia (DC). There could be other areas around the region where the on-street parking restrictions are not reflected (e.g., Old Town Alexandria), but those are very limited.

Like the highway network, the level of transit service in the Washington, D.C. region varies substantially during the average weekday. Consequently, transit networks prepared for the Gen2/Version 2.4.6 travel model provide transit network inputs for four TOD periods, which are defined as follows:

1. AM Peak (AM): 7:00 AM – 7:59 AM for most transit services; 6:00 AM – 6:59 AM for transit services operating in the outer areas such as Howard County, Frederick County, and Loudoun County
2. Mid-Day (OP): 10:00 AM – 2:59 PM. Note that, to continue to support Gen2 Model which requires network inputs for the “AM” and “OP” periods, this Mid-Day period is labelled as “OP” instead of “MD” in the network database
3. PM Peak (PM): 4:00 PM – 4:59 PM
4. Night-Time (NT): 7:00 PM – 11:59 PM

Regional travel models require two variables for each transit route. Run Time and Headway, both in minutes. COG staff extract this information from the GTFS scheduling data for about 90% of the regional transit services. The information for the remaining 10% of transit services is derived based on their online or paper schedules. For each modeled transit route, an average headway (service frequency) and

an average run time (time from start of the route to the end of the route) is calculated for each of the four time-of-day periods.<sup>9</sup>

### **2.3 Zone Area System**

Transportation Analysis Zones (TAZs) represent the basic geographic unit by which regional travel flows by auto and by transit are estimated in the travel demand model. The TAZ system is important to the overall network design because TAZs delineate the finest level of spatial resolution that can be supported by the land activity inputs, and hence the travel model. Consequently, the highway and transit facilities represented in the regional network are purposefully designed to conform around each TAZ as closely as possible.

The existing modeled area is subdivided into 3,722 TAZs. The zone system includes 3,675 internal TAZs and 47 external stations, which represent points of entry to, and exit from, the modeled area. The 3,722-TAZ system has been in existence since 2009 and has been designed to provide a greater level of resolution in concentrated areas of development known as “activity centers.” These concentrated areas were identified by COG’s Metropolitan Development Policy Committee in 2007 as a basis for encouraging mixed use development and as an aid for improving the coordination of land use and transportation planning.

The 3,722 TAZ system numbering has been developed on a jurisdictional basis as shown in Table 2-1. Each modeled jurisdiction incorporates cities within their boundaries. Fairfax County includes the City of Fairfax and the City of Falls Church (which are independent cities). Similarly, Prince William County includes the City of Manassas and City of Manassas Park. The TAZs within the cities’ boundaries are listed below Table 2-1.

The table indicates that the internal TAZs are numbered from 1 to 3675. The external station locations are shown in Figure 2-2 and Figure 2-3. External station numbers are sequenced from 3676 to 3722 and are assigned to highway facilities in a clockwise direction, from Virginia Route 3 station in King George County to US 50/301 (the Chesapeake Bay Bridge) in Anne Arundel County. The table also indicates that 1,278 reserved TAZs (3723 to 5000) are currently available for subzone work. However, changes to the existing TAZ system would require changes to dimensions that are currently specified in application scripts and programs.

The TAZs in Table 2-1 are referred to as “TPB TAZ” to distinguish them from “COG TAZ.” In 2008 and 2009, the COG GIS staff developed the current 3722-TAZ system, which had more zones as compared to the previous 2191-TAZ system, but did not increase the size of the modeled area. In other words, the new zones were, on average, smaller than the previous zone system, which is useful for better modeling of transit and non-motorized trips. Reviews of the initial 3,722-TAZ system uncovered some instances

---

<sup>9</sup> Jim Yin to Feng Xie, “Development of Transit Networks for four Time of Day (TOD) Periods in the MWCOG Unified Network Database” Memorandum, April 6, 2022

where TAZ boundary refinements were needed to be used in the COG Cooperative Forecasting process. The result was that there are now two sets of zones for the 3,722-TAZ area system:

- COG TAZs: For land activity forecasts (COGTAZ3722\_TPBMOD)
- TPB TAZs: For transportation modeling (TPBTAZ3722\_TPBMOD)<sup>10</sup>

The specific differences between the two area systems are detailed in Table 2-2.

---

<sup>10</sup> Meseret Seifu, “Review of New Zone System: 3722 Transportation Analysis Zones (TAZ)” (January 22, 2010 meeting of the COG/TPB Travel Forecasting Subcommittee, held at the Metropolitan Washington Council of Governments, Washington, D.C., January 22, 2010), 23, <http://www.mwcog.org/uploads/committee-documents/Z15aV1dd20100122152445.pdf>.

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 2-1 Jurisdictional summary of 3,722 TPB TAZ ranges

Jurisdiction/City	Juris. Code	County FIP Code	Beginning TAZ No.	Ending TAZ No.	TAZ/Station Count
District of Columbia	0	1	1	393	393
Montgomery Co., Md.	1	31	394	769	376
Prince George's Co., Md.	2	33	770	1404	635
Arlington Co., Va.	3	13	1405	1545	141
City of Alexandria, Va.	4	510	1546	1610	65
Fairfax Co., Va.	5	59	1611	2159	549
City of Fairfax		600			
City of Falls Church		610			
Loudoun Co., Va.	6	107	2160	2441	282
Prince William Co., Va.	7	153	2442	2819	378
City of Manassas		683			
City of Manassas Park		685			
Frederick Co., Md.	9	21	2820	2949	130
Howard Co., Md.	10	27	2950	3017	68
Anne Arundel Co., Md.	11	3	3018	3116	99
Charles Co., Md.	12	17	3117	3229	113
Carroll Co., Md.	14	13	3230	3287	58
Calvert Co., Md.	15	9	3288	3334	47
St. Mary's Co., Md.	16	37	3335	3409	75
King George Co., Va.	17	99	3410	3434	25
City of Fredericksburg, Va.	18	630	3435	3448	14
Stafford Co., Va.	19	179	3449	3541	93
Spotsylvania Co., Va.	20	177	3542	3603	62
Fauquier Co., Va.	21	61	3604	3653	50
Clarke Co., Va.	22	43	3654	3662	9
Jefferson Co., WV.	23	37	3663	3675	13
<b>Total Internal TAZs</b>					<b>3,675</b>
<b>External Stations:</b>			3676	3722	47
<b>Reserved TAZ numbers</b>			3723	5000	1,278
Note: 13 of the 3675 internal TAZs are unused: 61, 382, 770, 777, 2555, 2629, 3103, 3266, 3267, 3478, 3482, 3495, 3544					

Jurisdiction	City	TAZ No.
Fairfax Co., Va.	City of Fairfax	1630-1634, 1785,
		1791-1793, 1796-1801
	City of Falls Church	1920, 1927-1928,
		1933-1934, 1937-1940
Prince William Co., Va.	City of Manassas	2595, 2599, 2602, 2624,
		2627-2628, 2630-2632, 2637
	City of Manassas Park	263, 526, 442, 646

Ref: " I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables\3722TAZ\_Master\_Node\_Table\_Jan\_2015\_V2.4.xlsx"

Table 2-2 Differences between COG TAZ and TPB TAZ area systems

COG TAZ	Jurisdiction	Issue	TPB TAZ
61	District of Columbia	island/water body	unused TAZ
382	District of Columbia	water body	unused TAZ
770	Prince George's Co., MD	water body	unused TAZ
777	Prince George's Co., MD	water body	unused TAZ
2555	Prince William Co., VA	resolution too fine for regional model	dissolved into TAZ 2554
2629	Prince William Co., VA	resolution too fine for regional model	dissolved into TAZ 2630
3103	Anne Arundel Co., MD	resolution too fine for regional model	unused TAZ
3266	Carroll Co., MD	peninsula/water body	unused TAZ
3267	Carroll Co., MD	water body	unused TAZ
3482	Stafford Co., VA	resolution too fine for regional model	dissolved into TAZ 3489
3478	Stafford Co., VA	resolution too fine for regional model	dissolved into TAZ 3489
3495	Stafford Co., VA	resolution too fine for regional model	dissolved into TAZ 3494
3544	Spotsylvania Co., VA	water body	unused TAZ

Figure 2-2 Location of external stations in the modeled area


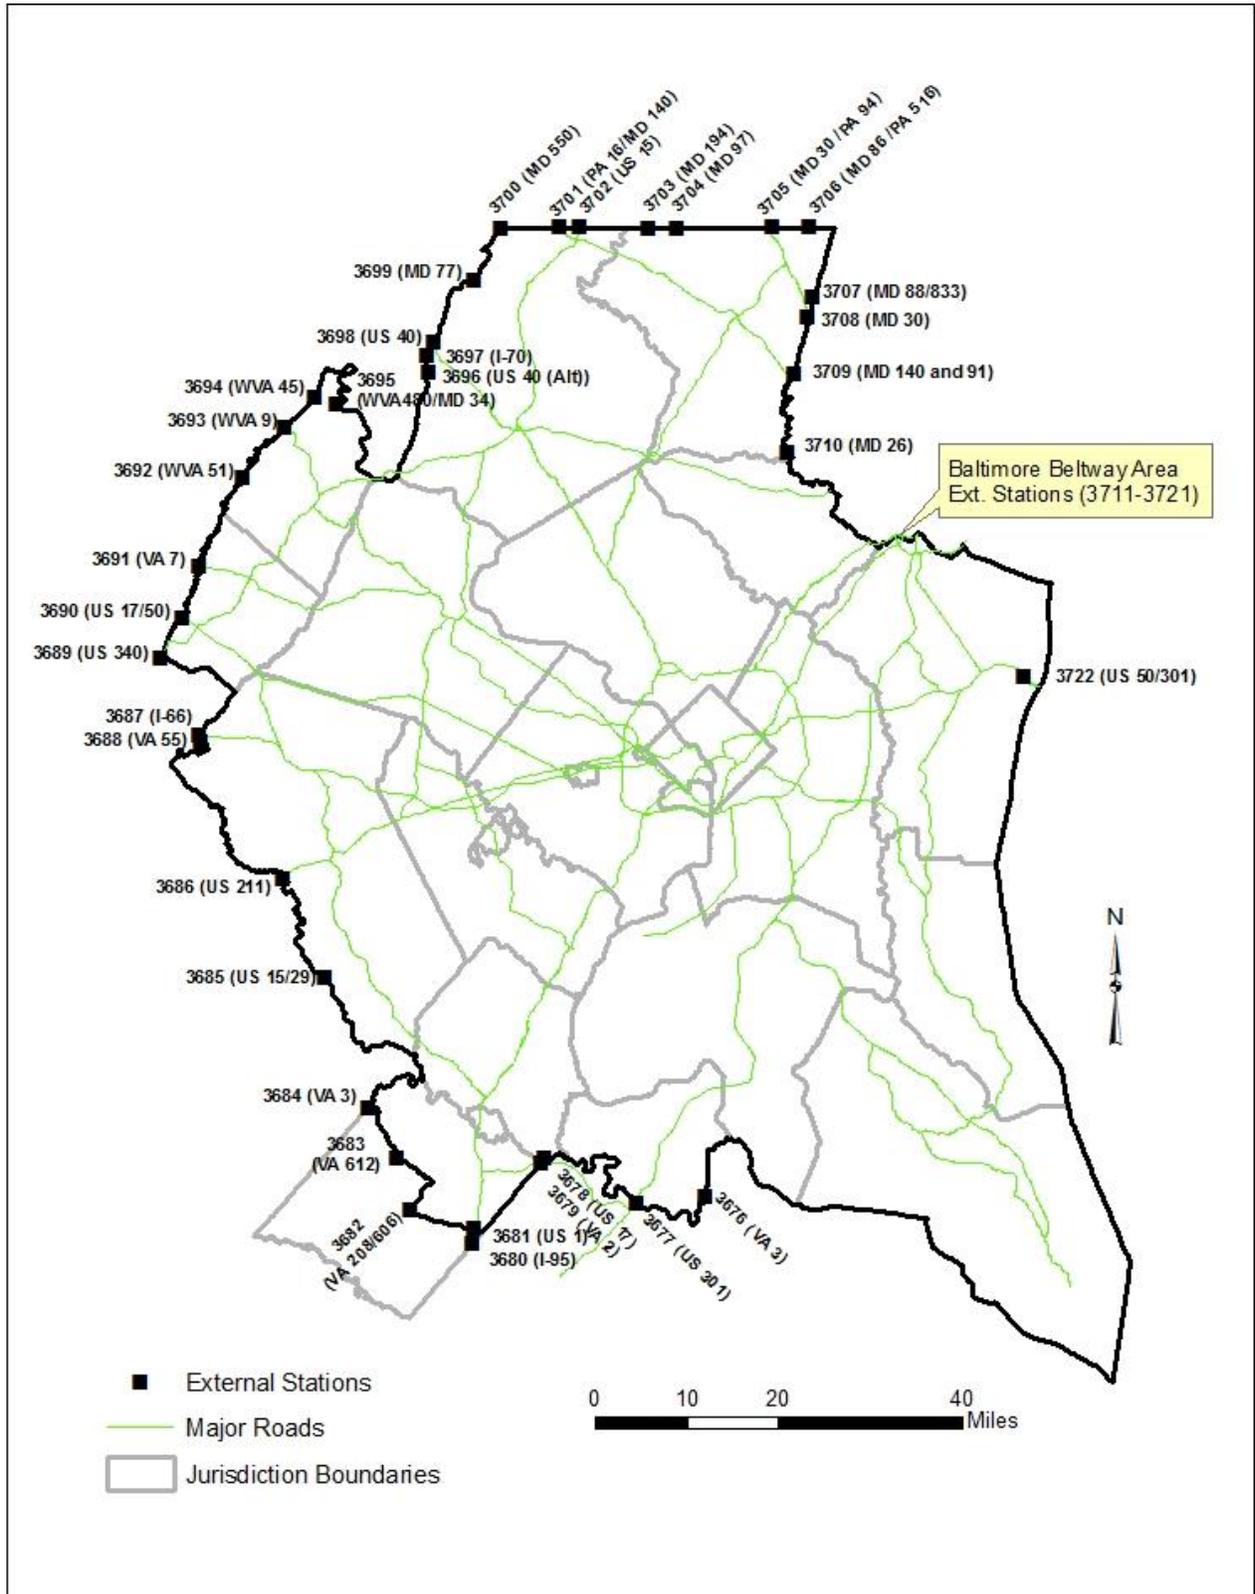


Figure 2-3 Location of external stations in Baltimore Beltway area

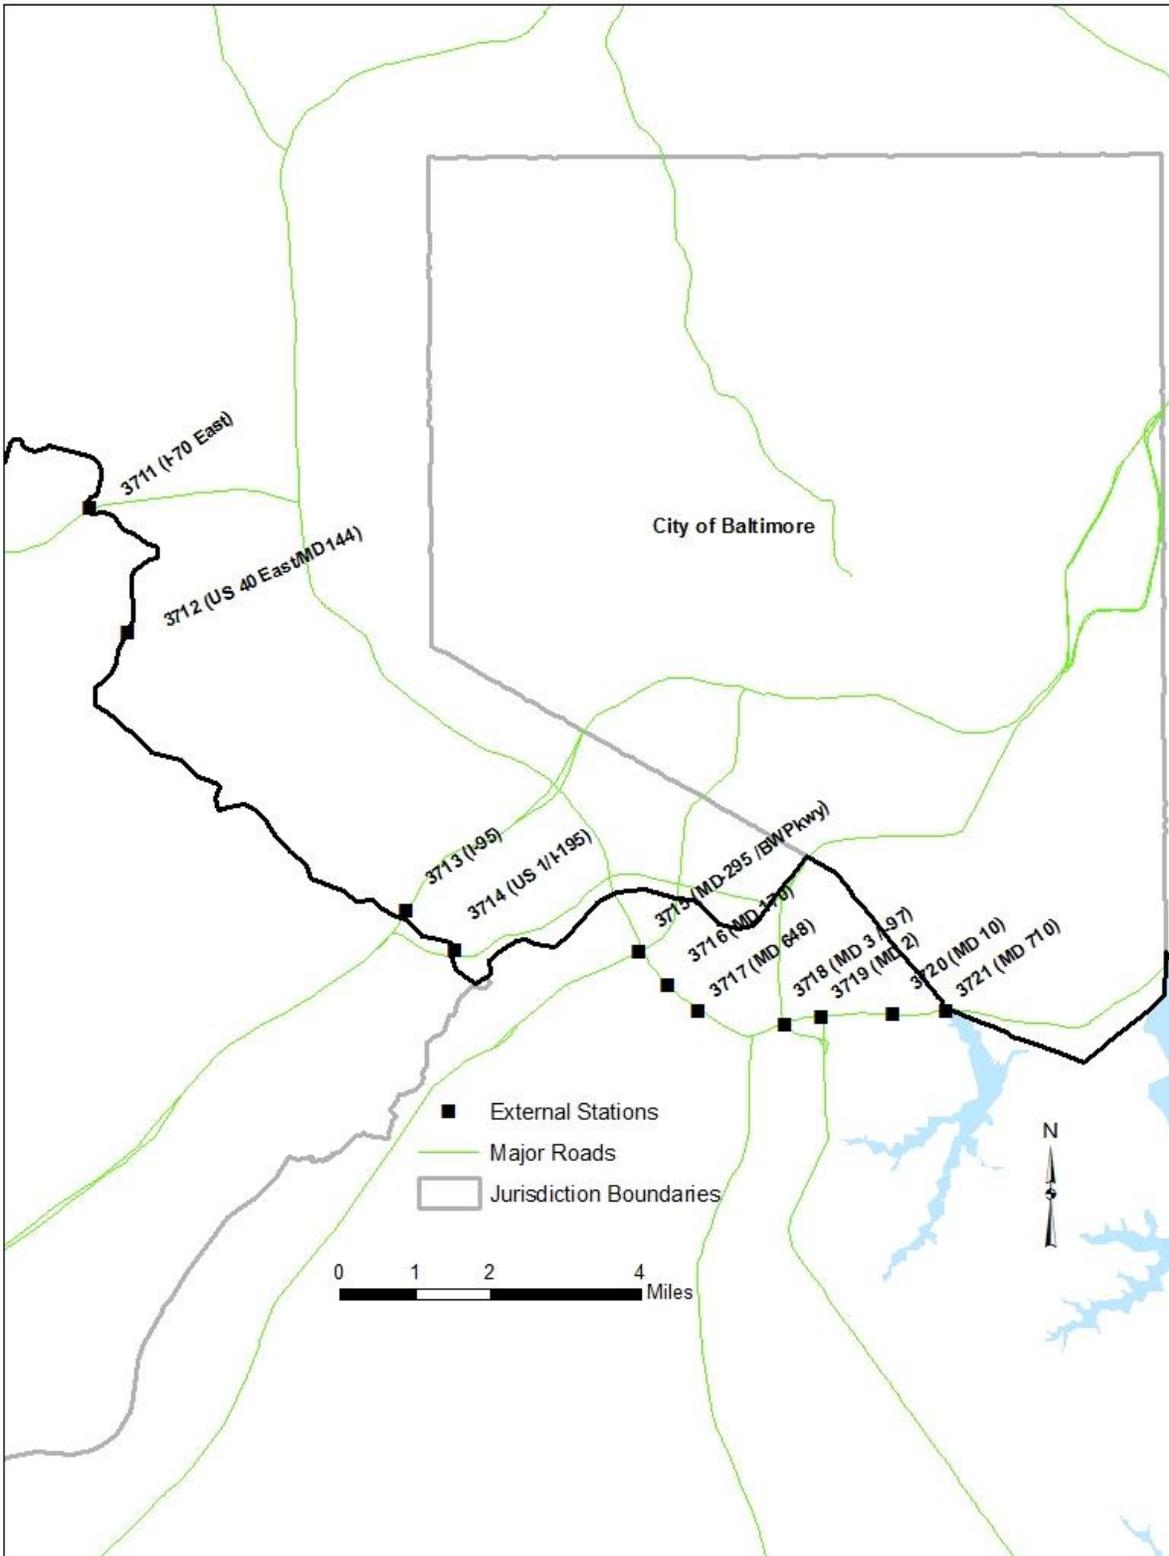

Ref: "I:\ateam\docum\fy14\2013LRTP\_Network\_Report\Ext\_Sta\_Balt\_Feb12.jpg"

## 2.4 Highway Network Elements

The transportation networks used by the travel model represent the region's transportation system as a collection of point locations (zone centroids and nodes) and transportation facility segments (links). This relatively simplistic depiction of the system provides the travel model with concise information about roadway and transit connectivity and capacity that exists between zones. The model evaluates travel demand against the network capacity and subsequently produces level-of-service metrics (times and costs) between zones, which are important variables in the model.

There are several types of nodes and links that are used in the highway networks. These types are listed and described below:

- **Zone Centroids:** Point locations which represent the geographic center of activity of a TAZ. All trips begin and end at zone centroids. Although zones also have boundaries, zone boundaries are not explicitly represented in the transportation network, so all trips are assumed to travel from one zone centroid to another zone centroid.
- **PNR "Dummy" Centroids:** Point locations which represent park-and-ride (PNR) parking lots at Metrorail, commuter rail, light rail stations, and streetcar/BRT stations. These are components of the highway network that exist so that congested travel times from TAZs to rail PNR lots may be developed in the construction of auto-access links in the transit network.
- **Highway Nodes:** Point locations that represent highway intersections, zonal points-of-access to the highway system, or simply "break points" or "shape points" for links representing highway facilities.
- **Centroid Connector Links:** Segments (or links) between zone centroids and the highway network by which traffic may leave or enter the TAZ. These special links represent the physical connection between zonal activity and the highway system based on the underlying localized street system. Centroid connections usually number from one to four links for each TAZ. Traffic "loaded" on centroid connectors is exclusively limited to trips originating or destined to a specific TAZ.
- **PNR Connector:** Segments that represent access links between Metrorail/commuter rail/light rail PNR lots and the highway network. These are two-way links, traffic is not "loaded" on these types of links; they are used for the sole purpose of developing congested TAZ-to-PNR travel times.
- **Highway Links:** These represent the major highway segments in the regional network on which regional traffic is "loaded." The segments are comprised of freeway, expressway, arterial, and collector facilities and do not include local streets. Freeway links are usually coded by direction, as two "one-way" links. In contrast, most non-freeway segments are represented as a single "two-way" facility. Freeway ramps are included in the regional network but are not represented as a "cloverleaf." Instead, ramps are coarsely represented, and the regional model does not furnish accurate ramp volumes.
- **"Transit Only" Links:** There are two types of transit-only links. The **first** type are links that truly are restricted to only transit vehicles. An example would be a rail link for Metrorail or commuter

rail, or a BRT link that allows only BRT vehicles. This type of transit-only link exists in the transit network but not in the highway network. The **second** type of transit-only link exists in the highway network. In general, transit links are not a part of the highway network. However, to develop a transit network, one begins with the highway network as the base, or, more specifically, those links in the highway network that carry bus service. In some cases, bus service may operate on a road segment that is below the grain of the highway network. In these cases, TPB staff adds a transit-only link to the highway network so that bus service can use this link. Since it is transit-only, a transit-only link in the highway network is excluded from the traffic assignment process. Thus, regional traffic is not loaded onto transit-only links in the highway network.

## 2.5 Transit Network Elements

The transit system contains some components of the highway system described above as well as additional transit-related “point” and “segment” elements that are necessary for transit path building. The TPB transit network consists of a combination of the highway network along with transit-related elements. The transit elements are listed and described below:

- **Rail Stations:** Point locations where travelers may board or alight from fixed-guideway transit service, including Metrorail, commuter rail, light rail, streetcar, and BRT.
- **Transit PNR Lots:** Park-and-Ride lot point locations. It is assumed that “auto-access” trips originating from TAZ centroids park at these locations, prior to boarding at rail stations or at bus stops (most typically express bus stops).
- **Rail Links:** These represent fixed guideway (Metrorail, commuter rail, light rail, streetcar and BRT) segments that connect rail stations and are part of the background highway network. With the transition from the TRNBUILD transit path builder to the Public Transport (PT) transit path builder, there will no longer be as much of a distinction between a highway network and a transit network – there will just be a transportation network, containing both highway and transit links in one network.
- **PNR Lot-to-Station Walking Links:** Links representing sidewalks between the PNR lot and the rail station.
- **Bus-to-Station Transfer Links:** Links representing sidewalks between bus stops and rail stations.
- **Walk Access Links:** Walk connections between zone centroids and transit stops accessible from the TAZ.
- **Auto Access Links:** Auto connections between the zone centroid and proximate PNR lots.
- **Sidewalk Links:** All highway links, other than freeways and expressways that are available for accessing transit from a zone centroid or are available for transferring between transit modes.
- **Transit lines/routes:** These are the individual transit routes that are in service during specific time periods. Transit lines are categorized among “modes” which distinguish basic service types (including, for example, Metrorail lines). The “line” files contain key words/general characteristics mode, average headway, average end-to-end running time, and a one- or two-way indicator) as well as the route delineation, which is expressed as a node string. The route

delineation of bus-related modes is defined as a series of highway nodes. In the route delineation, node numbers without a “-” sign represent stops while those with a “-” sign in the front are non-stops. Rail related route delineation is defined as a series of station nodes. In TRNBUILD, the transit line files are text files and have file extensions of “TB”. In the future, we will transition to Public Transport (PT) and, at that time, the files will be in PT format, which will likely be indicated in the file name or the file extension (e.g., MODE1AM.LIN).

Most of the highway and transit network inputs are files that contain attributes of elements listed above. These attributes describe the physical location of nodes and the physical characteristics of links, such as the number of lanes, distance, and the facility classification. These are specified in Chapter 3.

## 2.6 Overview of Network Travel Costs

The Gen2/Version 2.4.6 Travel Model, like all the models in the Gen2 family of models, requires several traveler out-of-pocket cost inputs. Most of the traveler costs are network-related or path-related elements. All cost inputs are either prepared in constant-year (year-2018) prices (dollars or cents) or are converted to constant-year prices as part of the model application process. The year 2018 is the model “base-year” because that was the year when model calibration data was collected (primarily, the 2017/2018 Regional Travel Survey data). The travel model currently considers five travel cost components each affecting different steps of the travel model:

- Transit related
  - Transit fares
  - Parking costs associated with drive-access to transit (parking at a PNR lot)
- Highway related
  - Highway tolls
  - Parking costs associated with a non-transit trip
  - Other auto operating costs (distance based)

Transit fares are computed within the model stream in terms of current-year prices and are ultimately converted to constant-year prices. PNR-related parking costs are provided for both the peak and off-peak period. These PNR parking costs are stored in the station file (station.dbf). Current-year highway tolls are obtained from the appropriate websites and coded into the network. For forecast years, tolls are estimated in a semi-automated toll setting process (see, for example, the current TPB model user’s guide). Both PNR parking costs and tolls are coded as input variables in current-year prices.

As suggested by the list above, parking costs associated with auto trips are handled separately from parking costs for transit trips. Specifically, parking costs associated with auto trips are calculated using a parking cost model, which is applied with the Cube Voyager script *prefarv23.s*. These parking costs are a function of job density, in the destination TAZ. This script also calculates “terminal time,” i.e., the time to park and un-park a car at either end of an auto trip (see section 21.7 of the Gen2/Version 2.4.6 Travel model user’s guide). Since these parking costs are calculated with a parking cost model, the network

coder does not have to collect this information. Lastly, auto operating costs are computed directly in year-2018 prices, based on a single per-mile parameter.

PNR lot costs are coded as a station node attribute in the network input files in current-year cents. PNR lot costs, like tolls, are used exclusively in the development of rail-related transit paths. PNR lot costs may be altered with “shadow-price” variables that also exist in the station file for calibrating auto access demand at specific rail stations. One could make use of shadow prices to adjust the demand (up or down) at one or more PNR lots, to better reflect observed behavior. Shadow prices are available, but they have not been used in the current travel model. For more information, see chapter 21 of the current Gen2/Version 2.4.6 Travel Model User’s Guide. Also, unlike the other cost components, the PNR lot cost is not considered in the mode choice modeling process.

Highway tolls are coded on a highway network on a link-by-link basis and are specified either as a flat cost or as a per-mile rate. Highway tolls are rather unique cost components in that they affect the construction of highway paths. Most conventional travel models build minimum-impedance paths based on congested travel time. The TPB model builds highway paths based on a generalized cost function that equals the congested travel time plus the travel time equivalent of toll costs as well as an extra penalty for trips crossing the Potomac River. The monetary toll cost between a pair of origin/destination zones therefore comprises of tolls charged on any toll segments along the minimum generalized cost path.

Zone-to-zone transit fares are computed in a way that mimics WMATA’s actual fare policy. The computation involves two steps: 1) the calculation of Metrorail fares between stations using WMATA policy parameters and 2) combining Metrorail fares between stations with bus/commuter rail fares between “Bus Fare Zones” which are entered as an input. Bus Fare Zones are currently 21 “macro areas” of the region that approximate WMATA policy areas and other transit market areas. The transit fares are dependent on minimum perceived time paths between TAZ that include Metrorail defined boarding and alighting stations if Metrorail use is included within the path.

## **2.7 Node Numbering System**

The various node groups are numbered in the network in a structured way. Structured node numbering is useful because it facilitates network integrity checks and network mapping. It is also important because model application programs reference predefined TAZs and node numbers and node ranges for the purposes of indexing or dimensioning.

An overview of the node numbering system that has been adopted for highway and transit networks on the 3,722-TAZ system is shown in Table 2-3. The numbering system allocates nodes from lowest to highest TAZs, station nodes, PNR lot nodes, and finally to highway nodes.

Table 2-3 TAZ/node numbering system overview

Node Type	Jurisdiction	Beginning TAZ / Node	Ending TAZ / Node	TAZ / Node Count
<b>TAZ Centroids</b>	Internal TAZs	1	3675	3,675
	External Stations:	3676	3722	47
	Reserved TAZ numbers	3723	5000	1,278
<b>Highway Network Nodes</b>	Highway Nodes:	20000	54999	35,000
<b>Transit Nodes</b>	Transit Station Nodes	8000	10999	3,000
	Transit PNR Lot Nodes	11000	13999	3,000
	Transit Reserved Nodes	14000	14999	1,000
		16000	19999	4,000

Note: 13 Internal TAZs are unused

Ref: "I:\ateam\docum\FY25\Visualize2050\_Network\_Report\Tables\3722TAZ\_Master\_Node\_Table\_Dec\_2024.xlsx"

The sub-allocation of transit nodes above is further detailed in Table 2-4 and Table 2-5.

Table 2-4 Node numbering system for transit nodes

Node Type	Beginning TAZ / Node	Ending TAZ / Node	TAZ / Node Count
Metrorail Station Node:	8000	8999	1000
<b>Commuter Rail Station Node:</b>	<b>9000</b>	<b>9999</b>	<b>1000</b>
MARC Stations	9000	9050	51
VRE Stations	9051	9199	149
External dummy stations	9200	9999	800
Light Rail Station Node:	10000	10499	500
BRT Street car Station Node:	10500	10999	500
Metrorail PNR Lot Node:	11000	11999	1000
Commuter PNR Lot Node:	12000	12999	1000
LRT/Bus PNR Lot Node:	13000	13999	1000
Bus/PNR drive way Node:	15001	15999	1000
Reserved Transit Nodes	14000	14999	1000
	16000	19999	4000

**Note: - Union Station 9001 is both a VRE and a MARC station**  
**- 9200, 9201,9202 External dummy MARC stations are assigned for Penn Line, Cameden Line, and Brunswick Line, respectively.**

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\3722TAZ\_Master\_Node\_Table\_Dec\_2024.xlsx"

Highway node numbers are allocated in discrete ranges by jurisdiction, as shown in Table 2-5.

Table 2-5 Allocated highway node ranges by jurisdiction

Jurisdiction	Current			Additional (Current + 100000)		
	Beginning Node	Ending Node	Allocated Nodes	Beginning Node	Ending Node	Allocated Nodes
District of Columbia	20000	21999	2000	120000	121999	2000
Montgomery Co., MD	22000	25999	4000	122000	125999	4000
Prince George's Co., MD	26000	29999	4000	126000	129999	4000
Arlington Co., VA	30000	31999	2000	130000	131999	2000
City of Alexandria, VA	32000	33999	2000	132000	133999	2000
Fairfax Co., VA	34000	37999	4000	134000	137999	4000
Loudoun Co., VA	38000	39999	2000	138000	139999	2000
Prince William Co., VA	40000	41999	2000	140000	141999	2000
Frederick Co., MD	42000	43999	2000	142000	143999	2000
Howard Co., MD	44000	45499	1500	144000	145499	1500
Anne Arundel Co., MD	45500	46999	1500	145500	146999	1500
Charles Co., MD	47000	47999	1000	147000	147999	1000
Carroll Co., MD	48000	48999	1000	148000	148999	1000
Calvert Co., MD	49000	49499	500	149000	149499	500
St. Mary's Co., MD	49500	49999	500	149500	149999	500
King George Co., VA	50000	50499	500	150000	150499	500
City of Fredericksburg, VA	50500	50999	500	150500	150999	500
Stafford Co., VA	51000	51999	1000	151000	151999	1000
Spotsylvania Co., VA	52000	52999	1000	152000	152999	1000
Fauquier Co., VA	53000	53999	1000	153000	153999	1000
Clarke Co., VA	54000	54499	500	154000	154499	500
Jefferson Co., WVA	54500	54999	500	154500	154999	500
Reserved Nodes	90000	90999	1000			

Ref: "I:\ateam\docum\FY20\memos\Memo\_Ver\_2\_3\_86\_node\_range\_extension\_04062020\_v2.docx"

In November 2017, Montgomery County staff asked for an unused node range to be reserved exclusively for Montgomery County studies where more detailed coding is included in the highway networks, to avoid the possibility of using the same node numbers in different locations. The range from 90000-90999 was reserved for that purpose, to be used by Montgomery County staff and consultants.

In April 2020, as the allocated node numbers ("Current" node numbers in the table above) were running out especially in Washington, D.C. and Montgomery County, staff created additional node number ranges ("Additional" in the table above) for each jurisdiction in the modeled area.<sup>11</sup>

<sup>11</sup> Sanghyeon Ko and Feng Xie to Mark Moran, "Node range extension for TPB Travel Demand Model and test results with Version 2.3.86 Model", MWCOG/TPB Memorandum, April 16, 2020

### 3 Cube Voyager Network Inputs

Chapter 2 provided a broad overview of the TPB transportation networks in terms of the TAZ system, network elements, and node numbering conventions. This chapter presents more detail on the specific network input files that are prepared, which include policy-related inputs as well as infrastructure-related inputs. The input files are presented in four sub-sections: cost deflation inputs, highway network inputs, transit network inputs, and transit fare inputs.

It is important to note that all input filenames used by the TPB travel demand model are assigned generic names, such as “link.dbf”. The Gen2/Version 2.3 and Version 2.4 family of travel models identifies modeled scenarios using scenario-specific *subdirectories*, each containing generic input *filenames*. While this approach might appear confusing and error prone, TPB staff has grown comfortable with the application approach for several years. More details on the TPB’s model application may be found in the travel model user’s guide (chapter 4).

#### 3.1 Cost Deflation Inputs

The Gen2/Version 2.4.6 model application includes a procedure that creates an inflation/deflation factor for converting current-year monetary costs into constant-year (year-2018) costs. The factor is used in subsequent steps and applied to highway tolls and transit fares. The cost deflation factor information is stored in a user-prepared parameter file, shown in Figure 3-1. The file contains the historical year-to-year consumer price index (CPI) schedule published by the Bureau of Labor Statistics (BLS). The specific CPI index definition used for deflating modeled transportation costs is defined as “All Urban Consumers/U.S. city average for all items (1982-84=100).” The following link was used to obtain historical CPI data:

[https://www.bls.gov/regions/mid-atlantic/data/consumerpriceindexannualandsemiannual\\_table.htm](https://www.bls.gov/regions/mid-atlantic/data/consumerpriceindexannualandsemiannual_table.htm)

The CPI parameter file (Figure 3-1) is usually updated at the beginning of an LRTP update cycle.<sup>12</sup> The file contains a table showing the annual CPI starting from 2018 to the most recent historical year. The table also includes the computed average annual growth rate and the deflation factor implied from the base year to the current year. The deflation rate for converting current-year costs is based on the historical rate of inflation defined as the base-year CPI divided by current-year CPI (the most recent year for which annual CPI data is furnished). As shown in the parameter file, the existing deflation factor for the current year (2023) is 0.8241. In the recent past, the CPI has grown about 2% a year, which is indicated as the solid red line in Figure 3-2. TPB travel forecasts generally assume that future cost escalation will follow the historical rate of inflation.

---

<sup>12</sup> Meseret Seifu to Mark S. Moran et al., “Update of the CPI Schedule to be used in the Gen3/Version 1.0.0 Travel Model,” Memorandum, April 15, 2024.

Figure 3-1 Cost deflation parameter file (CPI\_File.txt)

```

;; - MWCOG Gen3 Travel Model - Cost deflation Table
;; - 4/15/2024 - MS
;; Data from BLS / All Urban Consumers (CPI-U) US City Avg.1982-84=100.0
;; https://www.bls.gov/regions/mid-atlantic/data/consumerpriceindexannualandsemiannual_table.htm


InflationFTR      = 1.0    ;; Inflation Assumption (DEFAULT IS 1.0)
Defl_Override     = 0.0    ;; Deflation Override (DEFAULT IS 0.0) If Non-zero it is used as
deflator          ; Used as deflator IF NON-ZERO
BaseCPIYear       = 2018   ;; Base year of the CPI Table
CurrCPIYear       = 2023   ;; Current year on CPI Table
;
; =====
; Establish historic CPI table and Deflation Factor =
; =====
;
LOOKUP Name=CPI_Table,
LOOKUP[1] = 1,Result = 2,      ;; CPI index (from US BLS)
LOOKUP[2] = 1,Result = 3,      ;; Compounded Growth Rate From Base Year
LOOKUP[3] = 1,Result = 4,      ;; Deflation Factor
Interpolate = N, FAIL=0,0,list=Y,
;;
;;      ((YrCPI/BsCPI)^(1/n))-1.0)*100   BsCPI/YrCPI
;;      Annual Avg.                      Historic Deflation
;;      Growth Rate(%)                   Factor
;;      -----
R=' 2018, 251.107,      0.00,      1.0000 ' ;; <--- BaseCPIYear
' 2019, 255.657,      1.81,      0.9822 ' ;;
' 2020, 258.811,      1.52,      0.9702 ' ;;
' 2021, 270.970,      2.57,      0.9267 ' ;;
' 2022, 292.655,      3.90,      0.8580 ' ;;
' 2023, 304.702,      3.94,      0.8241 ' ;; <--- CurrentCPIYear

; --- end of CPI File -----
;

```

Ref: "I:\ateam\mod\_inputs\CPI\2023\CPI\_GEN3\_Ver.1.0.0\CPI\_File.txt"

Figure 3-2 Projected CPI escalation at varying annual growth rates

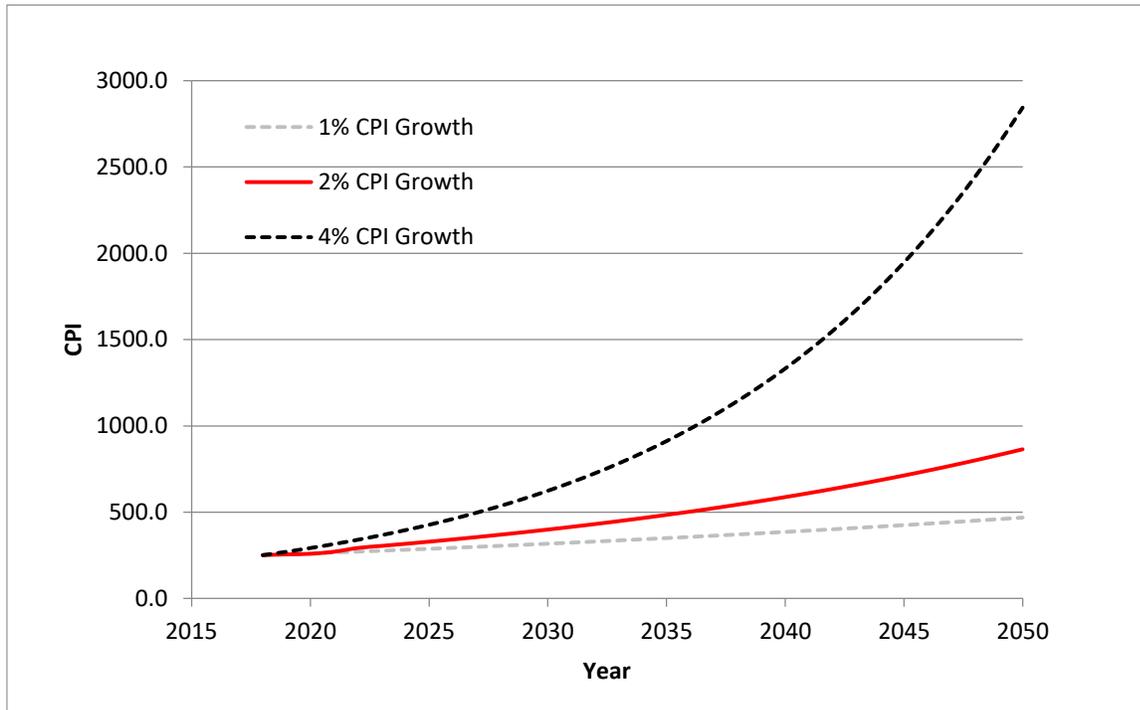


Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\CPI\_Gen3\_Ver.1.0.3.xlsx"

The InflationFTR variable (“inflation/deflation factor” variable) enables one to investigate varying future cost escalation scenarios. An InflationFTR value of “1.0” implies that future costs will escalate directly with the historical CPI growth rate. The parameter may be changed to, for example, “0.5” to reflect cost growth at one-half of the historical growth rate or to “2.0” to reflect cost growth at twice the historical growth rate, etc. The dashed lines in Figure 3-2 indicate how project cost escalation for these types of scenarios compare with the TPB’s default cost escalation assumption.

The CPI\_File.txt file is called into the SET\_CPI.S script as shown in Figure 3-3. The script writes out two one-line text files containing the deflation factors that are used to convert current year highway and transit costs to constant-year costs, respectively, in subsequent modeling steps. The MFARE2\_CPI.txt file contains summary CPI information.

Figure 3-3 Deflation process in the Gen2/Version 2.4 Travel Model

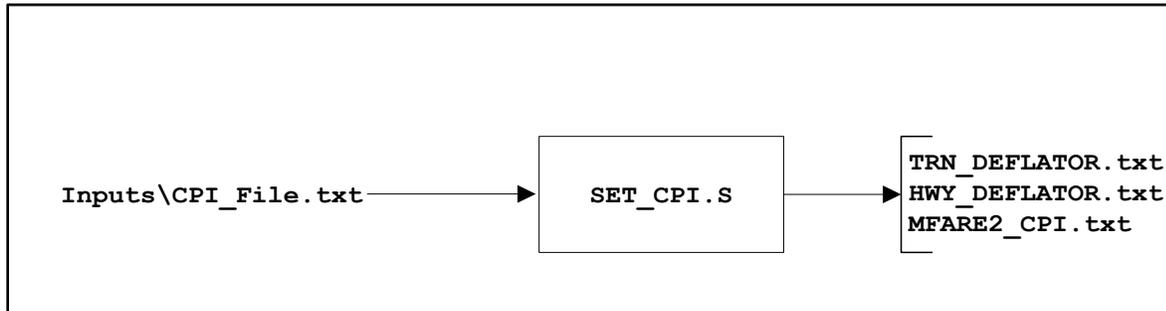

### 3.2 Highway Network Files

A list of user-generated highway network inputs is provided in Table 3-1. The list includes a node file, a link file, a zonal land activity file, and a toll parameter file. The files are read into Cube Voyager scripts and are ultimately converted into a single binary or “built” network file (\*.NET). Binary networks are used in the travel model application because they enable the software to process network-related operations more efficiently. The binary network ultimately created from the TPB “network building” process is named *zonehwy.net*. This file is sometimes referred to as an “unloaded network” file because it does not include link volumes resulting from the traffic assignment step.

Table 3-1 also indicates the source of the files. The highway node and link file are developed from a multi-year and multi-modal unified geodatabase that is discussed in Chapter 4. Other inputs relating to zonal land activity and policy parameters are generated either manually or by offline procedures.


Table 3-1 Listing of highway network input files

Filename	Description	Type	Source
Node.dbf	XY coordinates of nodes in highway network	DBF	Geodatabase
Zone.dbf	Land use/land activity data at zonal level, 3722 TAZ	DBF	Analyst-generated
Link.dbf	Highway network links	DBF	Geodatabase
Toll_Esc.dbf	Toll policy parameters by link "Tollgrp" code	DBF	Analyst-generated

Ref: "I:\ateam\docum\fy14\2013LRTP\_Network\_Report\v23\_inputs\_v10.xlsx"

The above files are used in a network building process that is shown in Figure 3-4. The process involves two steps, one that develops zonal area types (AreaType\_File.S) and another that “builds” the highway network (V2.3\_Highway\_Build.S). The inputs files and the two steps are described in more detail in the next sections of the report.

Figure 3-4 Highway network building process

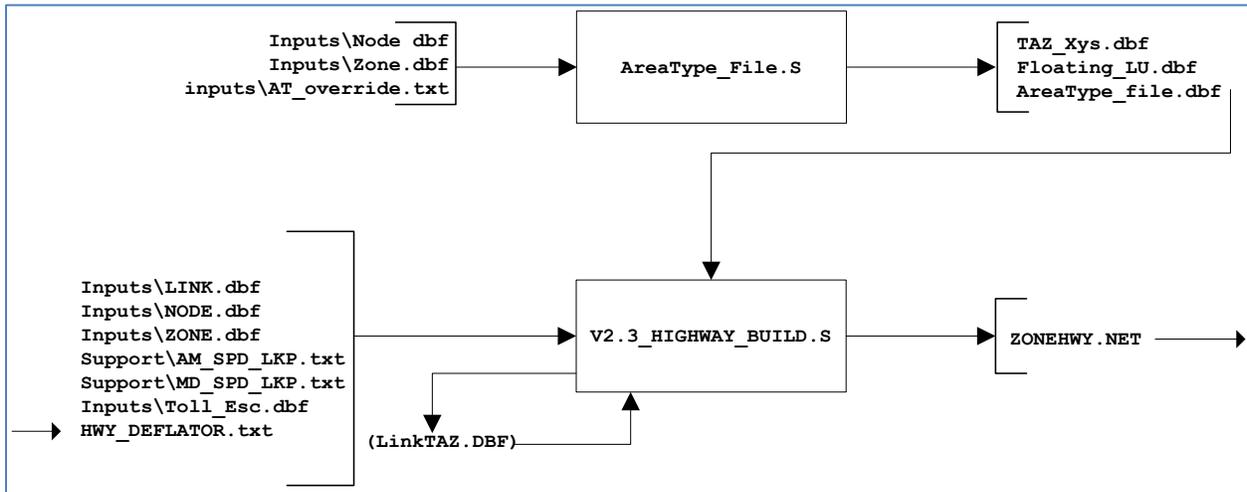

### 3.2.1 Zonal land use

The zone.dbf file contains zonal land activity and other items that are shown in Table 3-2. This file is created from a standard Cube Voyager process that reads a single, standardized, multi-year file from COG’s Cooperative Forecasts of land activity, creates individual (year-by-year) files, for the travel model, and includes additional zonal information that are required by the travel model. The most recent COG Cooperative Forecasts, Round 10 land activity was employed in the air quality conformity analysis of the Visualize 2050 and the FY 2026-2029 TIP. The Round 10 land activity totals for the modeled region are shown in Table 3-3. Cooperative Forecasts are prepared in five-year increments. If intermediate years are modeled, such as 2026 in the Visualize 2050 plan analysis, the land activity values are linearly interpolated.

Table 3-2 Format description of the land use file (zone.dbf)

File Name	Variable Name	Description
Zone.dbf	TAZ	TAZ (1-3,722)
	HH	Households
	HHPOP	Household Population
	GQPOP	Group Quarters Population
	TOTPOP	Total Population
	TOTEMP	Total Employment
	INDEMP	Industrial Employment
	RETEMP	Retail Employment
	OFFEMP	Office Employment
	OTHEMP	Other Employment
	JURCODE	Jurisdiction Code (0-23) 0/DC, 1/MTG, 2/PG, 3/ALR/, 4/ALX,5, FFX, 6/LDN, 7/ PW, 8/(unused), 9/ FRD, 10/HOW, 11/AA, 12/CHS, 13/(unused), 14/CAR, 15/CAL, 16/STM, 17/ KG, 18/FBG, 19/STF, 20/SPTS, 21/FAU, 22/CLK, 23/JEF
	LANDAREA	Gross Land Area (in sq. miles)
	HHINCIDX	Ratio of zonal HH median income to regional median HH income in tenths (i.e. 10 = 1.0), per 2000 CTPP. <sup>12</sup>
	ADISTTOX	Airline distance to the nearest external station in whole miles.
TAZXCRD	TAZ X-Coordinates (NAD83-based in whole feet)	
TAZYCRD	TAZ Y-Coordinates (NAD83-based in whole feet)	

Before the zone-level land activity data can be used as an input to the travel model, it must undergo an adjustment process, known as the employment definition adjustment, which ensures that all counties and jurisdictions in the modeled area use a consistent employment definition. The reason for this adjustment is that different jurisdictions in the modeled area, which covers DC, Maryland, Virginia, and one county in West Virginia, use different definitions of employment.

Table 3-3 Round 10 Cooperative Forecasts regional totals by year

Year	HH	HHPOP	GQPOP	TOTPOP	TEMP
2020	2,762,121	7,369,058	134,060	7,503,118	3,945,666
2025	2,924,239	7,682,520	136,093	7,818,613	4,187,436
2030	3,092,815	8,054,341	141,003	8,195,344	4,416,890
2035	3,249,319	8,396,507	142,828	8,539,335	4,645,724
2040	3,396,571	8,722,165	143,912	8,866,077	4,835,661
2045	3,533,770	9,040,591	145,117	9,185,708	5,021,895
2050	3,669,571	9,333,799	146,663	9,480,462	5,205,714

**Note:** These values include the employment definition adjustment factor that ensures that a consistent definition of employment is used across the modeled area.

Ref: "I:\ateam\mod\_inputs\lu\rnd\_10\_0\_taz3722\memo\Tables\ tables\_in\_memo\_v01.xlsx (Tab: Table7\_Figure2)"

### 3.2.2 Highway Link and Node Coordinate Files

The link.dbf file contains the attributes of individual highway segments (links) that comprise the highway network. The link attributes are shown in Table 3-4. A row in this DBF file is uniquely defined by the A-Node/B-Node pair. The link.dbf file describes basic characteristics of individual highway segments including distance, the number of directional lanes by time-of-day period (??LANE), directional user-market enable or disable codes (??LIMIT), and facility type (FTYPE). These highway network link key attributes are described in this section.

Table 3-4 Base highway link file description (link.dbf)

File Name	Variable Name	Description
Link.dbf	A	A-Node
	B	B-Node
	DISTANCE	Link distance (in whole miles w/explicit decimal)
	JUR	Jurisdiction Code (0-23) 0/DC, 1/MTG, 2/PG, 3/ALR/, 4/ALX,5, FFX, 6/LDN, 7/ PW, 8/(unused), 9/ FRD, 10/HOW, 11/AA, 12/CHS, 13/(unused), 14/CAR, 15/CAL, 16/STM, 17/ KG, 18/FBG, 19/STF, 20/SPTS, 21/FAU, 22/CLK, 23/JEF
	SCREEN	Screenline Code
	FTYPE	Link Facility Type Code (0-6) 0/centroids, 1/Freeways, 2/Major Art., 3/Minor Art, 4/ Collector, 5/ Expressway, 6/ Ramp
	TOLL	Toll Value in current year dollars
	TOLLGRP	Toll Group Code
	AMLANE	AM Peak No. of Lanes
	AMLIMIT	AM Peak Limit Code (0-9)
	PMLANE	PM Peak No. of Lanes
	PMLIMIT	PM Peak Limit Code (0-9)
	OPLANE	Off-Peak No. of Lanes
	OPLIMIT	Off-Peak Limit Code (0-9)
	EDGEID	Geometric network link identifier
	LINKID	Logical network link identifier

File Name	Variable Name	Description
	NETYEAR	Planning year of network link
	SHAPE_LENGT	Geometric length of network link (in feet)
	PROJECTID	Project identifier
	TRANTIME	New Unused (place markers for Gen3 Model)
	WKTIME	
	MODE	
	SPEED	
	Street Name	Street/Road name

The highway network node file, node.dbf (Table 3-5), contains the XY coordinates for both TAZs and highway nodes, as well as fare zone information for Metrorail and commuter rail.

Table 3-5 : Highway node file description

File Name	Variable Name	Description
<u>Node.dbf</u>	N	TAZ or Highway Node Number
	X	X - Coordinates (NAD83-based in whole feet)
	Y	Y- Coordinates (NAD83-based in whole feet)

Road attributes that may vary by time of day are represented by three sets of link attributes named <prd>lane and <prd>limit, where <prd> is “AM”, “PM”, and “OP.” The lane attribute describes the number of directional effective through lanes in operation during the period. The limit attribute assigns special market prohibitions that exist during a given time-of-day period. The limit prohibitions indicate 1) whether the directional link is available to traffic during the period or 2) whether the link is available to certain markets only during specific time periods or during the entire day. In many cases, lane coding is related to limit coding. The limit codes currently used by the model are presented in Table 3-6.

Table 3-6: Limit codes

Limit Code	Vehicles Allowed
0	All Vehicles
2	HOV 2+ Occ. Vehicles
3	HOV 3+ Occ. Vehicles
4	All Vehicles, other than trucks
5	Airport Passenger Auto Driver Trips
9	Transit Only

Limit and lane codes are used to reflect changes in directional-lane configurations, a variety of HOV operations, and truck prohibitions (primarily on parkways). Limit coding is also used to identify “Transit Only” links (limit code = 9), which were discussed in section 2.4 (“Highway Network Elements”). These types of links are excluded from the highway assignment process because they are below the grain of both the zone system and the roadways included in the networks.

The third input file to AreaType\_File.s (Figure 3-4) is a file that allows one to make an override of an area type value (AT\_override.txt). For example, the area-type of the TAZ containing the Pentagon might be calculated as a 3 (“Medium employment density”), but one could override this value with a 1 (“High mixed employment and population density”). More details can be found in the travel model user’s guide.


### **3.2.3 Roadway Functional Classification and the Facility-Type Variable**

Roads/highways are typically classified into a hierarchical system that indicates their design and the type of traffic they are designed to serve. The classic hierarchy is

- Freeways
- Arterials
- Collectors
- Local roads

Higher level roads, such as freeways, have an emphasis on mobility and traffic movement. Lower level roads, such as collectors and local roads, have an emphasis on land access. This continuum is shown graphically in Figure 3-5.

Figure 3-5 Classification of roads and their emphasis on mobility and access

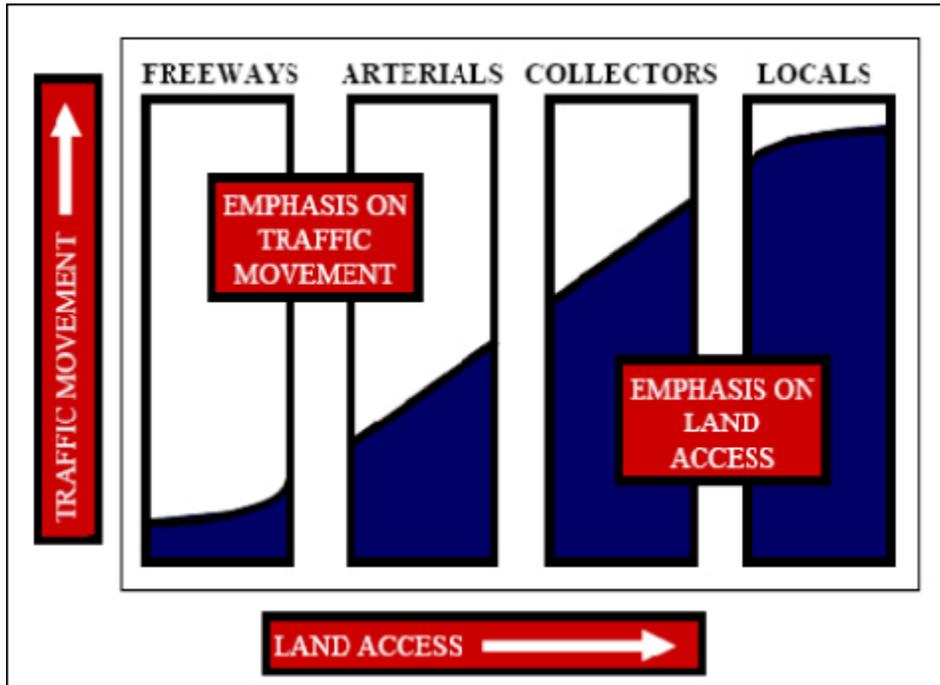

Source: <sup>13</sup>


Figure 3-6 shows examples of the different types of roads. In COG/TPB highway networks, the facility-type (FTYPE) code is used to designate the hierarchy of road types. Facility-type codes are defined as:

- 0: centroid connectors
- 1: interstates and freeways
- 2: major arterials
- 3: minor arterials
- 4: collectors
- 5: parkways and expressways with at-grade intersections
- 6: freeway and expressway ramps

The highest-class roads in TPB networks are interstates/freeways (FTYPE=1) and parkways/expressways (FTYPE=5). The lowest-class roads in TPB networks are collectors (FTYPE=4). Note that local roads are not typically part of TPB networks, but each centroid connector represents one or more local roads that are not explicitly represented.

<sup>13</sup> BLF Marketing, Wilbur Smith Associates, Inc., and RKG Associates, Inc., "Clarksville SMART GROWTH Plan – 2030: A Blueprint for Progress and Quality ... as We Grow to 250,000 Residents" (Clarksville, Tennessee, July 23, 2010), chap. 3, <http://www.clarksvillesmartgrowth.com/Sec3-TransportationAnalysis.htm>.

Figure 3-6 Example of different types of roads

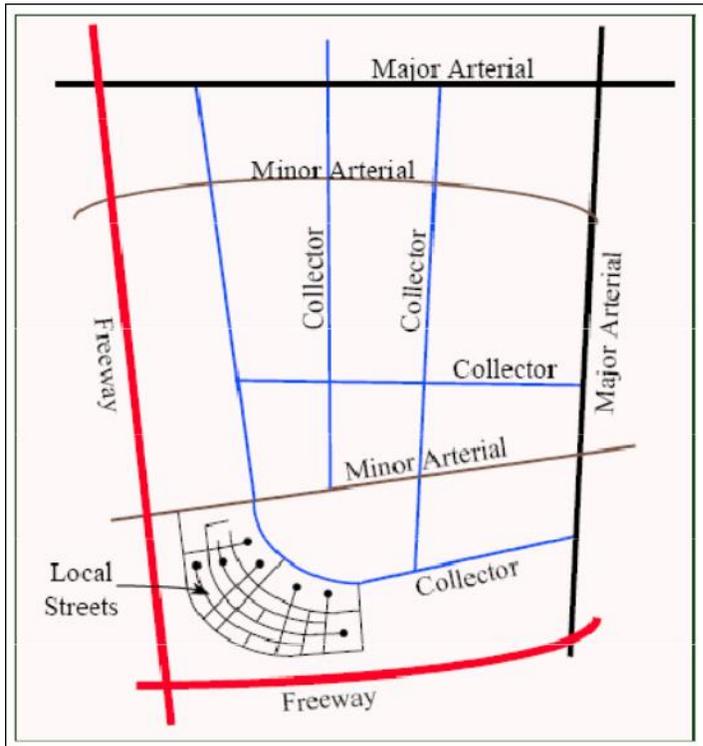

Source: <sup>14</sup>

The facility type (FTYPE) attribute is used in conjunction with an area-type indicator (ATYPE) to establish modeled free-flow speeds and hourly capacity.

The federal government has its own classification scheme, called the federal functional classification system.<sup>15</sup> While there is a correlation between TPB facility-type codes and the federal functional classification system, there are numerous exceptions. For example, facilities categorized as freeways in the federal system may be coded as expressways in the TPB network, or expressways in the federal system may be coded as freeways. These types of classification adjustments are ultimately made to ensure that the facility usage and operation are accurately represented in the travel model. It should also be noted that the “ramp code” (FTYPE=6) was added to the facility code list in FY 2003 to support an EPA requirement associated with estimating emissions specific to ramps.

### 3.2.4 Other link attributes

Modeled link free-flow speeds and capacities are based on the facility type (FTYPE) and area type (ATYPE) variables. The area type identifies, in broad terms, the level of land development around each

<sup>14</sup> BLF Marketing, Wilbur Smith Associates, Inc., and RKG Associates, Inc., chap. 3.

<sup>15</sup> “Highway Functional Classification Concepts, Criteria and Procedures” (Washington, D.C.: U.S. Department of Transportation, Federal Highway Administration, 2013), [https://www.fhwa.dot.gov/planning/processes/statewide/related/highway\\_functional\\_classifications/fcauab.pdf](https://www.fhwa.dot.gov/planning/processes/statewide/related/highway_functional_classifications/fcauab.pdf).

highway link. The area type variable is not included in the link.dbf file, but rather, is dynamically generated during the highway network building process:

- In the AreaType\_File.s script, a “1-mile floating” land use density is computed for each TAZ. The floating density for a given TAZ equals the accumulated land activity of the TAZ, plus the land activity of all proximate TAZs within a one-mile radius, divided by the similarly accumulated land area. Floating population and floating employment figures are computed for each TAZ. The one-mile radius is evaluated based strictly on centroid positioning.
- Each TAZ is assigned an area type (integer) value of 1 to 6 based on the joint population and employment density ranges defined in Table 3-7; the names of the six area types, as well as examples of each type, can be found in Table 3-8.
- The mid-point of each highway link is evaluated against all TAZ centroid positions. Each link is then assigned the area type value associated with the nearest TAZ.

Table 3-7 Area-type codes, from 1 to 7, based on population and employment density


One-Mile “Floating” Population Density (Pop/Sq mi)	One- mile “Floating” Employment Density (Emp/Sq mi)						
	0-100	101-350	351-1,500	1,501-3,550	3,551-13,750	13,751-15,000	15,001+
0-750	6	6	5	3	3	3	2
751-1,500	6	5	5	3	3	3	2
1,501-3,500	6	5	5	3	3	2	2
3,501-6,000	6	4	4	3	2	2	1
6,001-10,000	4	4	4	2	2	2	1
10,000-15,000	4	4	4	2	2	2	1
15,001+	2	2	2	2	2	1	1

Table 3-8 The six area-type codes and examples of each area type

Area Type	Name	Examples
1	High mixed employment and population density	<ol style="list-style-type: none"> <li>1. Downtown DC, between Georgetown, Florida Ave., and 11<sup>th</sup> St. NE &amp; SE</li> <li>2. Old Town Alexandria</li> <li>3. The Rosslyn/Court House area of Arlington Co.</li> <li>4. Pentagon City area of Arlington Co.</li> <li>5. Downtown Bethesda, Maryland</li> <li>6. Center of Tysons Corner, Virginia</li> </ol>
2	Medium/high mixed density	<ol style="list-style-type: none"> <li>1. Most DC outside the downtown core</li> <li>2. Most Arlington Co., south of Lee Highway</li> <li>3. Most Alexandria</li> <li>4. Areas of Tysons Corner just beyond the center</li> <li>5. Annapolis, Maryland</li> <li>6. Downtown Frederick, Maryland</li> <li>7. Parts of Reston and Herndon, Virginia, along the Dulles Access/Toll Road</li> </ol>
3	Medium employment density	<ol style="list-style-type: none"> <li>1. Parts of upper NW DC near Rock Creek Park</li> <li>2. Parts of Arlington along Lee Highway</li> <li>3. National Airport</li> <li>4. The Pentagon</li> <li>5. Arlington Cemetery</li> <li>6. BWI Airport</li> <li>7. Potomac Mills mall in Woodbridge, Virginia</li> </ol>
4	Medium population density	<ol style="list-style-type: none"> <li>1. Parts of upper NW DC near Rock Creek Park</li> <li>2. Parts of north Arlington</li> <li>3. SE DC near the Capitol Heights Metrorail station</li> <li>4. Chevy Chase, Maryland, near the DC border</li> </ol>
5	Low density	<ol style="list-style-type: none"> <li>1. Area along McArthur Boulevard in DC</li> <li>2. Upper north Arlington Co.</li> <li>3. Fort Hunt section of Fairfax Co.</li> <li>4. Dulles Airport</li> <li>5. Andrews Air Force Base</li> </ol>
6	Rural	<ol style="list-style-type: none"> <li>1. Great Falls, Virginia</li> <li>2. Much of Loudoun Co., Virginia</li> <li>3. Most of Fauquier Co., Virginia</li> <li>4. Much of Charles, St. Mary's, and Calvert Counties, Maryland</li> <li>5. Most of Frederick and Carroll Co., Maryland</li> </ol>

Note that the Pentagon and Arlington Cemetery are categorized as area type 3 (“medium employment density”). This is due to the use of the one-mile floating density. Some could argue that Arlington Cemetery should be categorized as “rural” (area type 6) and that the Pentagon should be categorized as area type 2 (“medium/high mixed density”). A user of the travel model can, if they choose, override the calculated area-type values by using an override feature in the model. An example map of the six area types can be found in Figure 3-7.

Figure 3-7 Map of the six area types

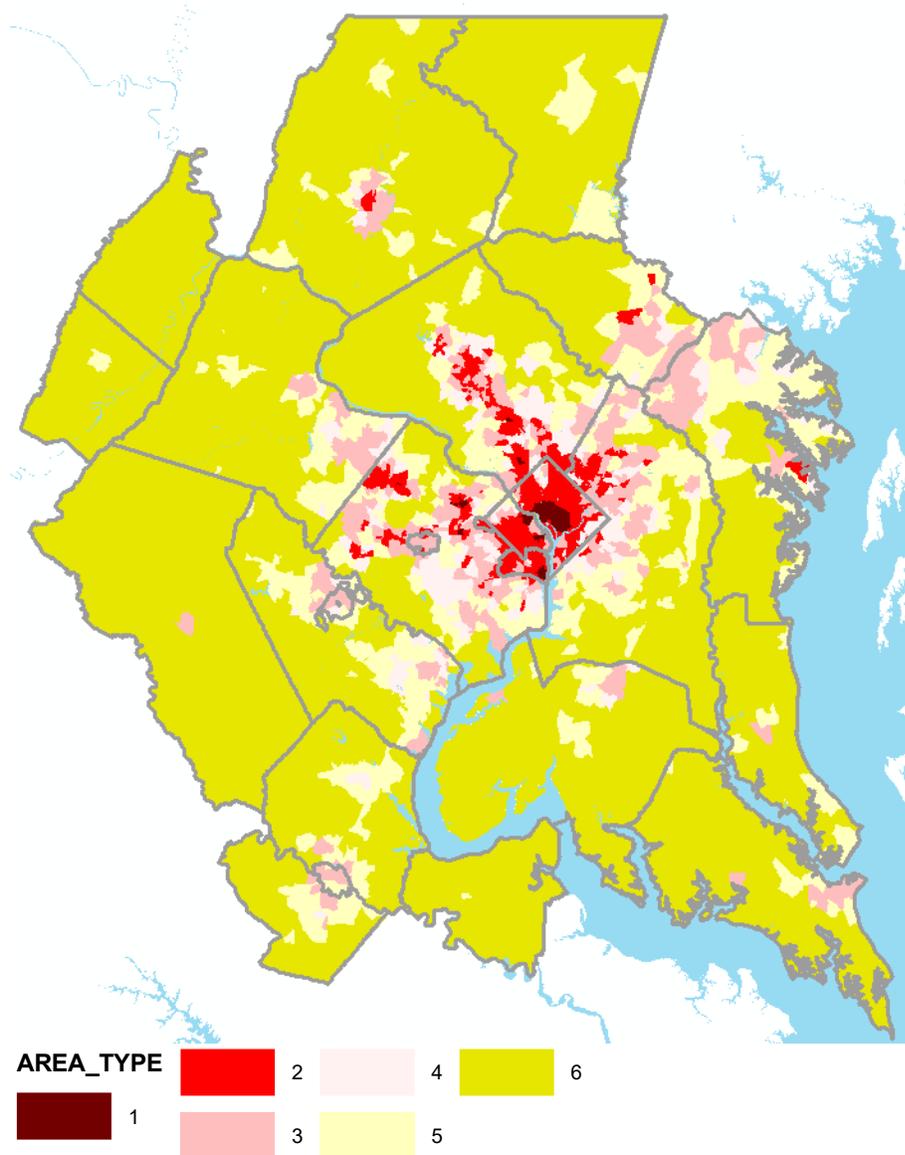

### 3.2.5 Toll Parameter File

The modeled area includes several currently existing toll facilities: In Virginia, HOT/express toll lane operations on I-95/I-395 between 14<sup>th</sup> Street Bridge and VA 17 (Warrenton Rd – exit 133) in Stafford County are included in all networks representing 2022 and beyond. In the Visualize 2050 Plan the I-95 express lanes (from the Springfield interchange to Opitz will convert from having reversible operation to having bi-directional operation in 2030. The I-395 HOV lanes from Turkeycock Run to just south of the 14<sup>th</sup> Street Bridge converted to HOT/express toll lanes in 2019. On I-495 (Capital Beltway) in Virginia HOT/express toll lane operations are included as follows:

- Beginning in 2013: From Hemming Avenue to south of Old Dominion Drive.
- Beginning in 2026: From south of Old Dominion Drive to the American Legion Bridge.

I-66 inside the Beltway converted to HOT/express toll lanes in 2017. HOT/express toll lanes on I-66 outside the Beltway to 1.2 miles west of US 15 are included in all networks starting in 2022.

In Maryland, the Intercounty Connector (ICC) is included in all networks representing 2012 and beyond. The toll rates used in the Visualize 2050 plan for ICC are effective as of Summer 2024.

On I-270, HOV lanes will be converted to HOT/express toll lane operations as follows:

- Beginning in 2030: I-270 western spur.
- Beginning in 2040: From I-270 on the easter spur from MD 187 (Old Georgetown Road) north to the main I-270.
- Beginning in 2045: I-270 spur to I-370.

Maryland Beltway I-495 HOT/express toll lanes from the Virginia state line (including the American Legion Bridge) to the I-270 western spur are included in all networks in 2035 and beyond as shown in Figure 3-8.

The Metropolitan Washington region includes several tolled highway facilities that vary substantially in tolling policy. On some facilities, such as the Dulles Toll Road and the Governor Nice Bridge, toll values are fixed and are not a function of the time of day or day of the week. On other facilities, toll rates can vary throughout the day, either set in advance, with “fixed” tolls that vary by specific times of the day, or set dynamically, as a function of real-time congestion levels. The Intercounty Connector (ICC), between Prince George’s County and Montgomery County, is an example of a facility where fixed toll rates vary by hour of the day, according to a schedule that has been set in advance. The high-occupancy/toll (HOT) lanes also on I-495, known as the I-495 Express Lanes, are an example of a toll facility where the toll rates are set dynamically, as a function of congestion levels. TPB staff reviews the tolling policy of private and publicly operated facilities each year and strives to produce reasonably representative toll values for each time-of-day period.<sup>16</sup>

Toll setting process is used to provide “planning-grade” toll estimates that serve as an indicator of travel demand patterns on the regional highway system of variably priced tolling facilities. In the Gen2 Model, the toll setting process is executed separately from the final model run.


There are two cost-related variables in the link.dbf file that allow the user to flexibly specify tolls in the network: the *TOLL* and *TOLLGRP* variables. The **TOLL** variable is a monetary value of the fee charged to traverse the link. The network database contains tolls for each year, up to the current year. This allows the user to produce a year-2024 network, for instance, that would contain the tolls as they were in 2024. For forecast years, the network contains the current year’s tolls in current-year cents. **TOLLGRP** is a variable that is used to identify tolling locations in the network. A TOLLGRP code of 1 identifies existing facilities where fixed-rate tolls are collected at specific locations. The Dulles Toll Road (VA 267) is an example of this. A TOLLGRP code of 2 identifies links on the ICC. A TOLLGRP code of 3 or more identifies links on a variably priced facility, such as the I-495 Express Lanes. The TOLLGRP rates are

---

<sup>16</sup> See, for example, Jane Posey to Files, “Visualize 2050 Toll Rates,” Memorandum, June 18, 2025.

estimated in the toll parameter/escalation file (TOLL\_ESC.dbf), which is subsequently used as the input to the final model run. Table 3-9 lists the specific variables in the file.

Figure 3-8 Existing and the Visualize 2050 Managed-lane facilities in the regional highway networks

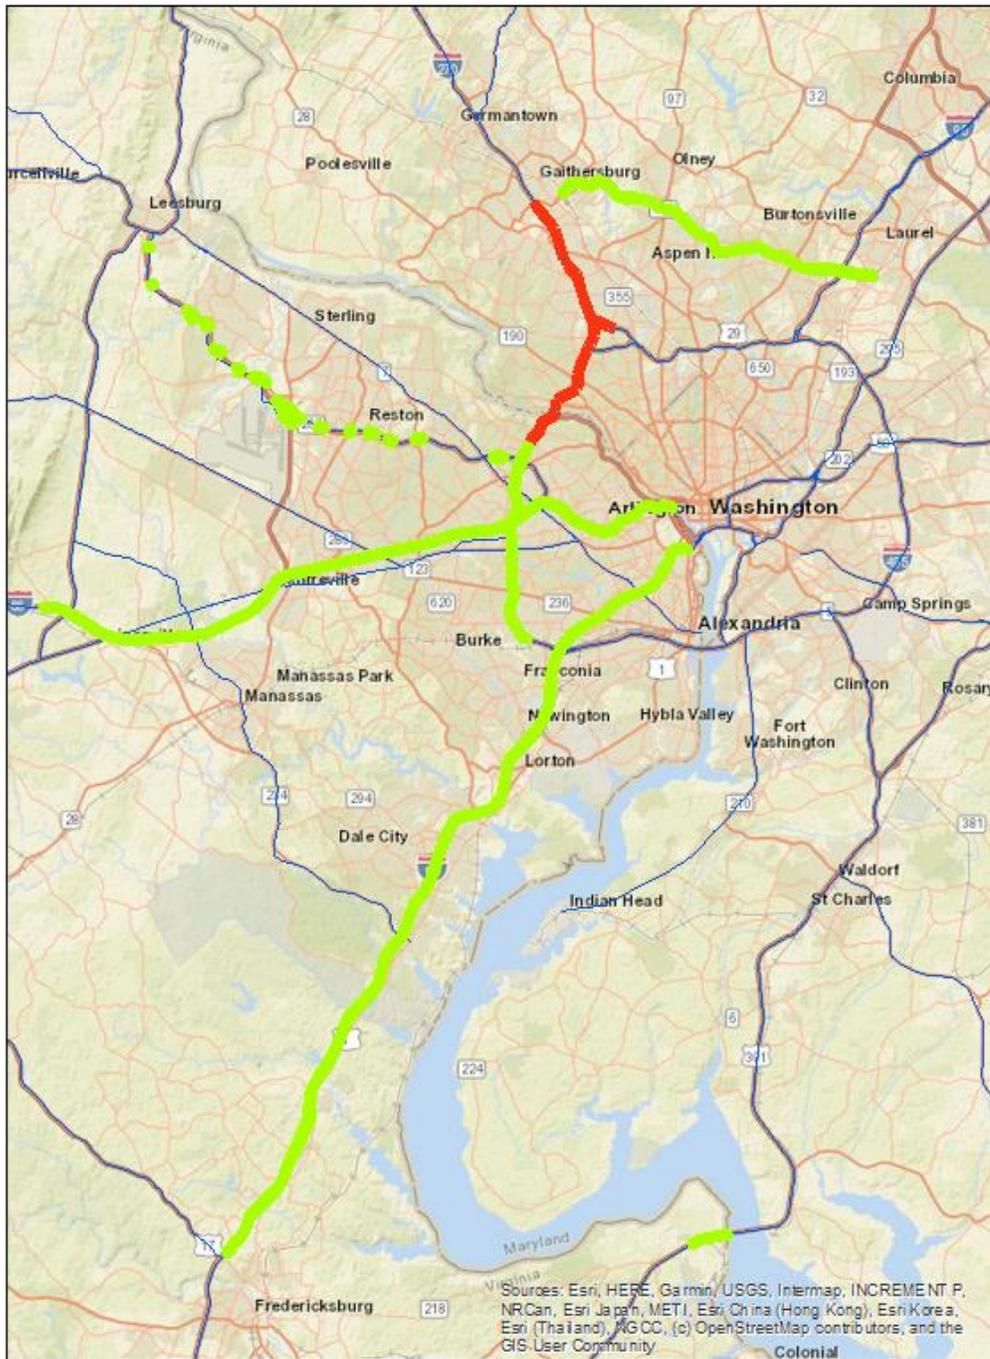

Ref: "I:\ateam\docum\fy25\ Visualize2050\_Network\_Report \Toll\_Facilities\_Viz2050\_Gen2.emf"

Table 3-9 Toll parameter file (Toll\_esc.dbf)

Variable Name	Description
Tollgrp	Toll group code, 1=existing fixed-toll facility, 2=ICC, 3+= VA/MD HOT or other toll lane
Escfac	Deflation factor override
Dstfac	Distance (per mile)-based toll factor in current-year cents/dollar (optional)
AM_Tftr	AM period Toll factor (no units)
PM_Tftr	PM period toll factor (no units)
OP_Tftr	Off-peak period toll factor (no units)
AT_Min	Area Type minimum override (optional)
AT_Max	Area Type maximum override (optional)
TollType	<i>Toll Type (1 = operating in calibration year, 2 = operating after calibration year)</i>


I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables\Lst\_of NW\_Fare\_Files.xlsx"

The file contains a base distance-based toll factor (DSTFAC), in cents/mile, and time-period-specific variables (e.g., AM\_TFTR and PM\_TFTR) that allow one to transform distance-based factors to time-period-specific toll rates. Except for the case where TOLLGRP = 1, the TOLL and TOLLGRP factors should not be invoked together. If the TOLL value of a given link is non-zero and the TOLLGRP value equals zero, the highway network building process automatically imposes a TOLLGRP override value of "1". TOLLGRP codes that are used should therefore be greater than "1."

The highway building process ultimately creates six period-specific toll attributes: AMTOLL, PMTOLL, OPTOLL (tolls by time-of-day on all toll facilities) and AMTOLL\_VP, PMTOLL\_VP, OPTOLL\_VP (tolls by time-of-day on variable priced facilities only).

Figure 3-9 shows tolling locations on the Dulles Toll Road.

Figure 3-9 Dulles Toll Road: Toll facilities locations

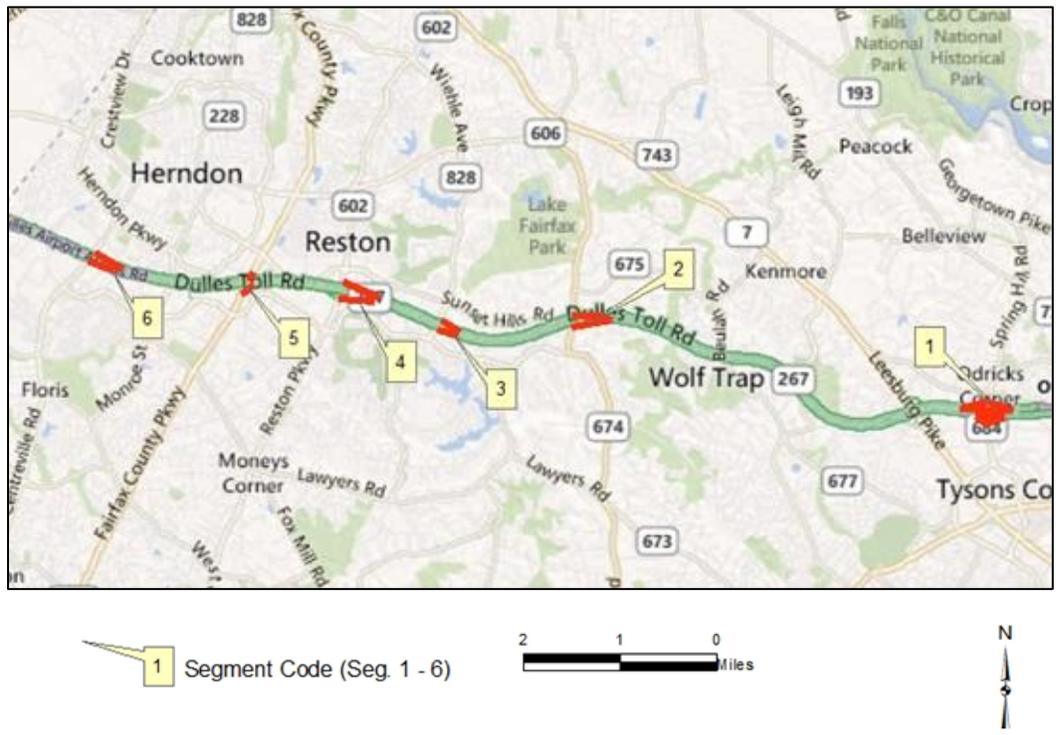

The Visualize 2050 Plan forecast-year networks reflects year-2024 toll values, as shown in Table 3-10 Dulles Toll Road (VA 267): Toll links. The nominal toll rate is fixed at the year-2024 value through 2050, which implies that real tolls (prices) are dropping from 2024 to 2050. In the model, all prices are converted to a common year (2018, the calibration year) and then grown to the modeled year being analyzed. Thus, a year-2024 toll would first be brought to year-2018 prices, then would be grown to the appropriate year being modeled (e.g., 2030). This deflation step is done using the CPI data in CPI\_File.txt. As can be seen in Figure 3-1 on p. 28 the deflation year goes only to 2023. That is because, when the CPI file was being developed, data for the entirety of 2024 was not yet available. Thus, when year-2024 tolls are deflated, they are deflated using the year-2023 deflation value (0.8241).

Table 3-10 Dulles Toll Road (VA 267): Toll links


Segment	A	B	Location	Direction	Toll Values (in 2024 cents)
					2024
1	35130	35133	Main Toll Plaza-Rt 684 Interchange (LOV)	Inbound	400
	35136	35129	Main Toll Plaza-Rt 684 Interchange (LOV)	Outbound	400
	35430	36657	Greensboro Dr at Tyco Rd	Inbound	200
	36657	35129	Greensboro Dr at Tyco Rd	Outbound	200
	35130	35132	Spring Hill Road- Off Ramp	Inbound	200
	35132	35133	Spring Hill Road- On Ramp	Inbound	200
	35136	35131	Spring Hill Road- Off Ramp	Outbound	200
	35131	35129	Spring Hill Road- On Ramp	Outbound	200
2	35097	35096	Rt 674 (Hunter Mill Road) - On Ramp	Inbound	200
	35194	35095	Rt 674 (Hunter Mill Road) - Off Ramp	Outbound	200
3	35101	35100	Rt 828 (Wiehle Avenue)- On Ramp	Inbound	200
	35196	35099	Rt 828 (Wiehle Avenue)- Off Ramp	Outbound	200
4	35105	35104	Rt 602 (Reston Pkwy)-On Ramp	Inbound	200
	35198	35103	Rt 602 (Reston Pkwy)-Off Ramp	Outbound	200
5	35287	35291	Rt 7100 (Fairfax Co. Pkwy)- On Ramp	Inbound	200
	35289	35286	Rt 7100 (Fairfax Co. Pkwy)- Off Ramp	Outbound	200
6	35109	35108	Rt 228 (Centreville Road) -On Ramp	Inbound	200
	35200	35107	Rt 228 (Centreville Road) -Off Ramp	Outbound	200

Note: Toll rates current to summer, 2024. Year 2024 toll values are used for all forecast years.

Ref: " I:\ateam\docum\fy25\Gen3\_Network\_Report\_Vizualize2050\Report\_Tables\Grnway\_Dulles\_Viz2050\_Gen2.xlsx Tab-Dulls\_Toll\_Rd

The 14-mile Dulles Greenway connects to the Dulles Toll Road at Route 28 (at Dulles International Airport), and extends west to Route 15 at Leesburg, as shown in Figure 3-10 and Figure 3-11. Dulles Greenway tolls (shown in Table 3-11, for segments 1-4, and, Table 3-12, for segments 5-8) are coded in highway networks **based on a weighted average of the cash rates/E-ZPass rates, and congestion-management tolling**. Survey data indicate that the E-ZPass markets account for roughly three-fourths of users and that about half the travel occurs during the times when the congestion-management tolls are in effect. The main toll facility is represented west of Route 28 (Sully Road) interchange with a weighted toll of \$7.53 in 2024 and beyond. A weighted toll of \$5.53 in 2024 and beyond is used for all westbound and eastbound on-ramps at Routes 28, 606, and 607. A weighted toll of \$4.83 in 2024 and beyond is coded for all westbound and eastbound on-ramps at Routes 772, Claiborne Parkway, and Belmont Ridge Road. A weighted toll of \$4.10 in 2024 and beyond is coded for all on-ramps at Route 653/Shreve Mill Road. No toll is charged at the future Battlefield Parkway interchange.

Figure 3-10 Dulles Greenway: Toll facilities locations (Map 1 of 2)

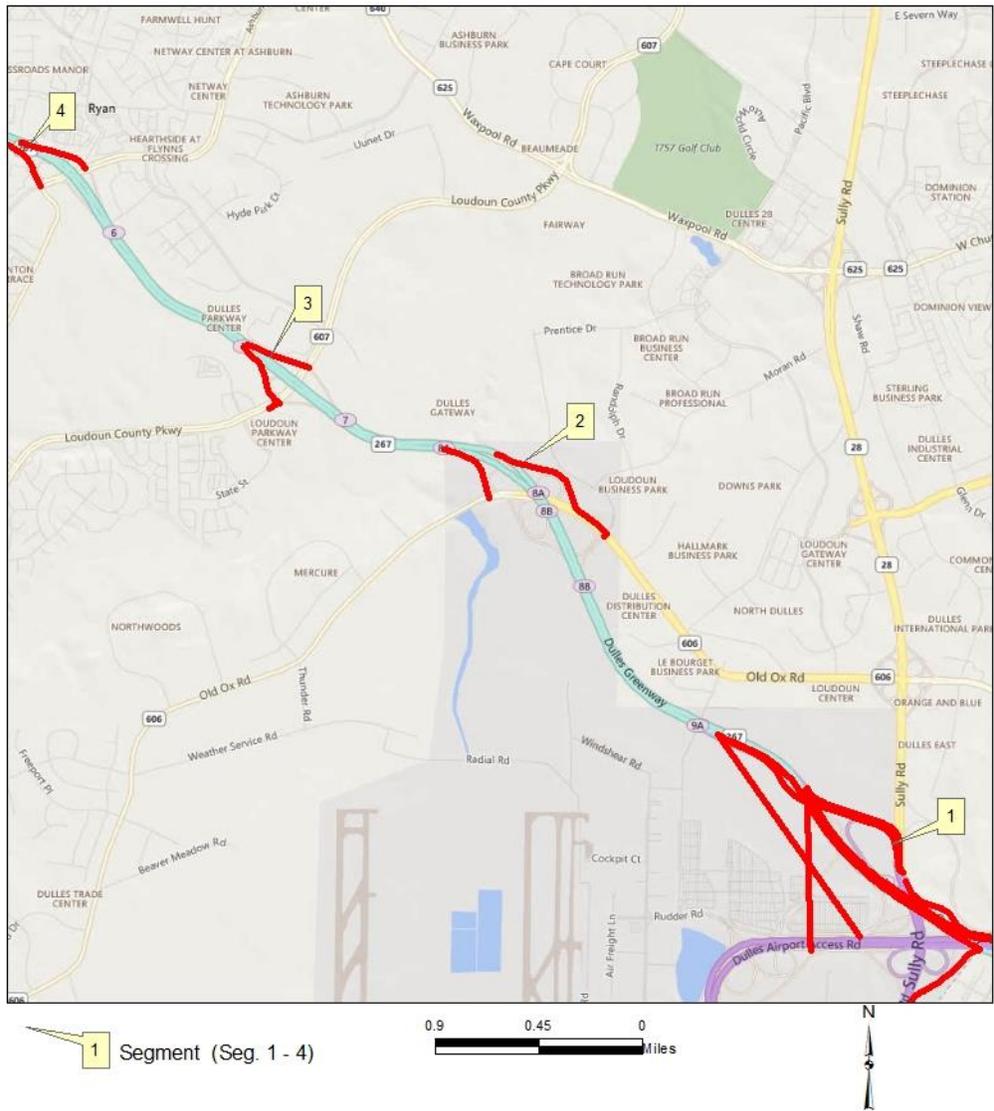

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-11 Dulles Greenway Toll Inks (Segments 1-4)

Seg	Anode	Bnode	Location	Direction	Toll Values (in 2024 cents)	
					2024	
1	38046	38098	Rt. 28	Outbound	753	
	38266	34810	Rt. 28	Inbound	753	
	38025	34810	Rt. 28 Toll Plaza on- Ramp	Inbound	200	
	38046	38018	Rt. 28 Toll Plaza off- Ramp	Outbound	200	
	38064	38098	Rt. 28 to Dulles Greenway on-Ramp	Outbound	553	
	38266	38064	Dulles Greenway to Rt. 28 off-Ramp	Inbound	553	
	38043	38098	Airport Access road to Dulles Greenway on- Ramp	Outbound	553	
	38266	38047	Dulles Greenway to Airport Access road off Ramp	Inbound	553	
	2	38029	38271	Rt 606 (Old Ox Road) on-Ramp	Outbound	553
		38272	38273	Rt 606 (Old Ox Road) off-Ramp	Inbound	553
3	38100	38276	Rt 607 (Loudoun Co. Pkwy) on-Ramp	Outbound	553	
	38277	38278	Rt 607 (Loudoun Co. Pkwy) off-Ramp	Inbound	553	
4	38065	38281	Rt 772 (Old Ryan Rd) on-Ramp	Outbound	483	
	38282	38283	Rt 772 (Old Ryan Rd) off-Ramp	Inbound	483	

Ref: " I:\ateam\docum\fy25\Gen3\_Network\_Report\_Vizualize2050\Report\_Tables\Grnway\_Dulles\_Viz2050\_Gen2.xlsx Tab-Grnway"

Figure 3-11 Dulles Greenway: Toll facilities locations (Map 2 of 2)

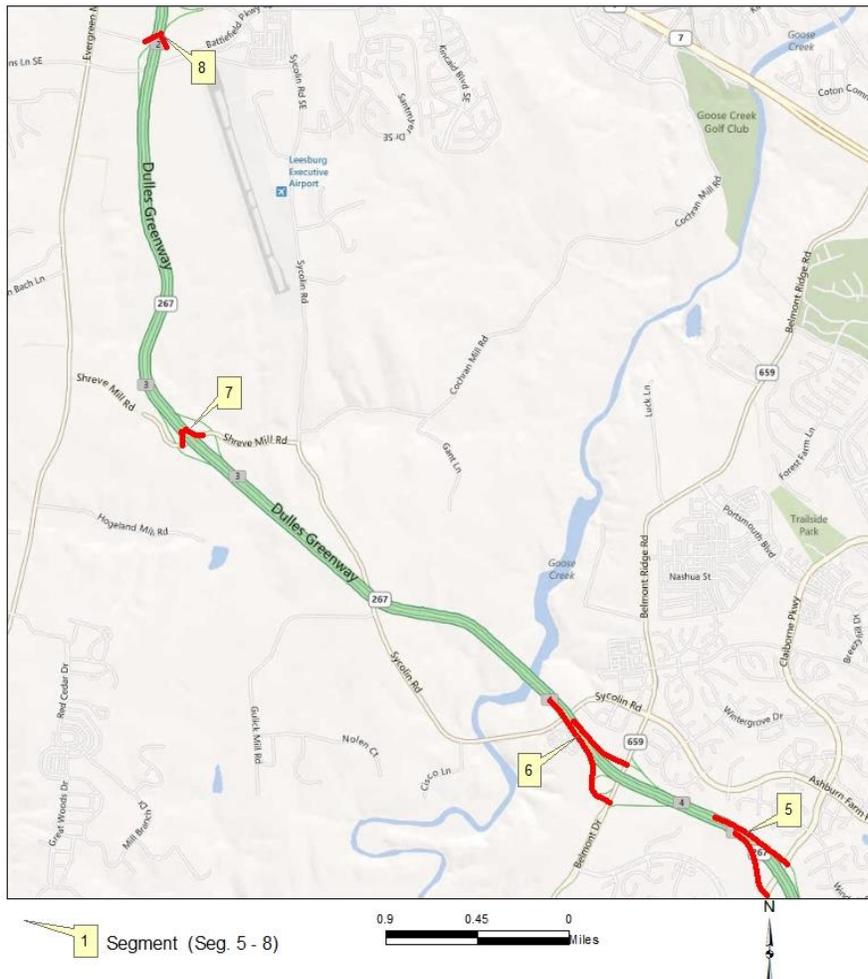


Table 3-12 Dulles Greenway Toll inks (Segments 5-8)

Seg	Anode	Bnode	Location	Direction	Toll Values (in 2024 cents)	
					2024	
5	38069	38289	Claiborn Pkwy on-Ramp	Outbound		483
	38290	38291	Claiborn Pkwy off-Ramp	Inbound		483
6	38070	38294	Belmont Ridge Road on-Ramp	Outbound		483
	38295	38296	Belmont Ridge Road off-Ramp	Inbound		483
7	38071	38299	VA 653 Shreve Mill Road on-Ramp	Outbound		410
	38300	38301	VA 653 Shreve Mill Road on-Ramp	Inbound		410
8	38072	38304	Battlefield Pkwy on-Ramp	Outbound		na
	38305	38306	Battlefield Pkwy off-Ramp	Inbound		na

Note: Toll rates current to summer, 2024. Year 2024 toll values are used for all forecast years.

Ref: " I:\ateam\docum\fy25\Gen3\_Network\_Report\_Vizualize2050\Report\_Tables\Grnway\_Dulles\_Viz2050\_Gen2.xlsx Tab-Grnway"

Table 3-13 shows that a weighted (E-ZPass vs. cash) toll of \$2.41 is coded on the Harry W. Nice Bridge, in both directions, on the forecast-year network links.

Table 3-13 Harry W. Nice Bridge toll links

A	B	Location	Direction	Toll Values (in 2024 cents)
				2024
50002	50001	Virginia - Maryland	Inbound	241
50001	50002	Maryland - Virginia	Outbound	241
<b>Note: Toll rates current to summer, 2024. Year 2024 toll values are used for all forecast years.</b>				

Ref: " I:\ateam\docum\fy25\Gen3\_Network\_Report\_Vizualize2050\Report\_Tables\Grnway\_Dulles\_Viz2050\_Gen2.xlsx Tab-Dulls\_Toll\_Rd"

Starting in 2012, the Intercounty Connector (ICC) in Maryland was included in all networks representing the year 2012 and beyond. The toll rates used in the Visualize 2045 plan for the ICC are effective as of July 2015.<sup>17</sup> HOT lane operations on I-95/I-395 between the 14<sup>th</sup> Street Bridge and VA 610 (Garrisonville Road) in Stafford County are included in all networks representing 2019 and beyond. The Visualize 2050 includes the expansion of the I-95/I-395 HOT lanes to VA 17 (Warrenton Rd- exit 133) to the south in all networks representing 2022 and beyond. The I-395 HOV lanes from Turkeycock Run to just south of the 14<sup>th</sup> Street Bridge converted to HOT in 2019. HOV/HOT lanes on I-95 between VA 610 and VA 17 in Spotsylvania County are in all networks representing 2025 and beyond. On I-495 (Capital Beltway) in Virginia HOT lane operations are included as follows:

- Beginning in 2013: From Hemming Avenue to south of Old Dominion Drive;
- Beginning in 2025: From south of Old Dominion Drive to the George Washington Parkway;
- Beginning in 2025: From the George Washington Parkway to the American Legion Bridge.

The HOV lanes on I-66 inside the Beltway converted to HOT lanes in 2017. HOT lanes on I-66 outside the Beltway to University Boulevard are included in all networks starting in 2022, and from University Boulevard to 1.2 miles west of US 15 in 2040.

As discussed earlier in this chapter, in the COG/TPB highway networks, the toll group variable (TOLLGRP) indicates the type of tolling on the facility. TOLLGRP code 1 is assigned for existing fixed-rate tolled facilities (Dulles Toll Road, Dulles Greenway, and the Harry W. Nice Bridge). The ICC in Maryland is modeled as TOLLGRP code 2 with fixed toll values of 22 cents/mile during peak periods and 17 cents/mile during off-peak periods (in 2024 cents). For all other tolled facilities, the TOLLGRP code varies and is used to develop variably priced tolls.

For the variably-priced ETL and HOT-lane facilities, the links in each segment of I-270, the Beltway in Virginia, I-95/I-395, and I-66 are coded with a unique TOLLGRP variable. The network link toll value

<sup>17</sup> Jane Posey to Files, "Visualize 2045 Toll Rates," Memorandum, January 10, 2019.

(TOLL) is left blank, and the toll facility type variable (TOLLGRP) is used to access lookup tables of fixed fees and per-mile rates. The tolls vary based on the level of congestion.

**Note about coding the number of lanes on HOV and HOT-lane facilities:** On some roads, such as HOV and HOT-lane facilities, the number of lanes available for use varies by the time of day. Unfortunately, there is a mismatch between the four time-of-day periods used in the traffic assignment and the times of day when operational changes occur to these facilities. Thus, when TPB staff is coding such facilities, it is necessary to make simplifying assumptions. Thus, for years or segments where a facility such as I-395 is 2 lanes, TPB staff codes 1 lane northbound and 1 lane southbound during the off-peak periods to best replicate the capacity of the facility. Similarly, for model years or segments where the facility is 3 lanes, TPB staff codes 2 lanes northbound and 2 lanes southbound. Although this is not precise, it is a compromise that must be made, and should be reasonable for regional modeling purposes, due to the mismatch between the four time-of-day periods used in the traffic assignment and the times of day when operational changes occur to these facilities.

### **3.2.6 Highway Network Screenlines**

The network includes an attribute (SCREEN) that identifies 36 screenlines/cutlines, which are used for model summary or validation purposes.<sup>18</sup> The screenline locations are shown in Figure 3-12 and Figure 3-13.

---

<sup>18</sup> The “screen” variable includes codes from 1 to 38, but the numbers 21 and 30 are unused.

Figure 3-12 Highway Network screenlines: Inside the Beltway


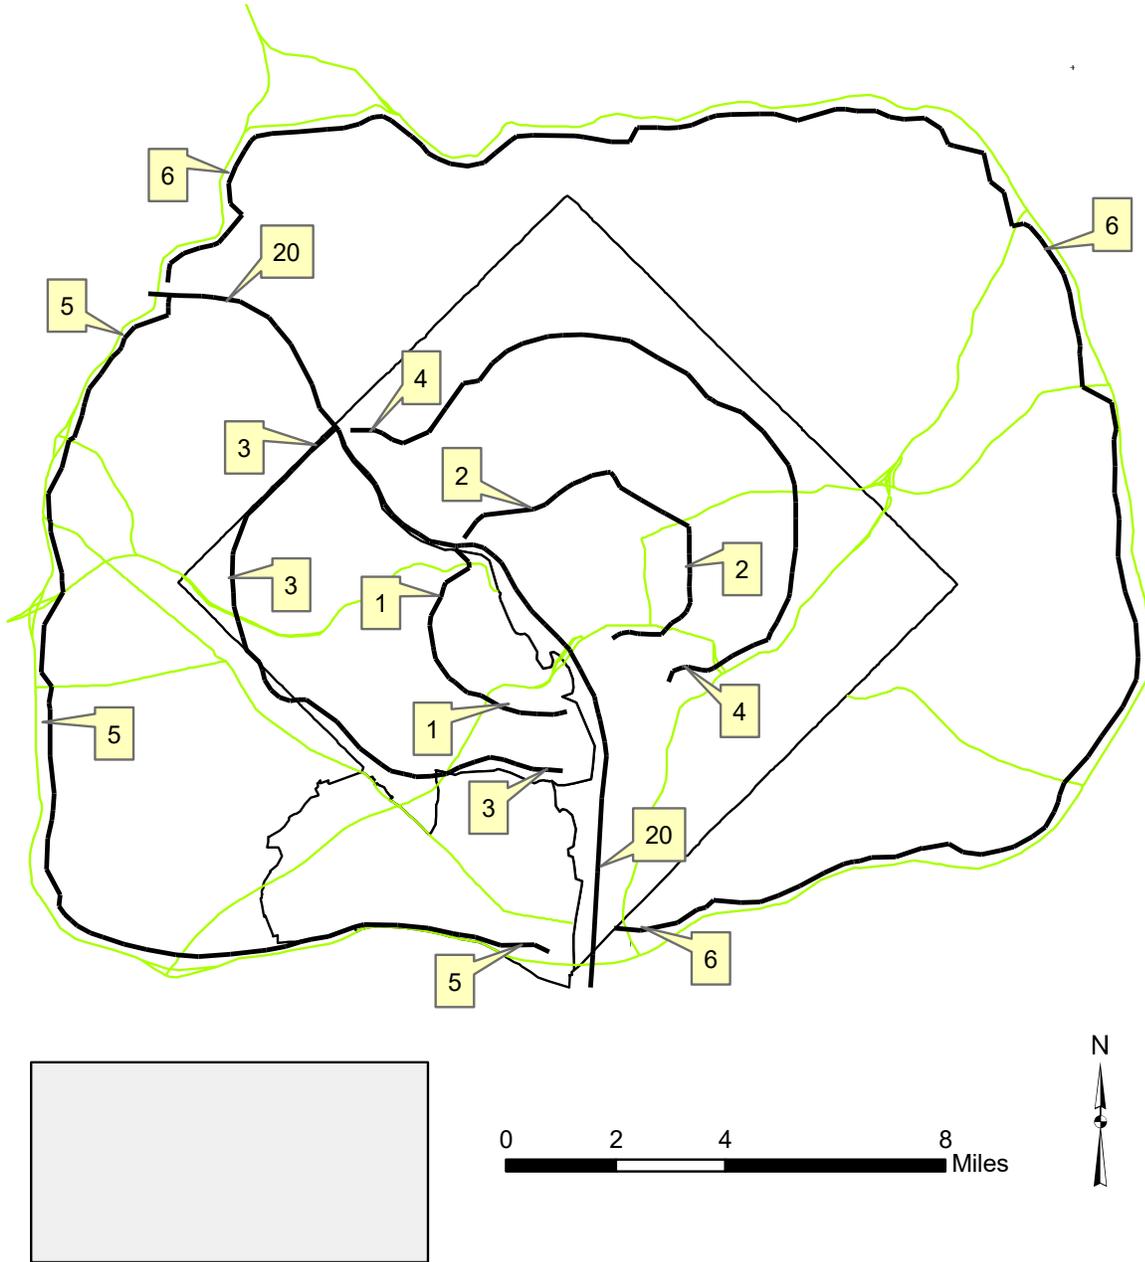


Figure 3-13 Highway network screenlines: Outside the Beltway

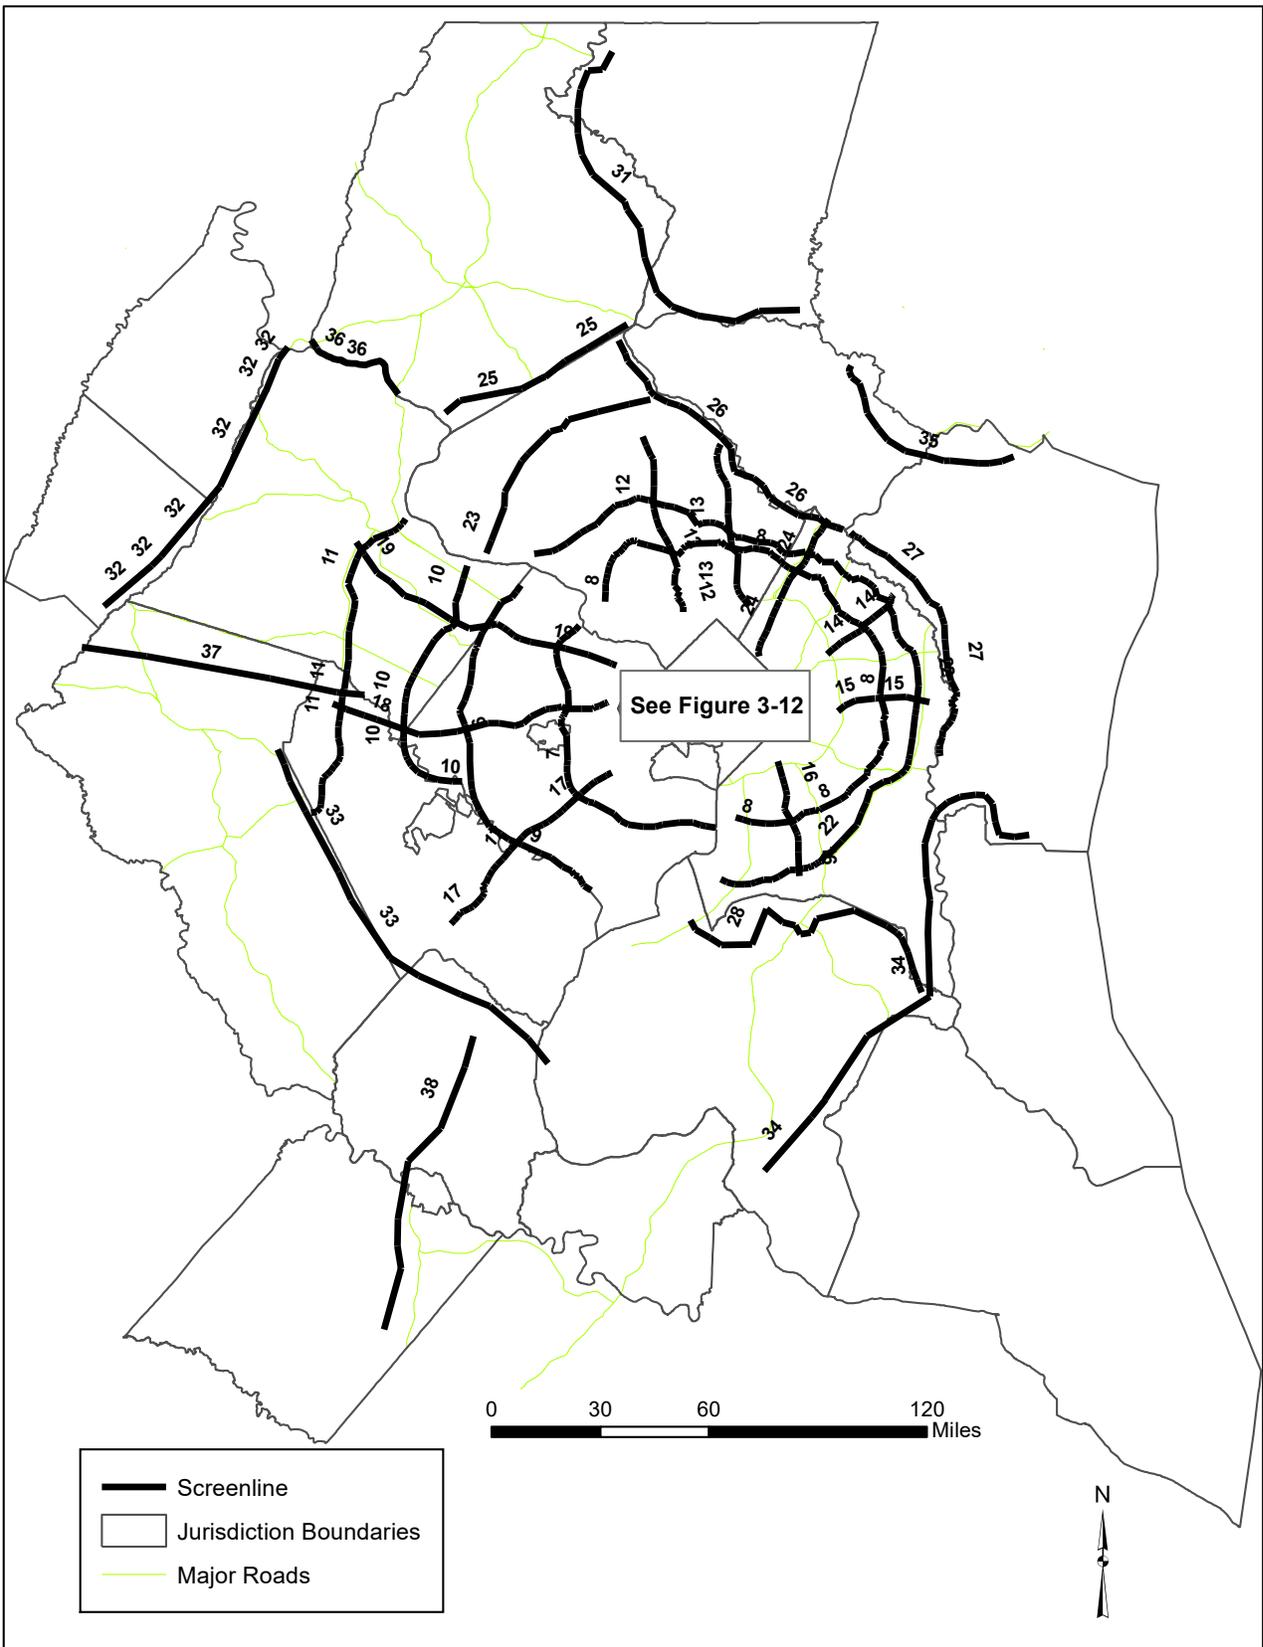

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Screenline\_Map\_Rev\_March9\_2022.emf

### 3.2.7 Highway Statistics from Visualize 2050

A summary of directional lane miles for the AM peak period is shown in Table 3-10.<sup>19</sup> In the 2025 highway network, there were over 23,000 AM lane miles. By 2050, this number is predicted to increase by at least 700, which is 3%, regionally. Fairfax Co. and Prince William Co. are predicted to have the largest increase in AM lane miles from 2025 to 2050 – 187 and 157 miles, respectively – though this is not surprising since these counties are the largest jurisdictions in the region, in terms of lane miles. The District of Columbia is the only jurisdiction that is predicted to have decline in the AM lane miles from 2025 to 2050, but the decrease is very small (much less than 1 percent).

---

<sup>19</sup> Computation of AM lane miles **excludes** TAZ centroid connectors (FTYPE=0) and transit-only links (AMLIMIT=9) in the highway network.

Table 3-10 AM lane-miles for the Visualize 2050 highway networks by Jurisdiction

Jurisdiction Code	Jurisdiction	2025	2026	2030	2040	2045	2050	Diff 2050-2025	Ratio 2050/2025
0	District of Columbia	1,293	1,284	1,267	1,266	1,266	1,266	-27	0.98
1	Montgomery Co., Md.	2,677	2,678	2,682	2,709	2,733	2,733	56	1.02
2	Prince Georges Co., Md.	3,028	3,028	3,028	3,050	3,050	3,050	22	1.01
3	Arlington Co., Va.	523	523	523	523	523	523	0	1.00
4	City of Alexandria, Va.	304	304	304	304	304	304	0	1.00
5	Fairfax Co., Va.	3,460	3,472	3,523	3,582	3,647	3,647	187	1.05
6	Loudoun Co., Va.	1,746	1,752	1,811	1,825	1,825	1,825	79	1.04
7	Prince William Co., Va.	1,537	1,537	1,574	1,677	1,694	1,694	157	1.10
9	Frederick Co., Md.	1,701	1,701	1,707	1,726	1,726	1,726	25	1.01
10	Howard Co., Md.	985	985	990	997	1,029	1,029	43	1.04
11	Anne Arundel Co., Md.	1,419	1,421	1,423	1,427	1,495	1,495	76	1.05
12	Charles Co., Md.	859	859	859	859	859	859	0	1.00
14	Carroll Co., Md.	576	576	581	593	593	593	17	1.03
15	Calvert Co., Md	367	367	367	367	374	374	7	1.02
16	St. Mary's Co., Md.	455	455	455	461	461	461	6	1.01
17	King George Co., Va.	254	254	254	254	254	254	0	1.00
18	City of Fredericksburg, Va.	98	98	100	107	109	109	11	1.11
19	Stafford Co., Va.	627	627	627	639	643	643	16	1.03
20	Spotsylvania Co., Va.	445	445	445	463	467	467	22	1.05
21	Fauquier Co., Va.	795	795	795	795	795	795	0	1.00
22	Clark Co., Va.	161	161	161	161	161	161	0	1.00
23	Jefferson Co., WV.	278	278	278	278	278	278	0	1.00
		<b>23,589</b>	<b>23,600</b>	<b>23,752</b>	<b>24,062</b>	<b>24,285</b>	<b>24,285</b>	<b>696</b>	<b>1.03</b>

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\AM\_Lane\_Miles\_Jur\_FTpe.xlsx"

**Note:** TAZ connectors (FTYPE=0) and transit-only links (AMLIMIT=9) are **excluded**.

*Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)*

---

A summary of directional lane miles for the AM peak period by facility type is shown in Table 3-11. Major and Minor Arterials are predicted to have the largest increases in AM lane miles from 2025 to 2050 – 214 and 134 miles, respectively.

**Table 3-11 AM lane-miles for the Visualize 2050 highway networks by Facility Type**

<b>Facility Type</b>								<b>Diff</b>	<b>Ratio</b>
<b>Code</b>	<b>Facility type</b>	<b>2025</b>	<b>2026</b>	<b>2030</b>	<b>2040</b>	<b>2045</b>	<b>2050</b>	<b>2050-2025</b>	<b>2050/2025</b>
1	Freeways	3,887	3,896	3,918	3,990	4,013	4,013	126	1.03
2	Major arterials	5,209	5,202	5,246	5,322	5,423	5,423	214	1.04
3	Minor arterials	7,407	7,410	7,424	7,485	7,541	7,541	134	1.02
4	Collectors	5,714	5,719	5,765	5,816	5,830	5,830	116	1.02
5	Expressways	983	983	1,009	1,058	1,085	1,085	102	1.10
6	Ramps	390	390	390	392	394	394	4	1.01
		<b>23,589</b>	<b>23,600</b>	<b>23,752</b>	<b>24,062</b>	<b>24,285</b>	<b>24,285</b>	<b>696</b>	<b>1.03</b>

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\AM\_Lane\_Miles\_Jur\_FTpe.xlsx"

### 3.3 Transit Network Files

The transit network consists of transportation infrastructure, represented via nodes and links, plus the transit service that runs over that infrastructure. The transportation infrastructure includes the highway network, which is used by buses, and transit-only infrastructure, such as transit stations and rail links. The input files used to construct the transit networks are listed in Table 3-12.

Table 3-12 Listing of transit network input files

Filename	Description	Type	Source
Station.dbf	Station file: Metrorail, Comm.Rail, LRT stations/PNR lots & bus PNR lots	DBF	Geodatabase
AreaWalk.txt	Used to calculate zonal percent walk to transit values	Text	Travel Model-generated
met_node.tb	Metrorail stations	Text	Geodatabase
com_node.tb	Commuter rail stations	Text	Geodatabase
lrt_node.tb	LRT stations/stops	Text	Geodatabase
new_node.tb	BRT/streetcar stations/stops	Text	Geodatabase
met_pnm.tb	Metrorail PNR lots	Text	Geodatabase
com_pnm.tb	Commuter rail PNR lots	Text	Geodatabase
bus_pnm.tb	Bus PNR lots	Text	Geodatabase
lrt_pnm.tb	LRT PNR lots	Text	Geodatabase
new_pnm.tb	BRT/streetcar PNR lots	Text	Geodatabase
met_link.tb	Metrorail links	Text	Geodatabase
com_link.tb	Commuter rail links	Text	Geodatabase
lrt_link.tb	LRT links	Text	Geodatabase
new_link.tb	BRT/streetcar links	Text	Geodatabase
met_bus.tb	Transfer link (walk) between Metrorail station and bus stop	Text	Geodatabase
com_bus.tb	Transfer link (walk) between commuter rail station and bus & LRT stop	Text	Geodatabase
lrt_bus.tb	Transfer link (walk) between LRT station and bus stop	Text	Geodatabase
new_bus.tb	Transfer link (walk) between BRT/streetcar stop and bus stop	Text	Geodatabase
MODE1AM...,MODE10AM.tb	AM transit line files	Text	Geodatabase
MODE1OP...,MODE10OP.tb	Off-peak transit line files	Text	Geodatabase

Ref: "I:\ateam\docum\FY15\2014LRTP\_Network\_Report\NW\_Report\_Tables\v23\_inputs.xlsx"

The input files are intended to serve as extensions to the highway network, which provides the infrastructure for bus and rail service. The table indicates that all the transit links, node and line/route elements, and station file are produced directly from the geodatabase, with one exception: the

AreaWalk.txt file which contains zonal walk-to-transit market areas. The Ver. 2.4.6 Travel Model includes an automated/integrated transit walkshed process. The process is run using a Python/ArcPy script and does not require manual intervention from the user. Before discussing the individual input files, the next section discusses transit and non-transit mode codes used in the transit network.

### 3.3.1 Transit and Non-Transit Mode Codes

The transit network consists of various types of transit services and transit vehicles. For example, a bus typically operates on a road in mixed traffic (i.e., with private vehicles, such as cars and trucks). But a bus can also operate as bus rapid transit (BRT), meaning that it may use a combination of normal roads (mixed traffic) and bus-only links/segments (separate right of way). Similarly, there are many rail transit modes that operate now, or will operate in the future, in the Washington, D.C. area, such as Metrorail, commuter rail, light rail transit (LRT) and streetcar. In terms of network coding, we currently differentiate the following six transit modes:

- Local bus (LB)
- Commuter/Express bus (CB)
- Metrorail (MR)
- Commuter rail (CR)
- Light rail transit (LRT)
- Bus rapid transit (BRT) and streetcar (SR)

The last mode, BRT and streetcar, is designated for transit service that travels on a *combination* of separate right of way (where the vehicles are not mixed with other traffic) and regular streets (where the vehicles are mixed with other traffic). By contrast, the LRT mode is designed to be used for transit service that travels *predominantly* on its own right of way (hence, it is not encumbered by other traffic). Historically, the coding practice by COG/TPB staff has been to distinguish three separate categories for both local and express bus service:

- Metrobus
- Non-Metrobus, inner jurisdictions (referred to as “other primary”)
- Non-Metrobus, outer jurisdictions (referred to as “other secondary”)

This results in the ten transit modes shown in Table 3-13.

Table 3-13 Transit mode codes

Mode Code	Mode Description
1	Local bus: Metrobus (also includes DC Circulator bus)
2	Express bus: Metrobus
3	Metrorail
4	Commuter rail
5	Light rail
6	Local bus: Other primary service (inner jurisdictions)
7	Express bus: Other primary service (inner jurisdictions)
8	Local bus: Other secondary service (outer jurisdictions)
9	Express bus: Other secondary service (outer jurisdictions)
10	BRT/streetcar

The transit path-builder, TRNBUILD, can combine average headways (frequencies) and run times (time from start to finish of the route), when two or more transit lines share the same link, via a technique known as “line combining.” The line combining can result in new, equivalent average headways and run time, but “TRNBUILD’s line-combining process combines only lines with the same mode.”<sup>20</sup>

There are currently about 28 transit agencies represented in the transit networks used by the TPB travel demand forecasting model, as shown in Table 3-14. For each transit agency, this table shows the agency abbreviations, the main services offered by each agency, and the modes of travel offered. So, for example, in terms of services, WMATA offers Metrorail, Metrobus, Metroway, and REX. In terms of modes, WMATA has heavy rail (HR), local bus (LB), express/commuter bus (CB), and Bus Rapid Transit (BRT: Metroway). The lists of services and modes are for both the current time and the future. So, for example, Fairfax Co. DOT is listed as offering BRT, because it is one of the future services that is modeled in the transit network (US 1 BRT). As noted below the table, if the transit agency is part of the National Transit Database (NTD), the 2023 annual ridership is shown in this table. However, it is not always clear which transit services are included in the NTD ridership totals. For example, in the case of WMATA, the NTD total includes Metrorail and Metrobus, but it is not clear to us if the NTD value includes Metroway and REX.

Table 3-15 provides an equivalency between transit modes and transit services.

<sup>20</sup> Citilabs, Inc., “Cube Voyager Reference Guide, Version 6.4.1” (Citilabs, Inc., September 30, 2015), 1004.

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-14 Transit agencies in the Washington, D.C. area (TPB modeled area)

Agency	Abbrev.	3-Letter Code	2-Letter Code	Services (Current and Future)	Modes (Current and Future)	City/County	State	Incl. in TPB Model?	Incl. in NTD Database?	2023 Annual Trips	5 digit NTD ID
1 Washington Metropolitan Area Transit Authority	WMATA	WMA	WM	Metrorail, Metrobus, Metroway, REX	HR, MB, CB, BRT	Multiple	Multiple	y	y	229,629,638	30030
2 District Department of Transportation	DDOT	DCT	DC	DC Circulator, DC Streetcar	MB, SR	Washington	DC	y	y	2,591,448	30112
3 Maryland Transit Administration	MTA	MTA	MT	MARC Commuter Rail, MTA bus, MTA Commuter, Lee Coaches, St. Mary's Transit System, Corridor Cities Transitway (CCT), Purple Line LRT	CR, MB, CB, BRT	Multiple	MD	y	y	4,565,272	30034
4 Amtrak	Amtrak	AMT	AM	Amtrak (operates some MARC commuter rail service)	CR	Multiple	Multiple	y	n		
5 Potomac and Rappahannock Transportation Commission	PRTC	PRT	PR	Virginia Railway Express (VRE), OmniRide, OmniLink	CR, CB, MB	Multiple	VA	y	y	1,576,743	30070
6 Northern Virginia Transportation Commission	NVTC	NVT	NV	Virginia Railway Express (VRE)	CR	Multiple	VA	y	y	1,466,250	30073
7 Montgomery Co. Dept. of Transportation, Div. of	MCDOT	MCT	MC	Ride-On	MB	Montgomery Co.	MD	y	y	14,359,817	30051
8 Fairfax Co. Dept. of Transportation	FFXDOT	FFX	FC	Fairfax Connector, US 1 BRT, Tysons Circulator	MB, BRT	Fairfax Co.	VA	y	y	8,365,190	30068
9 Prince George's Co.	PGCO	PGC	PG	TheBus	MB	Prince George's Co.	MD	y	y	1,762,469	30085
10 Arlington Co.	ART	ART	AR	Arlington Transit (ART)	MB	Arlington Co.	VA	y	y	2,049,102	30080
11 Alexandria Transit Company	ALEX	ALX	AL	DASH Bus	MB	Alexandria	VA	y	y	4,540,860	30071
12 City of Fairfax	CUE	CUE	CU	City. University. Everyone. (CUE) Bus	MB	City of Fairfax	VA	y	y	845,194	30058
13 Transit Services of Frederick County	TransIT	FRM	FM	Transit Services of Frederick County	MB	Frederick Co.	MD	y	y	641,014	30072
14 Loudoun County	LCTrans	LCT	LC	Loudoun Co. Commuter Bus (LC Transit)	CB, MB	Loudoun Co.	VA	y	y	511,845	30081
15 Annapolis Department of Transportation	ANDOT	ANN	AN	Annapolis Transit	MB	Annapolis	MD	y	y	303,385	30040
16 Howard Transit	HT	HOW	HT	Howard Transit	MB	Howard Co.	MD	y	n		
17 Columbia Transit System	COLUM	COL	CO		MB	Columbia	MD	y	n		
18 FREDericksburg Regional Transit (FRED)	FRED	FRD	FV	FRED	MB	Fredericksburg	VA	y	y	288,349	30079
19 Carroll Transit System	CARR	CAR	CA		MB	Carroll Co.	MD	y	y	23,661	30092
20 City of Winchester	WinTran	WNT	WN	WinTran	MB	Winchester	VA	y	y	168,083	30099
21 Martz Group	NCW	NCW	NC	National Coach Works of Virginia, MTA Commuter	CB	Multiple	Multiple	y	n		
22 Metropolitan Washington Airports Authority	MWAA	MWA	MW	Washington Flyer	SB	Multiple	VA	y	n		
23 Anne Arundel County	AAR	AAR	AA		MB	Anne Arundel Co.	MD	y	y	79,658	30129
24 Calvert County, Maryland	CALV	CAL	CL	Calvert Co. Bus	MB	Calvert Co.	MD	y	y	70,759	30131
25 Regional Transportation Agency of Central Maryland	RTA	RTM	RM	City of Laurel Bus	MB	Multiple	MD	y	y	712,722	30205
26 City of Bethesda	BethCirc	BEC	BC	Bethesda Circulator	MB	Bethesda	MD	y	n		
27 Transportation Association of Greater Springfield	TAGS	TAG	TG	TAGS (along with WMATA)	MB	Springfield	VA	y	n		
28 Charles Co.	CHAR	CHS	CH	Vango	MB	Charles Co.	MD	y	y	492,846	30088
<b>Modes</b>											
Rail modes: heavy rail (HR), commuter rail (CR), light rail (LRT), and streetcar (SR)											
Bus modes: local bus (MB), commuter/express bus (CB), Bus Rapid Transit (BRT), shuttle bus (SB)											

If the transit agency is part of the National Transit Database (NTD), the 2023 annual ridership is shown in this table. However, it is not always clear which transit services are included in the NTD ridership totals. For example, in the case of WMATA, the NTD total includes Metrorail and Metrobus, but it is not clear if it includes Metroway and REX.

Ref: "I:\ateam\docum\FY25\Visualize2050\_Network\_Report\Tables\DC\_Area\_Transit\_Agencies\_2023\_PGEditions.xlsx"

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-15 Equivalency between transit modes and transit service

Mode No.	Mode Description	Abbreviation/Prefix	Transit Service
1	Local Metrobus	"WM01 - 97, A - Z"	WMATA (DC, Alex., Falls Church, & MTG, PG, ARL, FFX Counties)
		"DC"	District of Columbia Circulator
2	Express Metrobus	"WM05 - 29"	WMATA (ARL, ALEX, FFX)
		"REX"	WMATA (FFX. Co.)
3	Metrorail	"WMRED"	RED Line
		"WMBLU"	BLUE Line
		"WMGRN"	GREEN Line
		"WMORN"	ORANGE Line
		"WMYEL"	YELLOW Line
		"WMSILV"	SILVER Line
4	Commuter Rail	"VFRED"	Frederick Line (VRE)
		"VMAS"	Manassas Line (VRE)
		"MBR"	Brunswick Line (MARC)
		"MCAM"	Camden Line (MARC)
		"MP"	Penn Line (MARC)
		"MFRED"	Frederick City Line (MARC)
		"AMTK"	Amtrak Service
5	Light Rail	"PURPLE"	Purple Line -MTA (Bethesda -New Carrollton)
6	Other Primary - Local Bus	"ART"	Arlington County Bus (ART)
		"DAT"	City of Alexandria Bus (DASH)
		"F"	Fairfax County Bus
		"GO"	Prince Georges County Bus (TheBus)
		"RO"	Montgomery Co. Ride-On Bus
		"SG"	Fairfax City Bus (CUE)
		"TYSL"	Tyson's Circulator
7	Other Primary - Express Bus	"DAT"	City of Alexandria Bus (DASH)
		"F"	Fairfax County Bus
8	Other Secondary - Local Bus	"ANN"	City Of Annapolis Bus
		"CCATS"	Carroll County Bus
		"CC"	Calvert County Bus
		"FT"	Frederick County Bus
		"HT"	Howard County Bus
		"L"	City of Laurel Bus
		"LT"	Loudoun County Local Bus
		"OL"	OMNI-LINK (PrinceWilliam Co. Local)
		"VF"	Fredericksburg, Va (VRE Bus)
		"VG"	Charles County Bus (VanGO)
"ST"	St Mary's County Bus		
9	Other Secondary - Express Bus	"LC"	Lee Coaches Commuter Bus
		"LCS"	Loudoun Co. Commuter Bus
		"LINK"	Washington Flyer- Dulles/WFC (MWA)
		"MT"	Maryland MTA Bus (Frederick, Howard, Anne Arundel, Calvert, St Mary's, & Charles counties)
		"OR"	OMNI-RIDE (Prince William Co. Commuter Bus)
		"PQ"	Quicks Commuter Bus (Fredericksburg, Spotsylvania & Stafford Counties)
		"SDC"	Nat'l Coach/Martz Bus (Fredericksburg, Spotsylvania & Stafford Co's)
10	BRT/ Streetcar	"MWAY"	US 1 (Alexandria, Arlington) Metroway BRT
		"DCST"	DC Streetcar
		"US1BRT"	US 1 (Fairfax) BRT
		"CCTBRT"	Corridor Cities Transit Way
		"VIERSBRT"	Between Rockville Metrorail and Wheaton Metro Station
		"29BRT"	Silver Spring Transit Center to Burtonsville
		"355BRT"	Between Clarksburg Outlets and Rockville Metro
		"NHBRT"	New Hampshire Ave- Colesville PNR-Takoma Metro
		"NBETHBRT"	North Bethesda Transitway
		"RANDBRT"	Randolph Road BRT

Ref: "I:\ateam\docum\fy19\2.3.75\_Visualize2045NetworkReport\Report Tables\Transit\_NetWrk\_Mode\_Codes.xlsx"

According to the rules of TRNBUILD, a transit path includes both transit and non-transit links. The transit links would include any movement on a transit vehicle, and these transit links would be categorized by the 10 transit modes previously mentioned. The non-transit links in a transit path are associated with accessing the transit service, transferring between transit services (especially those represented by different mode codes), and egressing from the transit service. In TRNBUILD vernacular, non-transit links are also called “support” links. Transit path-building and assignment are conducted in production/attraction format, so a transit path goes from a production zone to an attraction zone. At the production end of a transit trip, it is assumed that one will access the transit service via one of two modes: walking or driving. Walking includes biking. At the attraction end of a transit trip, it is assumed that there is only one egress mode: walking. This assumes that people do not egress from the transit system via car. Again, biking is considered part of walking. Also, transfers need to be made, such as from a rail station to a bus stop, and from a park-and-ride (PNR) lot to the associated transit stop. The five current mode codes used for these “non-transit” links are shown in Table 3-16.

Table 3-16 Non-transit mode codes used in TRNBUILD

Mode Code	Mode Description
11	Drive-access to transit
12	Transfer link between rail (including BRT) and rail/non-rail transit (walk)
13	Sidewalk link (walk)
14	(Unused)
15	Transfer link between park-and-ride (PNR) lot and transit stop (walk)
16	Walk access to/egress from transit

### 3.3.2 Rail Station File

The “station file” (station.dbf) contains information about Metrorail stations, commuter rail stations, light rail stations, bus rapid transit stations/stops, streetcar stations/stops, express-bus bus stops, and park-and-ride (PNR) lots that serve these stations/stops. The variables included in the station file are shown in Table 3-17.

As mentioned in the previous section, there are 10 transit mode codes and five non-transit mode codes. The station file uses its own “mode code,” which is a letter, instead of a number, as shown in Table 3-13. The station file also includes an access distance code (“NCT”), which controls the number, extent, and directionality of PNR/KNR access links generated for each parking lot. The acceptable values for the access distance code are shown in Table 3-18.

Table 3-17 Variables in the transit station file (Station.dbf) (updated 10-22-21)

Name	Type	Field Description
SEQNO	N	Sequence Number
MM	C	Mode Code (M=Metrorail, C=Commuter rail, B=Bus, L=Light rail, N= BRT/streetcar)
NCT	N	Access distance code (1, 2, 3, 0, 9, 8)
STAPARK	C	Does the station have a park-and-ride lot? (Y=yes; blank=no)
STAUSE	C	Is the station in use for the given year? (Y=yes; blank=no)
SNAME	C	Station Name/PNR lot name
STAC	N	Station centroid number (5001-7999), also known as a park-and-ride (PNR) lot centroid or a dummy PNR centroid”
STAZ	N	For the purposes of path building, the TAZ (1-3722) that represents the location of the station PNR lot. Usually the closest TAZ to the PNR lot.
STAT	N	Station Node (8000-8999, 9000-9999, 10000-10999)
STAP	N	Station park-and-ride (PNR) node number (11000-13999)
STAN1	N	Station bus node #1 (used to generate a station-to-bus-node connector)
STAN2	N	Station bus node #2 (used to generate a station-to-bus-node connector)
STAN3	N	Station bus node #3 (used to generate a station-to-bus-node connector)
STAN4	N	Station bus node #4 (used to generate a station-to-bus-node connector)
STAPCAP	N	Parking capacity (number of spaces at the PNR lot)
STAX	N	X coordinate of station/PNR lot (MD State Plane, NAD83, feet)
STAY	N	Y coordinate of station/PNR lot (MD State Plane, NAD83, feet)
STAPKCOST	N	Peak period parking cost (daily cost, 2007 cents)
STAOPCOST	N	Off-peak parking cost (hourly cost, 2007 cents)
STAPKSHAD	N	Peak-period shadow price <b>(currently not used)</b>
STAOPSHAD	N	Off-peak-period shadow price <b>(currently not used)</b>
FIRSTYR	N	Year of Station/PNR lot Opening (unused by scripts, but used as metadata)
STA_CEND	N	Project ID (Metadata)
STWALKTM	N	Metrorail station escalator time (in minutes) <sup>21</sup> <b>(currently not used)</b>

Table 3-18 Transit access distance codes (NCT)

Access Dist. Code	Interpretation
1	End-of-the-line station (e.g., Shady Grove Metro)
2	Intermediate station (e.g., Rockville Metro)
3	PNR close to a CBD (e.g., Rhode Island Ave. Metro, Fort Totten)
0	Only KNR-access links generated (e.g., Braddock Road, National Airport, Clarendon)
9	Metrorail sta. in use, but no PNR/KNR access (e.g., Dupont Circle, Farragut North, Metro Ctr.)
8	Pentagon Metro Sta., allows for very long KNR links, to represent “slugging” (informal carpool)

<sup>21</sup> Ron Milone to Files, “Metrorail Escalator Time Estimation,” Memorandum, December 2, 2016.

Table 3-19 shows the designated ranges for station centroids and station nodes associated with Metrorail, commuter rail, LRT, and BRT/streetcar.

Table 3-19 Station centroid and station node range by mode

Mode	Mode Code	Station Centroid Range	Station Node Range
Metrorail (Mode 3)	M	5000-5999	8000-8999
Commuter rail (Mode 4)	C	6000-6999	9000-9999
Light rail transit (Mode 5)	L	Not used	10000-10499
Bus rapid transit/streetcar (Mode 10)	N	Not used	10500-10999
Bus (Modes 1, 2, 6-9)	B	Not used	Not used

### 3.3.3 Walk- and Drive-Access to Transit


As stated earlier, transit path-building and assignment are conducted in production/attraction format, so a transit path is constructed from a production zone to an attraction zone. At the production end of a transit trip, it is assumed that one will access the transit service via one of two modes: walking or driving. Walking includes biking. At the attraction end of a transit trip, it is assumed that there is only one egress mode: walking. This assumes that people do not egress from the transit system via car.

A series of Cube Voyager scripts are used as part of the transit network building process to enable automatic generation of transit access and transfer links, including zonal walk access links, PNR lot-to-rail station links, and auto access links (TAZ-to-station links). These are non-transit modes that are used to access transit and transfer between transit services and have transit mode codes of 11-16 as shown in Table 3-. Further details can be found in Chapter 21 of the Gen2/Version 2.4.6 model User’s Guide, which discusses the automatic generation of transit access, auto-access links, and walk-access links.

As shown in Figure 3-14, there are three Cube Voyager scripts that are used for developing access links:

- WALKACC.S: Used to develop zonal walk-access links
- AUTOACC5.S: Used to generate zonal drive-access links
- PARKER.S: Used to generate walk connections between PNR lots and rail stations

Figure 3-14 Process for developing walk-access and drive-access links

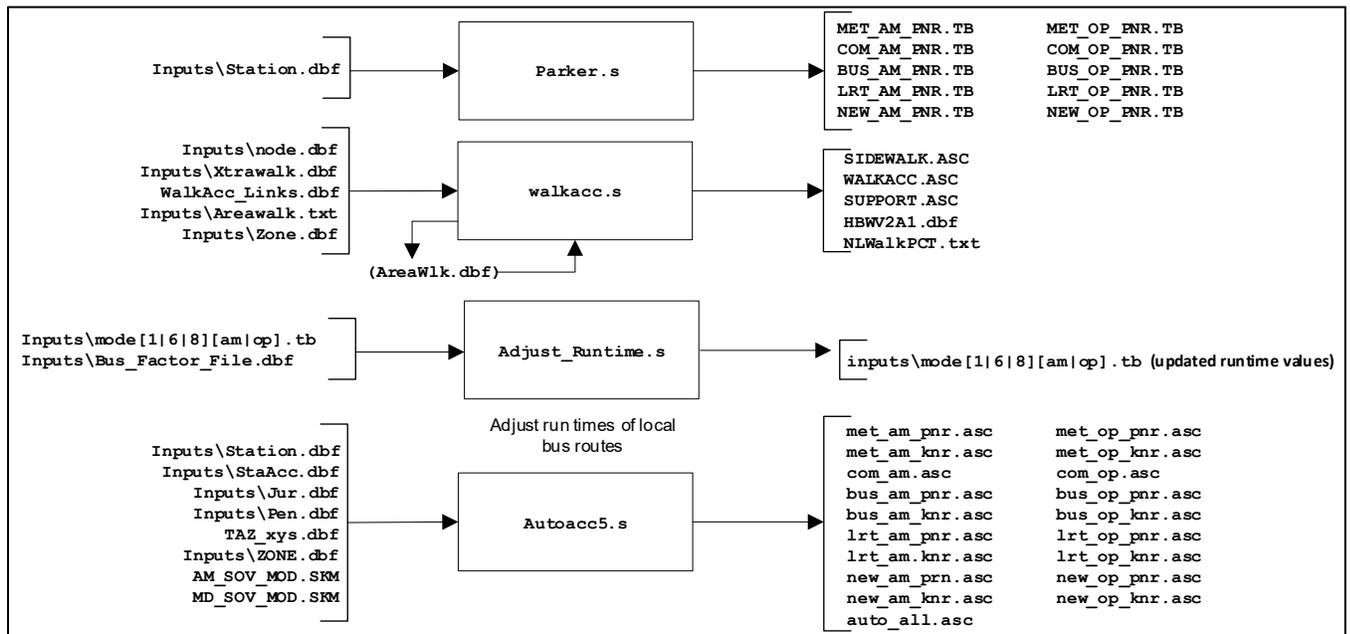

As noted in the Gen2/Version 2.4.6 Travel Model user’s guide, the automated approach for generating these links has greatly streamlined the transit network coding process. All three of these programs were originally developed as stand-alone Fortran programs developed by AECOM Consult. TPB staff converted these three Fortran programs to Cube Voyager scripts.

WALKACC.S requires the following input files:

- Node.dbf: A file with the X and Y coordinates of all the transit stop nodes
- Xtrawalk.dbf: A file with extra/user-specified walk links, which can be used in cases where the background highway network lacks sufficient detail to provide adequate walk access (it is assumed that one can walk on all highway links, except freeways, expressways, and ramps).
- WalkAcc\_Links.dbf: A list of highway links that can be used for generating walk-access links (developed by MODNET.S)
- Areawalk.txt: A file containing information needed to calculate the zonal percent-walk-to-transit (PWT) values. An excerpt from this file can be found in Figure 3-15. This file contains the following variables:
  - **TAZID**: TAZ number.
  - **TAZAREA**: Area of the TAZ in square miles.
  - **MTLRTSHR**: Area of the TAZ (sq. mi.) within a short (0.5 mile) walk of Metrorail or LRT service
  - **MTLRTLNG**: Area of the TAZ (sq. mi.) within a long (1.0 mile) walk of Metrorail or LRT service
  - **ALLPKSHR**: Area of the TAZ (sq. mi.) within a short (0.5 mile) walk of any transit service (including Metrorail and LRT) in the AM peak period

- **ALLPKLNG**: Area of the TAZ (sq. mi.) within a long (1 mile) walk of any transit service (including Metrorail and LRT) in the AM peak period
- **ALLOPSHR**: Area of the TAZ (sq. mi.) within a short (0.5 mile) walk of any transit service (including Metrorail and LRT) in the **off-peak** period
- **ALLOPLNG**: Area of the TAZ (sq. mi.) within a long (1 mile) walk of any transit service (including Metrorail and LRT) in the **off-peak** period
- Zone.dbf: Standard zonal attribute input file.
- HBWV2A1.dbf: A file with zonal information that is both created by WALKACC.S and then later read into WALKACC.S.

This file need not be sorted by TAZ (as can be seen in Figure 3-15).

Figure 3-15 An excerpt from the AreaWalk.txt file


TAZID	TAZ_AREA	MTLRTSHR	MTLRTLNG	ALLPKSHR	ALLPKLNG	ALLOPSHR	ALLOPLNG
1	0.0424	0.0228	0.0424	0.0424	0.0424	0.0424	0.0424
2	0.1576	0.0000	0.1576	0.1576	0.1576	0.1576	0.1576
3	0.2022	0.0393	0.2022	0.2022	0.2022	0.2022	0.2022
4	0.1596	0.1144	0.1596	0.1596	0.1596	0.1596	0.1596
5	0.0319	0.0044	0.0319	0.0319	0.0319	0.0319	0.0319
6	0.0412	0.0043	0.0412	0.0412	0.0412	0.0412	0.0412
7	0.0708	0.0000	0.0708	0.0708	0.0708	0.0708	0.0708
8	0.0708	0.0530	0.0708	0.0708	0.0708	0.0708	0.0708
9	0.1375	0.0964	0.1375	0.1375	0.1375	0.1375	0.1375
10	0.0585	0.0577	0.0585	0.0585	0.0585	0.0585	0.0585
11	0.0965	0.0965	0.0965	0.0965	0.0965	0.0965	0.0965
12	0.0645	0.0645	0.0645	0.0645	0.0645	0.0645	0.0645
13	0.0502	0.0502	0.0502	0.0502	0.0502	0.0502	0.0502
14	0.0366	0.0366	0.0366	0.0366	0.0366	0.0366	0.0366
15	0.1033	0.1033	0.1033	0.1033	0.1033	0.1033	0.1033
16	0.0210	0.0210	0.0210	0.0210	0.0210	0.0210	0.0210
17	0.0604	0.0604	0.0604	0.0604	0.0604	0.0604	0.0604
18	0.0501	0.0501	0.0501	0.0501	0.0501	0.0501	0.0501
19	0.0425	0.0425	0.0425	0.0425	0.0425	0.0425	0.0425
20	0.0556	0.0556	0.0556	0.0556	0.0556	0.0556	0.0556
21	0.0309	0.0309	0.0309	0.0309	0.0309	0.0309	0.0309
22	0.0487	0.0487	0.0487	0.0487	0.0487	0.0487	0.0487
23	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355
24	0.0420	0.0420	0.0420	0.0420	0.0420	0.0420	0.0420
25	0.0649	0.0649	0.0649	0.0649	0.0649	0.0649	0.0649
26	0.0466	0.0466	0.0466	0.0466	0.0466	0.0466	0.0466
27	0.0411	0.0411	0.0411	0.0411	0.0411	0.0411	0.0411
28	0.0596	0.0596	0.0596	0.0596	0.0596	0.0596	0.0596
29	0.0359	0.0359	0.0359	0.0359	0.0359	0.0359	0.0359
30	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355
31	0.0264	0.0264	0.0264	0.0264	0.0264	0.0264	0.0264
32	0.0886	0.0886	0.0886	0.0886	0.0886	0.0886	0.0886
33	0.0783	0.0464	0.0783	0.0783	0.0783	0.0783	0.0783
34	0.0433	0.0138	0.0433	0.0433	0.0433	0.0433	0.0433
35	0.0456	0.0456	0.0456	0.0456	0.0456	0.0456	0.0456
36	0.0507	0.0507	0.0507	0.0507	0.0507	0.0507	0.0507
37	0.0505	0.0505	0.0505	0.0505	0.0505	0.0505	0.0505
38	0.0545	0.0545	0.0545	0.0545	0.0545	0.0545	0.0545
39	0.0428	0.0428	0.0428	0.0428	0.0428	0.0428	0.0428
40	0.0671	0.0671	0.0671	0.0671	0.0671	0.0671	0.0671

The principal output files from WalkAcc.S are

- sidewalk.asc: Sidewalk links.
- walkacc.asc: Walk-access/walk-egress links.
- support.asc: Non-transit/support links.

Figure 3-16 shows walk access/egress links (mode 16) in TAZ 56, which is east of Foggy Bottom Metrorail Station. The thick, dark blue links, in the starburst shape, are the walk access/egress links for one zone (TAZ 56). The thin, dark blue segments are road links. The red links are transit-only links, and the thick, light blue and green links are the Metrorail links (Metrorail's Orange/Blue Line).

Figure 3-16 Walk access/egress links in TAZ 56, east of Foggy Bottom Metrorail Station

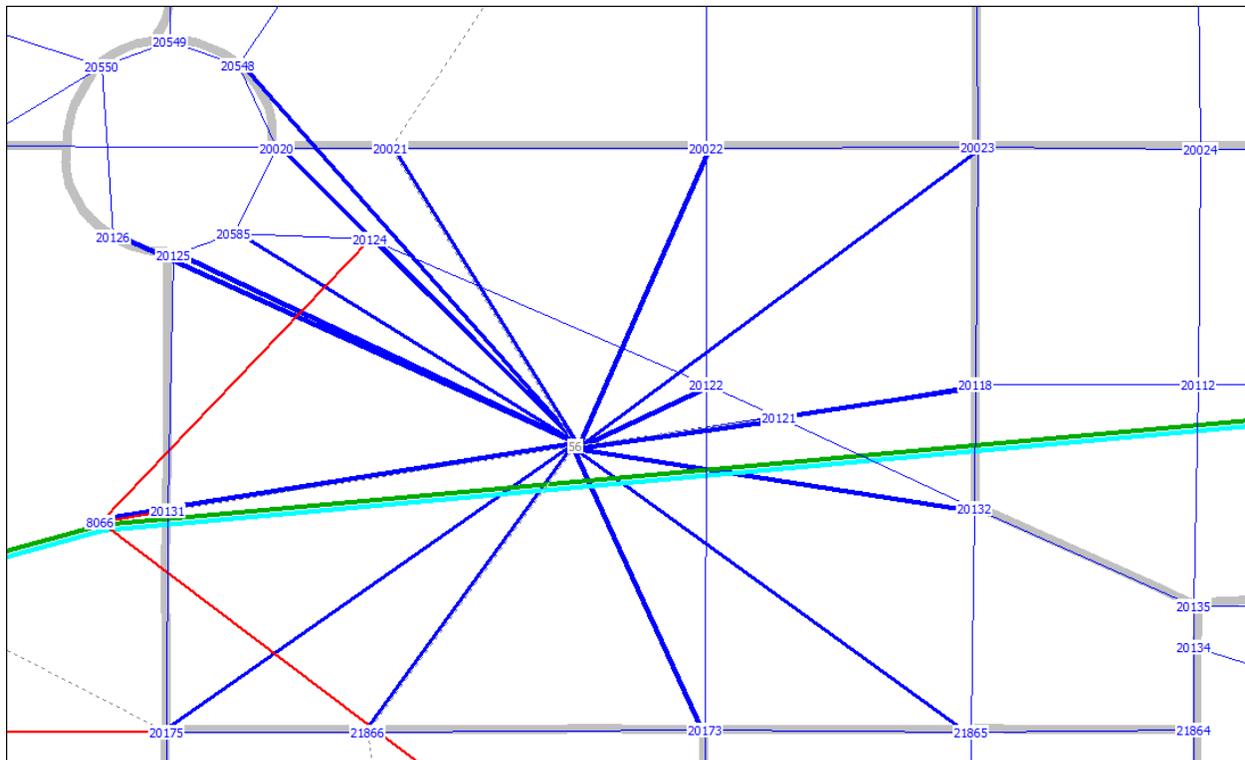

Ref: "L:\modelRuns\fy14\Ver2.3.52\_Conformity2013LRTP\_Xmittal\2010\_Final\zonehwy.net"; "support\_mode16\_taz56.asc" "MODE3AM.TB"

AutoAcc5.s requires the eight input files shown in Figure 3-14. Figure 3-17 shows an example of the drive-access links (mode 11) associated with the Ballston Metrorail Station park-and-ride (PNR) lot. The lot is located just to the south of the station, which appears as a black dot on the orange line representing Metrorail's Orange Line. Notice that the star-burst shape of the auto access links is not a simple circle, but rather has a directional orientation, reflecting the fact the people have less tendency to back-track when looking for parking at the production end of their trip.

Figure 3-17 Drive-access links associated with the Ballston Metrorail Station PNR lot



Ref: "L:\modelRuns\fy14\Ver2.3.52\_Conformity2013LRTP\_Xmittal\2010\_Final\zonehwy.net"; "MODE3AM.TB" "auto\_all\_ballston\_knr.asc" "auto\_all\_ballston\_pnr.asc" "support.asc"

### 3.3.4 Station Coordinate Files

The files in Table 3- that end with “\_node.tb” are the station coordinate files:

- Met\_node.tb: Metrorail stations
- Com\_node.tb: Commuter rail stations
- LRT\_node.tb: LRT stations/stops
- New\_node.tb: BRT and/or streetcar stations/stops

These files come directly from the geodatabase. The file extension of “TB” indicates “TRNBUILD” and was introduced by COG/TPB staff several years ago to differentiate the files from those formatted for the previous transit path builder, TRNPTH (“TP”). An excerpt from the Metrorail station coordinate file (met\_node.tb) can be seen in Figure 3-18. Coordinates are Maryland State Plane, NAD 1983, in feet.

Figure 3-18 Excerpt from the Metrorail station coordinate file (met\_node.tb)

XY NODE=	8001	X=	1265599	Y=	529193	::Shady Grove
XY NODE=	8002	X=	1270639	Y=	516540	::Rockville
XY NODE=	8003	X=	1278225	Y=	508218	::Twinbrook
XY NODE=	8004	X=	1280517	Y=	503088	::White Flint
XY NODE=	8005	X=	1282829	Y=	496367	::Grosvenor
XY NODE=	8006	X=	1284767	Y=	485106	::Medical Center
XY NODE=	8007	X=	1285560	Y=	479782	::Bethesda
XY NODE=	8008	X=	1288003	Y=	471196	::Friendship Heights
XY NODE=	8009	X=	1289640	Y=	466682	::Tenleytown
XY NODE=	8010	X=	1294409	Y=	464951	::Van Ness-UDC
XY NODE=	8011	X=	1295608	Y=	462324	::Cleveland Park
XY NODE=	8012	X=	1297352	Y=	458473	::Woodley Park-Zoo
XY NODE=	8013	X=	1299822	Y=	453020	::Dupont Circle
XY NODE=	8014	X=	1301030	Y=	450307	::Farragut North
XY NODE=	8015	X=	1304332	Y=	448558	::Metro Center
XY NODE=	8016	X=	1306089	Y=	448606	::Gallery Place
XY NODE=	8017	X=	1307581	Y=	447814	::Judiciary Square
XY NODE=	8018	X=	1310220	Y=	448408	::Union Station
XY NODE=	8019	X=	1313230	Y=	456638	::Rhode Island Ave
XY NODE=	8020	X=	1313751	Y=	461393	::Brookland-CUA
XY NODE=	8021	X=	1311788	Y=	467989	::Fort Totten
XY NODE=	8022	X=	1307186	Y=	476758	::Takoma

### 3.3.5 Transit Parking Lot Coordinate Files

The files in Table 3- that end with “\_pnrn.tb” are the transit parking lot coordinate files:

- met\_pnrn.tb: Metrorail PNR lot coordinates
- com\_pnrn.tb: Commuter rail PNR lot coordinates
- bus\_pnrn.tb: Bus PNR lot coordinates

- lrt\_pnrn.tb: LRT PNR lot coordinates
- new\_pnrn.tb: BRT and/or streetcar PNR lot coordinates

An excerpt from the Metrorail PNR lot coordinate file (met\_pnrn.tb) can be seen in Figure 3-19. Coordinates are Maryland State Plane, NAD 1983, in feet.

Figure 3-19 An excerpt of the Metrorail PNR lot coordinate file (met\_pnrn.tb)

XY	NODE=	11001	X=	1265315	Y=	529089	;;Shady Grove
XY	NODE=	11002	X=	1270959	Y=	516684	;;Rockville
XY	NODE=	11003	X=	1278613	Y=	508435	;;Twinbrook
XY	NODE=	11004	X=	1281327	Y=	503024	;;White Flint
XY	NODE=	11005	X=	1283249	Y=	496139	;;Grosvenor
XY	NODE=	11007	X=	1285562	Y=	479783	;;Bethesda
XY	NODE=	11019	X=	1313784	Y=	456689	;;Rhode Island Ave
XY	NODE=	11021	X=	1311284	Y=	468649	;;Fort Totten
XY	NODE=	11023	X=	1303903	Y=	483450	;;Silver Spring
XY	NODE=	11024	X=	1299517	Y=	491425	;;Forest Glen
XY	NODE=	11025	X=	1297560	Y=	499796	;;Wheaton
XY	NODE=	11026	X=	1297615	Y=	508431	;;Glenmont
XY	NODE=	11027	X=	1338527	Y=	489633	;;Greenbelt
XY	NODE=	11028	X=	1332678	Y=	476884	;;College Park
XY	NODE=	11029	X=	1324845	Y=	472917	;;PG Plaza
XY	NODE=	11030	X=	1321380	Y=	469383	;;West Hyattsville
XY	NODE=	11040	X=	1313758	Y=	436270	;;Anacostia
XY	NODE=	11042	X=	1319454	Y=	427220	;;Southern Avenue

### 3.3.6 Rail Links

The files in Table 3- that end with “\_link.tb” are the rail link files:

- met\_link.tb
- com\_link.tb
- lrt\_link.tb
- new\_link.tb

An excerpt of the Metrorail rail link file (met\_link.tb) is shown in Figure 3-20. The first record of the file is for the rail link (tracks) between Shady Grove Metrorail Station (8001) and Rockville Metrorail Station (8002). Metrorail is mode code 3 and this segment of track has a distance of 2.61 miles. The speed coded for each rail link is a function of the rail link distance.

Figure 3-20 An excerpt of the Metrorail rail link file (met\_link.tb)

LINK	NODES=	8001-	8002	MODES=	03	DIST=	261	ONEWAY=	N	SPEED=	40.05
LINK	NODES=	8002-	8003	MODES=	03	DIST=	213	ONEWAY=	N	SPEED=	40.20
LINK	NODES=	8003-	8004	MODES=	03	DIST=	109	ONEWAY=	N	SPEED=	22.00
LINK	NODES=	8004-	8005	MODES=	03	DIST=	135	ONEWAY=	N	SPEED=	41.40
LINK	NODES=	8005-	8006	MODES=	03	DIST=	219	ONEWAY=	N	SPEED=	44.60
LINK	NODES=	8006-	8007	MODES=	03	DIST=	102	ONEWAY=	N	SPEED=	31.50
LINK	NODES=	8007-	8008	MODES=	03	DIST=	170	ONEWAY=	N	SPEED=	34.40
LINK	NODES=	8008-	8009	MODES=	03	DIST=	91	ONEWAY=	N	SPEED=	23.40
LINK	NODES=	8009-	8010	MODES=	03	DIST=	109	ONEWAY=	N	SPEED=	33.30
LINK	NODES=	8010-	8011	MODES=	03	DIST=	55	ONEWAY=	N	SPEED=	18.90
LINK	NODES=	8011-	8012	MODES=	03	DIST=	80	ONEWAY=	N	SPEED=	21.30
LINK	NODES=	8012-	8013	MODES=	03	DIST=	115	ONEWAY=	N	SPEED=	35.70
LINK	NODES=	8013-	8014	MODES=	03	DIST=	56	ONEWAY=	N	SPEED=	15.30
LINK	NODES=	8014-	8015	MODES=	03	DIST=	79	ONEWAY=	N	SPEED=	22.20
LINK	NODES=	8015-	8016	MODES=	03	DIST=	33	ONEWAY=	N	SPEED=	17.40
LINK	NODES=	8015-	8068	MODES=	03	DIST=	46	ONEWAY=	N	SPEED=	24.60

### 3.3.7 Transfer Links

Non-transit links, or support links, include links to access the transit system, to egress from the transit system, and to transfer between transit routes. Transfer links are used to transfer between a rail or BRT mode (mode codes 3, 4, 5, and 10) and other rail/non-rail transit services in proximity by walk, such as from Metrorail to bus. Under current coding conventions, these transit transfer links are designated mode code 12. There are four transfer link files:

- met\_bus.tb
- com\_bus.tb
- lrt\_bus.tb
- new\_bus.tb

An excerpt from the file containing transfer links between Metrorail stations and bus stops is shown in Figure 3-21.

Figure 3-21 An excerpt from the file (met\_bus.tb) containing transfer links (mode 12) between Metrorail stations and bus stops

SUPPORT N=	8001-	22395	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8001-	22397	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8002-	9005	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8002-	22351	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8002-	22370	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8003-	22344	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8003-	22672	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8004-	22332	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8004-	22670	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8005-	22327	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8006-	22054	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8007-	22048	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8008-	22864	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8009-	20718	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8010-	20753	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8011-	20756	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8012-	20763	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3
SUPPORT N=	8013-	20503	ONEWAY=	N	MODES=	12	DIST =	1	SPEED =	3

The station file, mentioned earlier, contains up to four “bus” nodes for each rail station. “Bus node” means any transit node near the rail station that should be connected with the rail station. So, for example, for the Rockville Metrorail Station (8002), the first “bus” node (STAN1) is 9005, which is not a bus stop, but rather a commuter rail station (the Rockville MARC station). The pairing of each rail station and its associated “bus” nodes forms the transfer links that are found in the transfer link files.

### 3.3.8 Transit Line/Route Files

The AM Peak and Off-Peak transit line files are text files that contain operational information about individual transit lines/routes, including the average headway (frequency) for the time-of-day period, the average scheduled running time for the time-of-day period, and the route itinerary, which are the nodes through which the transit passes. Transit routes can be designated one-way or two-way. Figure 3-22 shows an example of a transit line file in TRNBUILD format for Mode 1 (local bus: Metrobus and DC Connector). The TPB transit networks currently designate ten mode codes as listed in Table 3-13.



Table 3-20 Header section for each transit route in a transit line file

File Name	Variable Name	Description
Mode<No. ><per>.tb	LINE NAME	Abbreviation of transit service provider name
	OWNER	The OWNER variable is currently being used to store five fields, which are separated by semicolons: <ol style="list-style-type: none"> <li>1. Transit operator</li> <li>2. Origin</li> <li>3. Destination</li> <li>4. Year represented</li> <li>5. Scenario</li> </ol>
	ONEWAY	Y/N (Y= Yes and N=No)
	MODE	Transit mode codes (1 - 10)
	FREQ[1]	Average time between successive arrivals (or departures) of transit vehicles on a given route for the period (AM or OP). Also known as average headway.
RUNTIME	Average time (in min) for the transit vehicle to go from the start to the finish of its route, for the given period (AM or OP)	

**Key:** <No.> = 1-10  
 <per> = AM (AM peak period) or OP (off-peak period).


After the route header information, there is a node itinerary, which is a list of nodes through which the route passes.

The file extension of “TB” in the names of the line files (also sometimes called “mode files”) indicates “TRNBUILD” and was introduced by COG/TPB staff several years ago to differentiate the files from those formatted for the previous transit path builder, TRNPTH (“TP”). A more standard file extension for these types of files is “LIN,” which stands for transit line/route.

### 3.3.9 Example of network coding

Figure 3-23 shows a diagram that illustrates the existing MWCOC/TRNBUILD convention for network coding around rail stations (Metro or commuter rail), park-and-ride lots, and bus service.

Figure 3-23 Existing MWCOC/TRNBUILD convention for network coding around rail stations, park-and-ride lots, and bus service

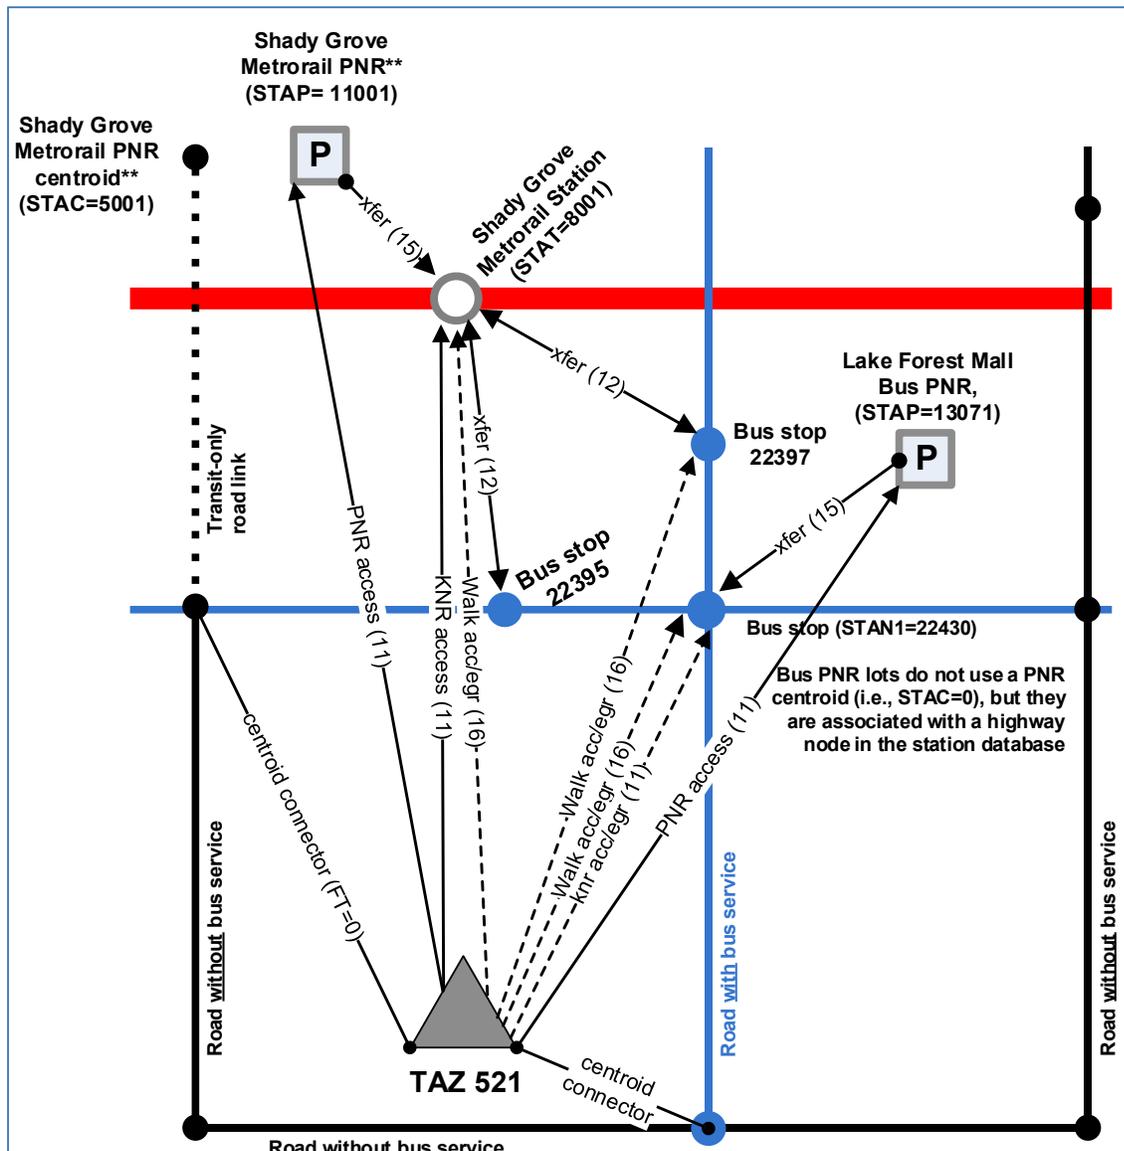

Ref:I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\V2.4network\_coding\_station\_diagr\_mwcog\_trnbuild.vsdX"

In Figure 3-23, numbers in parentheses are mode codes. For example, mode code 11 is drive access to transit, which can be either drive and park ("park and ride", PNR) or drive and drop off ("kiss and ride," KNR). Mode code 16 is for walk access or egress links. Two types of transfer links are shown in the diagram:

- Mode 12: Transfer between a rail mode and a non-rail transit mode (walk)
- Mode 15: Transfer between a PNR lot and the rail station (walk)

Also, the PNR node and the dummy PNR node are stored in the background highway network.

### 3.3.10 Transit route summaries

This section of the report presents transit route summaries. The network years available were discussed on Page 8 (essentially, 2025, 2026, 2030, 2040, 2045 and 2050).

Summaries of the AM peak period Metrorail routes are shown in Table 3-21. The table lists COG/TPB’s transit route name, origin and destination stations, average headways, average run-times, line distances, and average line speed for service during the AM peak hour and Off-peak period. Table 3-22 presents the same information, but for the off-peak period. Note: Some routes are denoted “A” even though there is only one of them, such as Blue Line A (“Blu-A”).

Table 3-21 AM peak-period Metrorail line summary by year: 2025, 2026, 2030, 2040, 2045 and 2050

Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)
WMBLUA	2025	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMGRNA	2025	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2025	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2025	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMYELA	2025	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMSILV	2025	LARGO	ASHBURN	10	90	43	29
WMBLUA	2026	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMGRNA	2026	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2026	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2026	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMYELA	2026	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMSILV	2026	LARGO	ASHBURN	10	90	43	29
WMBLUA	2030	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMGRNA	2030	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2030	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2030	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMYELA	2030	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMSILV	2030	LARGO	ASHBURN	10	90	43	29
WMBLUA	2040	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMYELA	2040	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMGRNA	2040	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2040	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2040	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMSILV	2040	LARGO	ASHBURN	10	90	43	29
WMBLUA	2045	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMYELA	2045	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMGRNA	2045	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2045	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2045	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMSILV	2045	LARGO	ASHBURN	10	90	43	29
WMBLUA	2050	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	10	66	30	27
WMYELA	2050	MT VERNON SQ	HUNTINGTON AV METRO	6	27	11	24
WMGRNA	2050	GREENBELT	BRANCH AVE	6	47	23	29
WMORNA	2050	VIENNA	NEW CARROLLTON	10	57	26	27
WMREDA	2050	SHADY GROVE METRO	GLENMONT METRO	5	65	32	30
WMSILV	2050	LARGO	ASHBURN	10	90	43	29

**Note:** AM peak period is from 7:00 – 7:59 AM.

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Source: Visualize 2050 and FY 2026-2029 TIP

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-22 Off-peak period Metrorail line summary by year: 2025, 2026, 2030, 2040, 2045 and 2050

Transit Route Name	Transit Yr.	Origin	Destination	Hdwy	RT (mins.)	Dist. (mi)	Spd (mph)
WMBLUA	2025	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2025	GREENBELT	BRANCH AVE	8	47	23	29
WMORNA	2025	VIENNA	NEW CARROLLTON	12	57	26	27
WMYELA	2025	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMSILV	2025	LARGO	ASHBURN	12	90	43	29
WMREDA	2025	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30
WMBLUA	2026	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2026	GREENBELT	BRANCH AVE	8	47	23	29
WMORNA	2026	VIENNA	NEW CARROLLTON	12	57	26	27
WMYELA	2026	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMSILV	2026	LARGO	ASHBURN	12	90	43	29
WMREDA	2026	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30
WMBLUA	2030	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2030	GREENBELT	BRANCH AVE	8	47	23	29
WMORNA	2030	VIENNA	NEW CARROLLTON	12	57	26	27
WMYELA	2030	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMSILV	2030	LARGO	ASHBURN	12	90	43	29
WMREDA	2030	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30
WMBLUA	2040	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2040	GREENBELT	BRANCH AVE	8	47	23	29
WMYELA	2040	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMORNA	2040	VIENNA	NEW CARROLLTON	12	57	26	27
WMSILV	2040	ASHBURN	LARGO	12	90	43	29
WMREDA	2040	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30
WMBLUA	2045	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2045	GREENBELT	BRANCH AVE	8	47	23	29
WMORNA	2045	VIENNA	NEW CARROLLTON	12	57	26	27
WMYELA	2045	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMSILV	2045	ASHBURN	LARGO	12	90	43	29
WMREDA	2045	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30
WMBLUA	2050	FRANCONIA/SPRINGFIELD	LARGO TWN CTR	12	66	30	27
WMGRNA	2050	GREENBELT	BRANCH AVE	8	47	23	29
WMORNA	2050	VIENNA	NEW CARROLLTON	12	57	26	27
WMYELA	2050	MT VERNON SQ	HUNTINGTON	8	27	11	24
WMSILV	2050	ASHBURN	LARGO	12	90	43	29
WMREDA	2050	SHADY GROVE METRO	GLENMONT METRO	5	63	32	30

Note: Off-peak period is from 10:00 AM- 2:59 PM

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Source: Visualize 2050 and FY 2026-2029 TIP

Line summaries for the AM peak commuter rail routes are shown in Table 3-23. Table 3-24 list line summaries for the off-peak period commuter rail routes. Line summaries for light rail and BRT/ Streetcar are shown in Table 3-25 and Table 3-26. Table 3-25 covers the AM peak period summaries and Table 3-26 covers the off-peak period summaries for all the Visualize 2050 AQC analysis forecast years (2025, 2026, 2030, 2040, 2045 and 2050).

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-23 AM peak-period commuter rail summary by year: 2025, 2026, 2030, 2040

Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)
MBR876	2025	BRUNSWICK STATION	UNION STATION	60	95	50	32
MBR878	2025	DUFFIELDS WVA	UNION STATION	60	110	66	36
MCAM840	2025	UNION STATION	DORSEY	60	39	29	45
MP502	2025	UNION STATION	BWI	60	39	31	48
VFRED1I	2025	SPOTSYLVANIA	WASHINGTON-UNION	30	104	60	35
VMAS321	2025	WASHINGTON-UNION	BROAD RUN	60	72	36	30
VMAS328	2025	BROAD RUN AIRPORT VRE	UNION STATION	60	79	36	27
MBR876	2026	BRUNSWICK STATION	UNION STATION	60	95	50	32
MBR878	2026	DUFFIELDS WVA	UNION STATION	60	110	66	36
MBR892	2026	FREDERICK	UNION	60	111	56	30
MCAM840	2026	UNION STATION	DORSEY	60	39	29	45
MCAM845	2026	DORSEY	WASHINGTON-UNION	60	51	29	34
MCAM847	2026	DORSEY	UNION STATION	60	54	29	32
MP404	2026	WASHINGTON-UNION	BWI	60	32	31	58
MP409	2026	BWI	UNION STATION	60	50	31	37
MP502	2026	UNION STATION	BWI	60	39	31	48
MP511	2026	BWI	UNION STATION	60	34	31	55
VFRED1I	2026	SPOTSYLVANIA	WASHINGTON-UNION	30	104	60	35
VMAS321	2026	WASHINGTON-UNION	BROAD RUN	60	72	36	30
VMAS328	2026	BROAD RUN AIRPORT VRE	UNION STATION	60	79	36	27
MBR876	2030	BRUNSWICK STATION	UNION STATION	60	95	50	32
MBR878	2030	DUFFIELDS WVA	UNION STATION	60	110	66	36
MBR892	2030	FREDERICK	UNION	60	111	56	30
MCAM840	2030	UNION STATION	DORSEY	60	39	29	45
MCAM845	2030	DORSEY	WASHINGTON-UNION	60	51	29	34
MCAM847	2030	DORSEY	UNION STATION	60	54	29	32
MP404	2030	WASHINGTON-UNION	BWI	60	32	31	58
MP409	2030	BWI	UNION STATION	60	50	31	37
MP502	2030	UNION STATION	BWI	60	39	31	48
MP511	2030	BWI	UNION STATION	60	34	31	55
VFRED1I	2030	SPOTSYLVANIA	WASHINGTON-UNION	30	104	60	35
VMAS321	2030	WASHINGTON-UNION	BROAD RUN	60	72	36	30
VMAS328	2030	BROAD RUN AIRPORT VRE	UNION STATION	60	79	36	27
MBR876	2040	BRUNSWICK STATION	UNION STATION	60	95	50	32
MBR878	2040	DUFFIELDS WVA	UNION STATION	60	110	66	36
MBR892	2040	FREDERICK	UNION	60	111	56	30
MCAM840	2040	UNION STATION	DORSEY	60	39	29	45
MCAM845	2040	DORSEY	WASHINGTON-UNION	60	51	29	34
MCAM847	2040	DORSEY	UNION STATION	60	54	29	32
MP404	2040	WASHINGTON-UNION	BWI	60	32	31	58
MP409	2040	BWI	UNION STATION	60	50	31	37
MP502	2040	UNION STATION	BWI	60	39	31	48
MP511	2040	BWI	UNION STATION	60	34	31	55
VFRED1I	2040	SPOTSYLVANIA	WASHINGTON-UNION	30	104	60	35
VMAS321	2040	WASHINGTON-UNION	BROAD RUN	60	72	36	30
VMAS328	2040	BROAD RUN AIRPORT VRE	UNION STATION	60	79	36	27

**Note:** The AM peak period is from 6:00 to 8:59 AM, with the AM peak hour being considered 7:00 – 7:59 AM, **except for transit service in the outer areas of the region where the AM peak hour is considered 6:00-6:59 AM.** Year 2045 and 2050 commuter rail data is the same as 2040.

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-24 Off-peak-period commuter rail summary by year: 2025, 2026, 2030, 2040

Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)
AMTKM176	2025	MANASSAS	UNION STATION	60	60	33	33
MPEN1I	2025	BWI	UNION STATION	60	40	31	47
MPEN1O	2025	UNION STATION	BWI	60	34	31	55
VFRED1O	2025	WASHINGTON-UNION	SPOTSYLVANIA	60	107	60	34
VMAS325	2025	UNION STATION	BROAD RUN	60	79	36	27
VMAS336	2025	BROAD RUN	WASHINGTON-UNION	60	70	36	31
AMTKM176	2026	MANASSAS	UNION STATION	60	60	33	33
MPEN1I	2026	BWI	UNION STATION	60	40	31	47
MPEN1O	2026	UNION STATION	BWI	60	34	31	55
VFRED1O	2026	WASHINGTON-UNION	SPOTSYLVANIA	60	107	60	34
VMAS325	2026	UNION STATION	BROAD RUN	60	79	36	27
VMAS336	2026	BROAD RUN	WASHINGTON-UNION	60	70	36	31
AMTKM176	2030	MANASSAS	UNION STATION	60	60	33	33
MPEN1I	2030	BWI	UNION STATION	60	40	31	47
MPEN1O	2030	UNION STATION	BWI	60	34	31	55
VFRED1O	2030	WASHINGTON-UNION	SPOTSYLVANIA	60	107	60	34
VMAS325	2030	UNION STATION	BROAD RUN	60	79	36	27
VMAS336	2030	BROAD RUN	WASHINGTON-UNION	60	70	36	31
AMTKM176	2040	MANASSAS	UNION STATION	60	60	33	33
MPEN1I	2040	BWI	UNION STATION	60	40	31	47
MPEN1O	2040	UNION STATION	BWI	60	34	31	55
VFRED1O	2040	WASHINGTON-UNION	SPOTSYLVANIA	60	107	60	34
VMAS325	2040	UNION STATION	BROAD RUN	60	79	36	27
VMAS336	2040	BROAD RUN	WASHINGTON-UNION	60	70	36	31

**Note:** Off-peak period headways and runtimes are calculated using the period from 10:00 AM- 2:59 PM. Years 2045 and 2050 commuter rail data is the same as 2040.

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Source: Visualize 2050 and FY 2026-2029 TIP

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-25 AM peak-period light rail, BRT, streetcar summary by year: 2025, 2026, 2030, 2040, 2045 and 2050

Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)	Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)
DCSTHT1	2025	UNION STATION	Benning Rd & Oklahoma Ave	12	19	2	6	29BRT1	2045	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22
DCSTHT2	2025	Benning Rd & Oklahoma Ave	Union Station	12	20	2	6	29BRT2S	2045	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14
MWAYN	2025	Braddock Rd Metro	Pentagon City Metro	12	24	4	10	DCSTHT2	2045	Benning Rd Metro	Union Station	10	24	4	10
MWAYS	2025	Pentagon City Metro	Braddock Rd Metro	12	23	4	10	PURPLE	2045	Bethesda	New Carrollton Metro	6	59	16	16
29BRT1	2025	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22	MWAYN	2045	Braddock Rd Metro	Pentagon City Metro	12	22	4	11
29BRT2S	2025	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14	MWAYS	2045	Pentagon City Metro	Braddock Rd Metro	12	21	4	11
DCSTHT1	2026	UNION STATION	Benning Rd & Oklahoma Ave	12	19	2	6	NBETHBRT	2045	Montgomery Mall Transit Center	White Flint Metro Station	7	17	3	11
29BRT2S	2026	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14	RANDBRT	2045	White Flint Metro Station	US 29 & Tech Rd.	7	50	11	13
MWAYN	2026	Braddock Rd Metro	Pentagon City Metro	12	24	4	10	US1BRT	2045	HUNTINGTON METRO STATION	WOODBIDGE VRE	6	38	15	24
MWAYS	2026	Pentagon City Metro	Braddock Rd Metro	12	23	4	10	VIERSBRT1	2045	Wheaton Metro Station	Rockville Metro Station	9	25	6	14
VANDBRT2	2026	Van Dorn Metro	Landmark Mall	10	5	1	12	VIERSBRT2	2045	Wheaton Metro Station	Montgomery College	15	29	8	17
	2026	Benning Rd & Oklahoma Ave	Union Station	12	20	2	6	355BRT1C	2045	Clarksburg Outlets	Montgomery College - Rockville	10	60	18	18
29BRT1	2026	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22	355BRT1G	2045	Germantown Transit Center	Montgomery College - Rockville	10	60	10	10
29BRT1	2030	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22	355BRT2	2045	Lakeforest Transit Center	Grosvenor Metro Station	10	24	12	30
29BRT2S	2030	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14	355BRT3	2045	Montgomery College - Rockville	Bethesda Metro Station	10	32	9	17
DCSTHT2	2030	Benning Rd Metro	Union Station	10	24	4	10	NHBRT	2045	Colesville PNR	Takoma Park Metro Station	7	26	10	23
MWAYN	2030	Braddock Rd Metro	Pentagon City Metro	12	22	4	11	VANDBRT2	2045	Van Dorn Metro	Pentagon	10	30	9	18
MWAYS	2030	Pentagon City Metro	Braddock Rd Metro	12	21	4	11	VANDBRT1	2045	Van Dorn Metro	Pentagon	10	21	8	23
PURPLE	2030	Bethesda	New Carrollton Metro	6	59	16	16	29BRT1	2050	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22
VIERSBRT1	2030	Wheaton Metro Station	Rockville Metro Station	9	25	6	14	29BRT2S	2050	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14
355BRT1C	2030	Clarksburg Outlets	Montgomery College - Rockville	10	60	18	18	DCSTHT2	2050	Benning Rd Metro	Union Station	10	24	4	10
355BRT1G	2030	Germantown	Montgomery College - Rockville	10	60	10	10	PURPLE	2050	Bethesda	New Carrollton Metro	6	59	16	16
355BRT2	2030	Lakeforest Transit Center	Grosvenor Metro Station	10	24	12	30	MWAYN	2050	Braddock Rd Metro	Pentagon City Metro	12	22	4	11
355BRT3	2030	Montgomery College - Rockville	Bethesda Metro Station	10	32	9	17	MWAYS	2050	Pentagon City Metro	Braddock Rd Metro	12	21	4	11
VIERSBRT2	2030	Wheaton Metro Station	Montgomery College	15	29	8	17	NBETHBRT	2050	Montgomery Mall Transit Center	White Flint Metro Station	7	17	3	11
VANDBRT2	2030	Van Dorn Metro	Pentagon	10	30	9	18	RANDBRT	2050	White Flint Metro Station	US 29 & Tech Rd.	7	50	11	13
VANDBRT1	2030	Van Dorn Metro	Pentagon	10	21	8	23	US1BRT	2050	HUNTINGTON METRO STATION	WOODBIDGE VRE	6	38	15	24
29BRT1	2040	Burtonsville PNR	Silver Spring Transit Center	15	30	11	22	VIERSBRT1	2050	Wheaton Metro Station	Rockville Metro Station	9	25	6	14
29BRT2S	2040	Briggs Chaney PNR	Silver Spring Transit Center	15	46	11	14	VIERSBRT2	2050	Wheaton Metro Station	Montgomery College	15	29	8	17
DCSTHT2	2040	Benning Rd Metro	Union Station	10	24	4	10	355BRT1C	2050	Clarksburg Outlets	Montgomery College - Rockville	10	60	18	18
MWAYN	2040	Braddock Rd Metro	Pentagon City Metro	12	22	4	11	355BRT1G	2050	Germantown Transit Center	Montgomery College - Rockville	10	60	10	10
MWAYS	2040	Pentagon City Metro	Braddock Rd Metro	12	21	4	11	355BRT2	2050	Lakeforest Transit Center	Grosvenor Metro Station	10	24	12	30
US1BRT	2040	HUNTINGTON METRO STATION	WOODBIDGE VRE	6	38	15	24	355BRT3	2050	Montgomery College - Rockville	Bethesda Metro Station	10	32	9	17
VIERSBRT1	2040	Wheaton Metro Station	Rockville Metro Station	9	25	6	14	NHBRT	2050	Colesville PNR	Takoma Park Metro Station	7	26	10	23
VIERSBRT2	2040	Wheaton Metro Station	Montgomery College	15	29	8	17	VANDBRT2	2050	Van Dorn Metro	Pentagon	10	30	9	18
355BRT1C	2040	Clarksburg Outlets	Montgomery College - Rockville	10	60	18	18	VANDBRT1	2050	Van Dorn Metro	Pentagon	10	21	8	23
355BRT1G	2040	Germantown Transit Center	Montgomery College - Rockville	10	60	10	10								
355BRT2	2040	Lakeforest Transit Center	Grosvenor Metro Station	10	24	12	30								
355BRT3	2040	Montgomery College - Rockville	Bethesda Metro Station	10	32	9	17								
PURPLE	2040	Bethesda	New Carrollton Metro	6	59	16	16								
VANDBRT2	2040	Van Dorn Metro	Pentagon	10	30	9	18								
VANDBRT1	2040	Van Dorn Metro	Pentagon	10	21	8	23								

Note: AM peak period is represented by the service occurring from 7:00 -7:59 AM with the exception of transit service from the outer areas of the region where AM peak reflects 6:00-6:59 AM.

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Source: Visualize 2050 and FY 2026-2029 TIP

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 3-26 Off-peak-period light rail, BRT, streetcar summary by year: 2025, 2026, 2030, 2040, 2045 and 2050

Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)	Transit Route Name	Transit Year	Origin	Destination	Hdwy	RT(mins.)	Dis.(mi)	Spd(mph)
DCSTHST1	2025	UNION STATION	Benning Rd & Oklahoma Ave	12	19	2	6	29BRT2S	2045	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18
MWAYN	2025	Braddock Rd Metro	Pentagon City Metro	12	21	4	11	PURPLE	2045	Bethesda	New Carrollton Metro	12	59	16	16
MWAYS	2025	Pentagon City Metro	Braddock Rd Metro	12	23	4	10	DCSTHST2	2045	Benning Rd Metro	Union Station	10	24	4	10
DCSTHST2	2025	Benning Rd & Oklahoma Ave	Union Station	12	20	2	6	MWAYN	2045	Braddock Rd Metro	Pentagon City Metro	12	19	4	13
29BRT2S	2025	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18	MWAYS	2045	Pentagon City Metro	Braddock Rd Metro	12	21	4	11
29BRT2S	2026	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18	NBETHBRT	2045	Montgomery Mall Transit Center	White Flint Metro Station	15	17	3	11
DCSTHST1	2026	UNION STATION	Benning Rd & Oklahoma Ave	12	19	2	6	RANDBRT	2045	White Flint Metro Station	US 29 & Tech Rd.	15	50	11	13
MWAYN	2026	Braddock Rd Metro	Pentagon City Metro	12	21	4	11	US1BRT	2045	HUNTINGTON METRO STATION	WOODBRIIDGE VRE	6	38	15	24
MWAYS	2026	Pentagon City Metro	Braddock Rd Metro	12	23	4	10	355BRT1C	2045	Clarksburg Outlets	Montgomery College - Rockville	15	60	18	18
VANDBRT2	2026	Van Dorn Metro	Landmark Mall	10	5	1	12	355BRT1G	2045	Germantown Transit Center	Montgomery College - Rockville	15	60	10	10
DCSTHST2	2026	Benning Rd & Oklahoma Ave	Union Station	12	20	2	6	355BRT2	2045	Lakeforest Transit Center	Grosvenor Metro Station	15	24	12	30
29BRT2S	2030	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18	355BRT3	2045	Montgomery College - Rockville	Bethesda Metro Station	15	32	9	17
DCSTHST2	2030	Benning Rd Metro	Union Station	10	24	4	10	NHBRT	2045	Colesville PNR	Takoma Park Metro Station	15	26	10	23
PURPLE	2030	Bethesda	New Carrollton Metro	12	59	16	16	VIERSBRT1	2045	Wheaton Metro Station	Rockville Metro Station	18	20	6	18
MWAYN	2030	Braddock Rd Metro	Pentagon City Metro	12	19	4	13	VIERSBRT2	2045	Wheaton Metro Station	Montgomery College	30	24	8	20
MWAYS	2030	Pentagon City Metro	Braddock Rd Metro	12	21	4	11	VANDBRT2	2045	Van Dorn Metro	Pentagon	15	30	9	18
355BRT1C	2030	Clarksburg Outlets	Montgomery College - Rockville	15	60	18	18	VANDBRT1	2045	Van Dorn Metro	Pentagon	15	21	8	23
355BRT1G	2030	Germantown Transit Center	Montgomery College - Rockville	15	60	10	10	29BRT2S	2050	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18
355BRT2	2030	Lakeforest Transit Center	Grosvenor Metro Station	15	24	12	30	PURPLE	2050	Bethesda	New Carrollton Metro	12	59	16	16
355BRT3	2030	Montgomery College - Rockville	Bethesda Metro Station	15	32	9	17	DCSTHST2	2050	Benning Rd Metro	Union Station	10	24	4	10
VIERSBRT1	2030	Wheaton Metro Station	Rockville Metro Station	18	20	6	18	MWAYN	2050	Braddock Rd Metro	Pentagon City Metro	12	19	4	13
VIERSBRT2	2030	Wheaton Metro Station	Montgomery College	30	24	8	20	MWAYS	2050	Pentagon City Metro	Braddock Rd Metro	12	21	4	11
VANDBRT2	2030	Van Dorn Metro	Pentagon	15	30	9	18	NBETHBRT	2050	Montgomery Mall Transit Center	White Flint Metro Station	15	17	3	11
VANDBRT1	2030	Van Dorn Metro	Pentagon	15	21	8	23	RANDBRT	2050	White Flint Metro Station	US 29 & Tech Rd.	15	50	11	13
29BRT2S	2030	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18	US1BRT	2050	HUNTINGTON METRO STATION	WOODBRIIDGE VRE	6	38	15	24
VANDBRT2	2040	Van Dorn Metro	Pentagon	15	30	9	18	355BRT1C	2050	Clarksburg Outlets	Montgomery College - Rockville	15	60	18	18
VANDBRT1	2040	Van Dorn Metro	Pentagon	15	21	8	23	355BRT1G	2050	Germantown Transit Center	Montgomery College - Rockville	15	60	10	10
29BRT2S	2040	Briggs Chaney PNR	Silver Spring Transit Center	14	36	11	18	355BRT2	2050	Lakeforest Transit Center	Grosvenor Metro Station	15	24	12	30
PURPLE	2040	Bethesda	New Carrollton Metro	12	59	16	16	355BRT3	2050	Montgomery College - Rockville	Bethesda Metro Station	15	32	9	17
DCSTHST2	2040	Benning Rd Metro	Union Station	10	24	4	10	NHBRT	2050	Colesville PNR	Takoma Park Metro Station	15	26	10	23
MWAYN	2040	Braddock Rd Metro	Pentagon City Metro	12	19	4	13	VIERSBRT1	2050	Wheaton Metro Station	Rockville Metro Station	18	20	6	18
MWAYS	2040	Pentagon City Metro	Braddock Rd Metro	12	21	4	11	VIERSBRT2	2050	Wheaton Metro Station	Montgomery College	30	24	8	20
US1BRT	2040	HUNTINGTON METRO STATION	WOODBRIIDGE VRE	6	38	15	24	VANDBRT2	2050	Van Dorn Metro	Pentagon	15	30	9	18
VIERSBRT1	2040	Wheaton Metro Station	Rockville Metro Station	18	20	6	18	VANDBRT1	2050	Van Dorn Metro	Pentagon	15	21	8	23
VIERSBRT2	2040	Wheaton Metro Station	Montgomery College	30	24	8	20								
355BRT1C	2040	Clarksburg Outlets	Montgomery College - Rockville	15	60	18	18								
355BRT1G	2040	Germantown Transit Center	Montgomery College - Rockville	15	60	10	10								
355BRT2	2040	Lakeforest Transit Center	Grosvenor Metro Station	15	24	12	30								
355BRT3	2040	Montgomery College - Rockville	Bethesda Metro Station	15	32	9	17								

Note: Off-peak period is from 10:00 AM- 2:59 PM.

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\Visualize2050\_Met\_Com\_BRT\_Files.xlsx"

Source: Visualize 2050 and FY 2026-2029 TIP

Table 3-27 shows the rail and road centerline miles for the years 2025, 2026, 2030, 2040, 2045 2050.

Table 3-27 Rail centerline and road lane miles

**RAIL AND ROAD MILES  
(Modeled Area)**

	LOV LANE MILES	HOV/HOT LANE MILES	METRORAIL MILES	COMMUTER RAIL*	BRT** MILES	STREETCAR, LIGHT RAIL *** MILES
	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL	TOTAL
2025	23251	321	165	255	14	2
2026	23253	329	165	255	16	2
2030	23406	354	165	255	54	20
2040	23704	371	165	255	69	20
2045	23918	391	165	255	93	20
2050	23960	391	165	255	93	20

\*Includes VRE and MARC

\*\*Includes Metroway, US29, Viers Mill Rd., North Bethesda, MD 355, US1 (VA), Randolph Rd., New Hampshire Ave., Van Dorn St.


\*\*\*DC Streetcar, & Purple Line

NOTE: If a lane operates as HOV/HOT during any part of the day it is counted in the HOV/HOT column. Rail miles are centerline miles and road miles are directional miles, since LOV and HOV facilities are coded directionally.

**3.4 Transit path building**

The transit path building and path skimming process involves the development of 22 sets of level-of-service (LOS) skims (matrices) corresponding to two time-of-day period (peak and off-peak), by four transit sub-modes (bus only, Metrorail only, bus-Metrorail combination, and commuter rail), by three access modes (walk, PNR, KNR). For the calculation of average headways and run times, the peak period is represented by the AM peak hour, and the off-peak period is represented by the six-hour midday period. Although one might expect 24 sets of skims (2 x 3 x 4), there are only 22 since KNR access to commuter rail mode is not considered by the mode choice model, and so the total number of required path sets equals 22. This process is shown schematically in Figure 3-24 and is covered in more detail in Chapter 21 of the most recent Gen2/Version 2.4.6 Travel Model User’s Guide.

Figure 3-24 Process for conducting transit path building

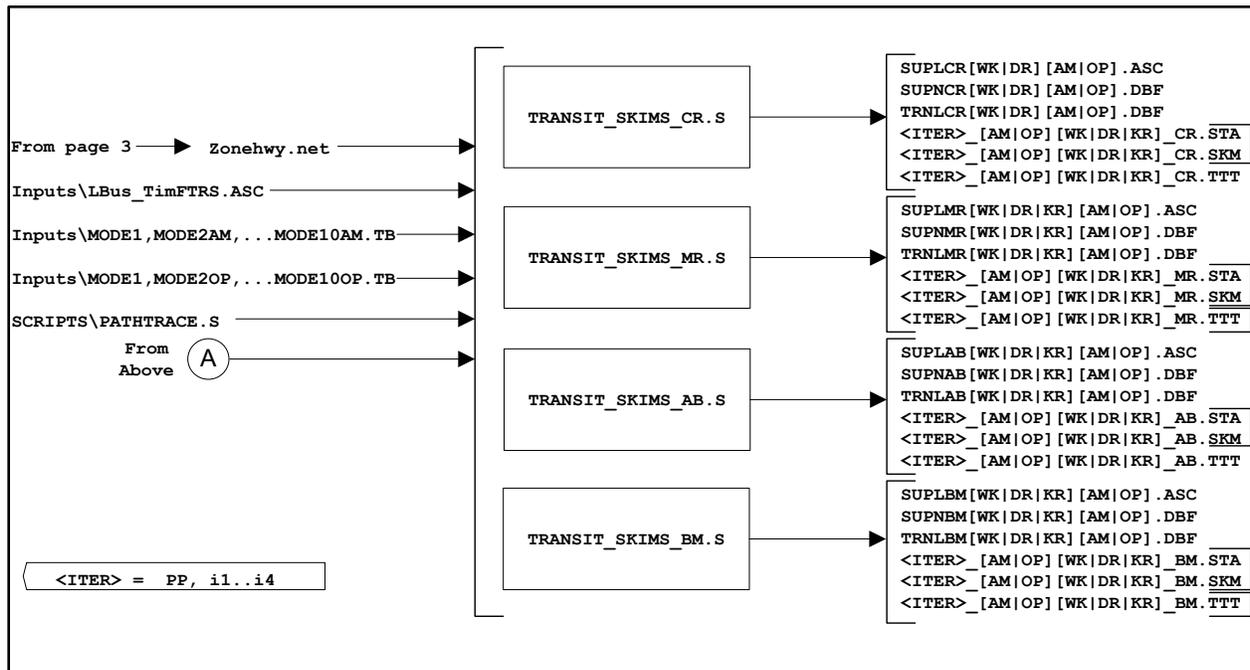

### 3.5 Transit Fare Files

#### 3.5.1 Gathering fare data from the transit providers

WMATA is the dominant transit operator in the Washington, D.C. area, operating both the Metrorail and Metrobus systems. WMATA was created in 1967 as an interstate compact agency. The formal name for its area of coverage is the “Washington Metropolitan Area Transit Zone” (WMATZ), but it is more commonly referred to as the WMATA Compact area. As of 2009, the area includes the following jurisdictions:

- District of Columbia
- The following cities in Virginia
  - Alexandria
  - Falls Church
  - Fairfax
- The following counties in Virginia
  - Arlington
  - Fairfax
  - Loudoun
- The following counties in Maryland
  - Montgomery
  - Prince George’s

The tariff used for this analysis was Tariff #45 that was effective June 30, 2024.

In addition to the WMATA tariff, transit fare data is collected for the other transit operators in the modeled area, such as Ride-On, ART, Fairfax Connector, MARC, VRE, and PRTC/Omni. Transit fare data for the Visualize 2050 LRTP is documented in a memo.<sup>22</sup>

### 3.5.2 Calculating zone-to-zone fares used by the model

The COG transit fare programs are known as MFARE1 and MFARE2. These were originally written as UMODEL programs, known as RPFARE1 and RPFARE2,<sup>23</sup> within the UTPS mainframe software system. In the early 1990s, they were then converted to FORTRAN programs called MFARE1 and MFARE2 for the Maryland Department of Transportation, and then, a year later, they were converted to Microsoft FORTRAN 5.0 for use with MINUTP.<sup>24</sup> The FORTRAN version was used in the Gen2/Version 2.1D #50 Travel Model, in 2004. In 2007 or 2008, MFARE1 and MFARE2 were converted to TP+ scripts (which is now Cube Voyager), though the conversion was not documented, and the MFARE1 and MFARE2 scripts were first used in the Gen2/Version 2.2 Travel Model in the spring of 2008.

**MFARE1 estimates station-to-station Metrorail fares**, which are distance based. Per WMATA policy, the distance component of the fare calculation is based on a “composite mile,” which is calculated as the average of (a) the distance traveled along the rail system between the passenger’s origin and destination stations and (b) the distance traveled in a straight line or “as the crow flies” between the two stations.<sup>25</sup> **MFARE2 first calculates non-Metrorail transit fares (commonly referred to as “bus” fares**, even though non-Metrorail transit also includes commuter rail, LRT, and BRT). **Next, MFARE2 outputs the following zone-to-zone matrices:**

1. Total transit fares. For paths that include Metrorail, this would include both the Metrorail fare and any other non-Metrorail transit fare that is involved.
2. Metrorail-only fares
3. “Bus”-only fares (i.e., non-Metrorail-transit-only fares)
4. “Bus” access to Metrorail fares (i.e., non-Metrorail-transit access to Metrorail fares)
5. “Bus” egress from Metrorail fares (i.e., non-Metrorail-transit egress from Metrorail fares)<sup>26</sup>

MFARE1 estimates station-to-station Metrorail fares using the composite distance, according to the following procedure, which is based on rules in the WMATA tariff:

- A fixed boarding fare charged for the first few miles.
- A secondary fare charged for the next few miles.
- A "tertiary" fare per mile charged for the remaining miles of the trips.
- The sum of above three fare elements should be less or equal to a maximum fare.

---

<sup>22</sup> Wanda Owens to Files, “Transit Fares for the Visualize 2050 and FY2026-2029 TIP Air Quality Conformity Analysis” Memorandum, November 14, 2024.

<sup>23</sup> “RP” stands for the name of the original developer: Richard Pratt.

<sup>24</sup> William G. Allen Jr., “User’s Guide for the MWCOG Fare Programs, Microcomputer Version,” Final (Metropolitan Washington Council of Governments, June 1992), 2.

<sup>25</sup> Washington Metropolitan Area Transit Authority, “Tariff of The Washington Metropolitan Area Transit Authority Tariff on METRO FARES, Tariff Number 45, Effective June 30, 2024, page 9”.

<sup>26</sup> Allen, “User’s Guide for the MWCOG Fare Programs, Microcomputer Version,” 2.

- Calculate discounted fare which applies to certain stations.
- Output final fares to a station-to-station matrix.<sup>27</sup>

One of the key inputs to the MFARE1 process is the section of the WMATA Tariff dealing with Metrorail fares (see, for example, Table 3-28). From this table, we can see that a maximum regular fare (\$6.75) exclusive of surcharge and differentials. The WMATA fare tariff data is input to the model using the file tariff.txt (see Figure 3-25)

Table 3-28 Metrorail fare structure, WMATA Tariff #45

<b>Metrorail Fare Structure (Effective June 26, 2023)</b>	<b>Regular Fare</b>	<b>Late Night and Weekend</b>
Base fare (First 3 composite miles)	\$2.25	\$2.25
Each additional composite mile more than 3	\$.45	\$.45
Maximum fare (Exclusive of Surcharge and Differentials)	\$6.75	\$2.25

Source: WMATA. "Tariff of The Washington Metropolitan Area Transit Authority Tariff on METRO FARES, Tariff Number 45, Effective June 30, 2024, page 10"

---

<sup>27</sup> Allen, 3.

Figure 3-25 Metrorail fares (peak and off-peak) and the rail-to-bus discounts (Tariff.txt)

```

;;-----
;;
;; WMATA Tariff 45 effective June 30,2024 fare structure input to MFARE2.S
;; plus $2.25 rail-to-bus discount
;;
;;
;;
;; (Prepared July 30, 2024/jp)
;;
;; file tariff.txt
;;-----
;; Peak and OffPeak Metrorail Policy
;
; Fare Increment      Fare Rate in Cents      Trip Distance Increment(in Composite Miles)
; in Cents           per Composite mile:    Associated with Fare Increment/Rate
;-----
Pk_Fare_Incr1 = 225.0  Pk_Fare_Rate1 = 0.0  Pk_Fare_Dist1 = 3.0 ;
Op_Fare_Incr1 = 225.0  Op_Fare_Rate1 = 0.0  Op_Fare_Dist1 = 3.0 ;

Pk_Fare_Incr2 = 0.0    Pk_Fare_Rate2 = 45.0  Pk_Fare_Dist2 = 3.0 ;
Op_Fare_Incr2 = 0.0    Op_Fare_Rate2 = 45.0  Op_Fare_Dist2 = 3.0 ;

Pk_Fare_Incr3 = 0.0    Pk_Fare_Rate3 = 45.0                ;
Op_Fare_Incr3 = 0.0    Op_Fare_Rate3 = 45.0                ;

Pk_Fare_Max    = 675.0                ;
Op_Fare_Max    = 675.0                ;

;;-----
;; Rail-to-Bus discounts in current year cents based on selected tariff  ;;
;;
;;
DC_RailBus_Disc = 225.0 ; Area defined by Jur='0' in the zone file input ;; Discount available to SmartTrip card holders only
MD_RailBus_Disc = 225.0 ; Area defined by Jur='1' in the zone file input ;;
VA1_RailBusDisc = 225.0 ; Area defined by Jur='2' in the zone file input ;;
VA2_RailBusDisc = 225.0 ; Area defined by Jur='3' in the zone file input ;;

```

MFARE2 calculates “bus” (non-Metrorail transit) fares using a set of “bus” fare zones. The current program allows for up to 21 bus fare zones in the modeled area. Each TAZ must be associated with either one or two bus fare zones. This is done in the TAZ fare zone file (TAZFRZN.ASC), which is discussed later. The geography of the bus fare Dist zones can be changed from year to year, to reflect areas that have similar transit fares, such as the area around a commuter rail line. Maps of the current bus fare zones can be seen in Figure 3-26 and Figure 3-28. The first figure shows the primary bus fare zones. The second shows the secondary bus fare zones. And the third figure shows the combined effect of overlaying the two bus fare zone systems. Bus fare zone 1 (Figure 3-26) corresponds roughly to the original WMATA Compact area, before Loudoun County was added. In some cases, the bus fare zones are in two discontinuous pieces, such as bus fare zone 2 (Figure 3-26). In some cases, the bus fare zone may be made up of three discontinuous pieces, such as bus fare zone 9, which has two sections in Figure 3-26 and one section in Figure 3-27. In Figure 3-28, we can see the combined effect: there are some parts of Frederick Co. where the TAZs are associated with only one bus fare zone (such as 8, 9 or, 10), but there are some parts of Frederick Co. where the TAZs are associated with two bus fare zones (such as 8 and 9, or 9 and 10). At any rate, no TAZ can be associated with more than two bus fare zones. Names for the 21 bus fare zones can be found in Table 3-.

Figure 3-26 Regional Primary Bus Fare Zone Map

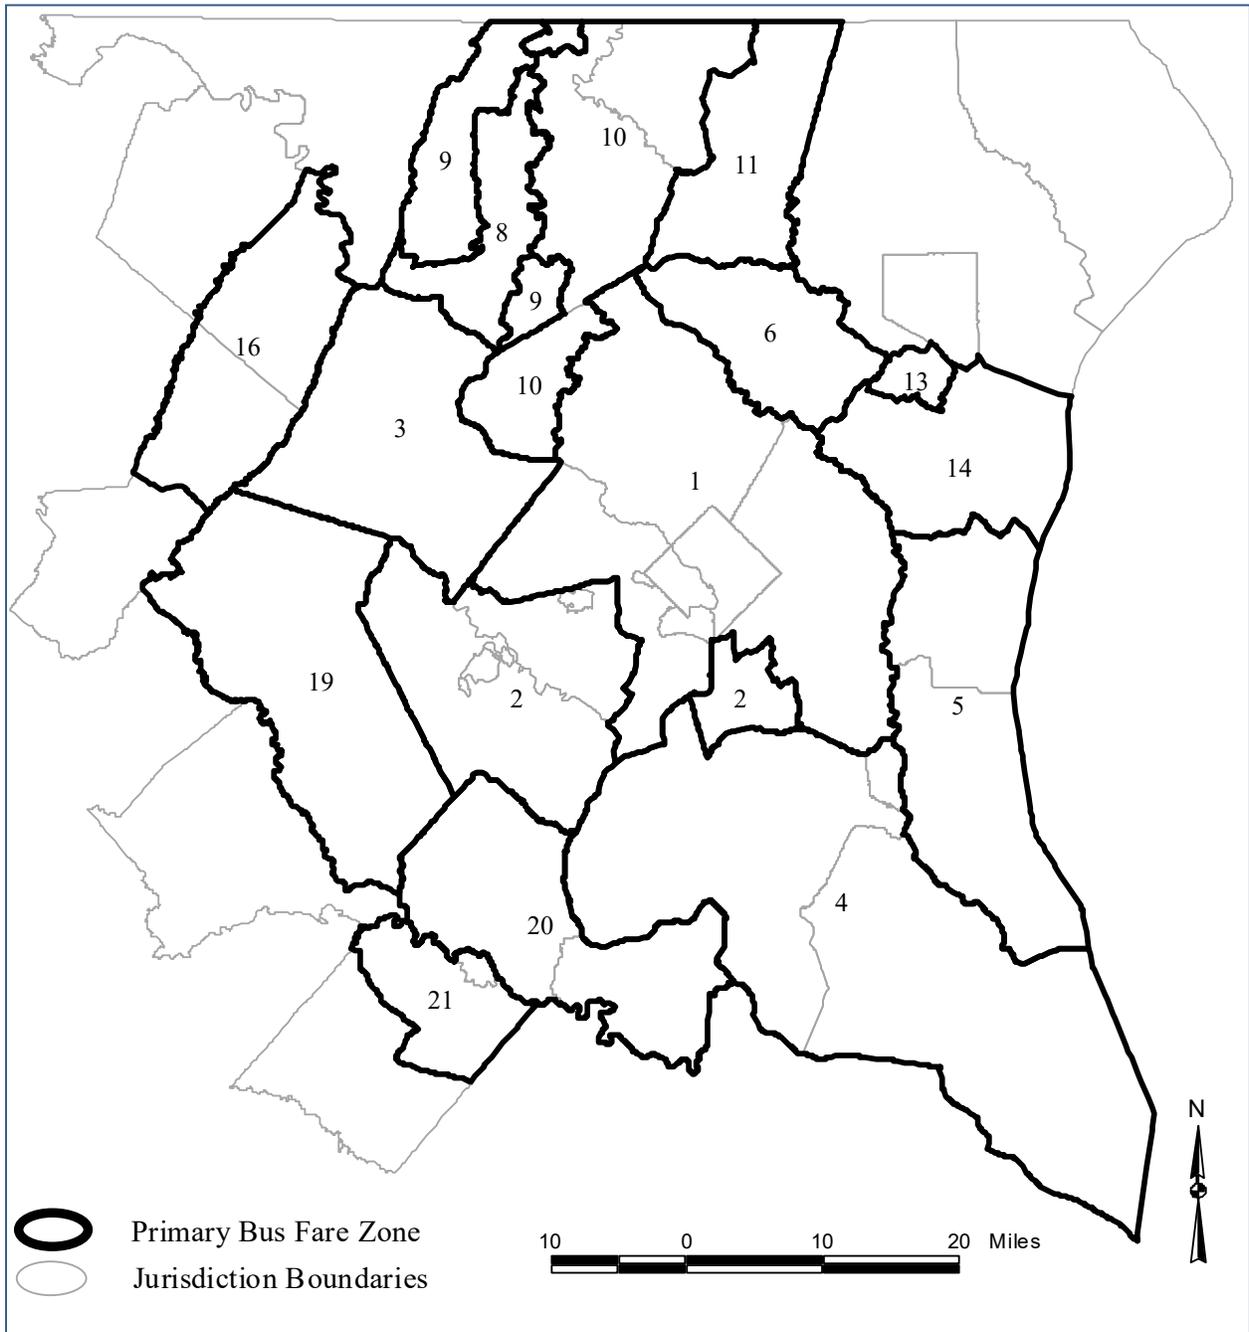


Figure 3-27 Regional Secondary Bus Fare Zone Map


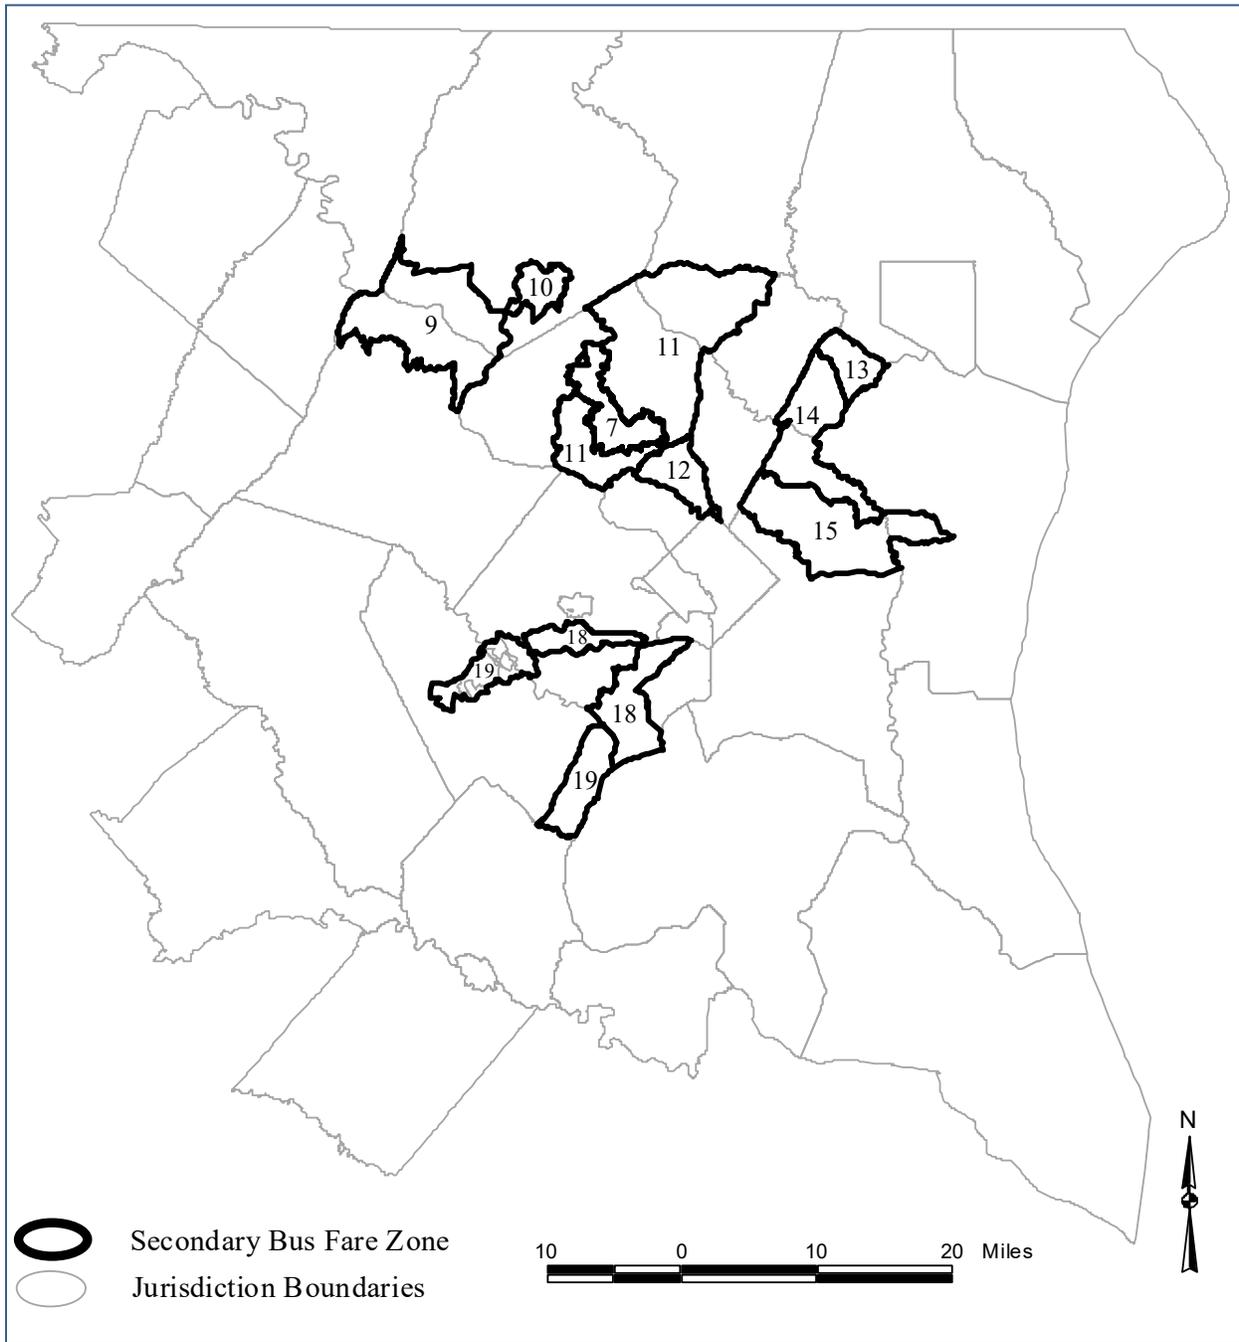


Figure 3-28 Combine bus fare zones (primary overlaid with secondary)-WMATA Tariff #45

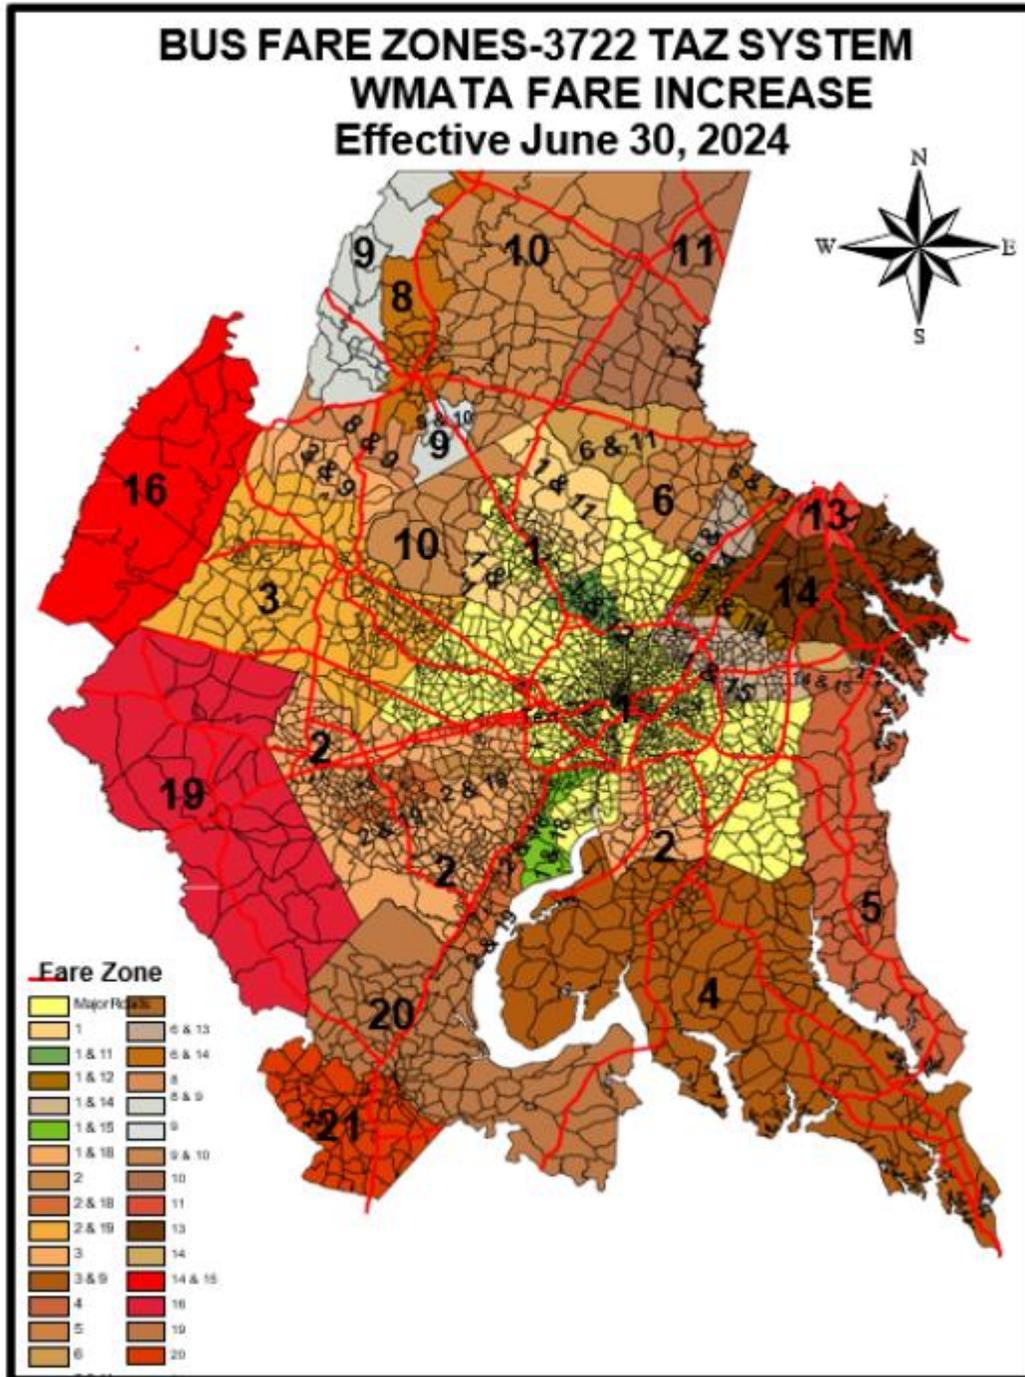

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\2024 Transit Fares Documentation for Visualize 2050.pdf"

When a TAZ is identified as being in more than one bus fare zone, the fare is calculated using the average fare for both zones. Additionally, each Metrorail station must be associated with a bus fare zone. These associations between bus fare zones and TAZs, and between bus fare zones and Metrorail

stations, are stored in the TAZ bus fare zone file (TAZFRZN.ASC), whose file format can be seen in Table 3-29.

**Table 3-29 File format: File relating bus fare zones to TAZs and Metrorail stations (TAZFRZN.ASC)**

Columns	Format	Field Description
<i>Zonal data (All lines in the file)</i>		
1-8	I4	TAZ Number (1-3,675) and Metrorail Station No. (1-150)
9-16	I4	1 <sup>st</sup> Bus fare zone 1 (currently numbered 1 to 21)
17-24	I4	2 <sup>nd</sup> Bus fare zone 2 (currently numbered 1 to 21)
<i>Metrorail station data (first 150 lines of the file only)</i>		
41-48	I4	1 <sup>st</sup> Bus Fare Zone (currently numbered 1 to 21)
49-56	I4	2 <sup>nd</sup> Bus Fare Zone (currently numbered 1 to 21)
57-64	I8	Jurisdiction code
65-72	I8	P discount
73-80	I8	A discount

The “bus” fare matrix is a 21-by-21 matrix that represents the average non-Metrorail-transit fares from one “bus” fare zone to another. In theory, there can be a separate bus fare zone for peak and off-peak travel. In practice, COG/TPB staff has adopted the practice of using only one bus fare matrix, since there is typically little time-of-day variation in the non-Metrorail transit fares. The current bus fare matrix is shown in Table 3-30. This table also provides names for the bus fare zones and changes since the 2022 Update to Visualize 2045 are shaded.

Table 3-30 AM Peak and Off-Peak Bus Fare Matrix between MWCOG Fare Zones (Expressed in 2024 cents)

**WMATA TARIFF #45  
BUS FARE MATRIX -2024**


	WMATA Regular Service	WMATA Express Ser. & Internal Metrobus Special Fare Service	Loudoun Comm. Bus	Charles & St. Mary's Comm. Bus (MTA)	Calvert and Southern AA Comm Bus (MTA)	Howard Comm. Bus (MTA)	Not Used Corridor Cities Transitway (Mont. Co)	Frederick Internal Bus	MARC Rail Brunswick (Frederick)	MARC Rail Brunswick (Mont. R8)	MARC Rail Brunswick (Mid. Mont)	MARC Rail Brunswick (Inner)	MARC Rail Penn/ Camden (Outer)	MARC Rail Penn/ Camden (Mid)	MARC Rail Penn/ Camden (Inner)	MARC Rail Brunswick (W.VA and Clark auto Connect)	VRE Zones 1 & 2 (Inside Beltway)	VRE Zones 3 & 4 (FFX and PW)	VRE Zones 5 & 6 (PW & FAUG Auto Connect)	VRE Zones 7 & 8 (Staff. & KG Auto Connect)	VRE Zone 9 (Spots. & Fred'brg)
Fare Zone	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
1	225	690	1000	489	464	425	560	430	583	491	430	368	491	430	368	857	424	515	607	696	765
2	690	113	1690	1179	1154	1115	1250	1234	1273	1181	1120	1058	1181	1120	1058	1547	584	225	0	311	378
3	1000	1690	100	1489	1464	1425	1560	1430	1583	1491	1430	1368	1491	1430	1368	1857	1424	1515	1607	1696	1765
4	489	1179	1489	0.50	953	914	1049	919	1072	980	919	857	980	919	857	1346	913	1004	1096	1185	1254
5	464	1154	1464	953	503	889	1024	894	1047	955	894	832	955	894	832	1321	888	979	1071	1160	1229
6	425	1115	1425	914	889	425	985	855	1008	916	855	793	916	855	793	1282	849	940	1032	1121	1190
7	560	1250	1560	1049	1024	985	130	710	710	594	130	516	1051	990	928	1417	984	1075	1167	1256	1325
8	430	1234	1430	919	894	855	710	0	0	580	580	580	921	860	798	671	854	945	1037	1126	1195
9	583	1273	1583	1072	1047	1008	710	0	600	580	580	580	1074	1013	951	671	1007	1098	1190	1279	1348
10	491	1181	1491	980	955	916	594	580	580	464	464	464	982	921	859	464	915	1006	1098	1187	1256
11	430	1120	1430	919	894	855	130	580	580	464	386	386	921	860	798	857	854	945	1037	1126	1195
12	368	1058	1368	857	832	793	516	580	580	464	386	309	859	798	736	857	792	883	975	1064	1133
13	491	1181	1491	980	955	916	1051	921	1074	982	921	859	464	464	464	1348	915	1006	1098	1187	1256
14	430	1120	1430	919	894	855	990	860	1013	921	860	798	464	386	386	1287	854	945	1037	1126	1195
15	368	1058	1368	857	832	793	928	798	951	859	798	736	464	386	309	1225	792	883	975	1064	1133
16	857	1547	1857	1346	1321	1282	1417	671	671	464	857	857	1348	1287	1225	800	1281	1372	1464	1553	1622
17	424	584	1424	913	888	849	984	854	1007	915	854	792	915	854	792	1281	424	492	584	674	742
18	515	225	1515	1004	979	940	1075	945	1098	1006	945	883	1006	945	883	1372	492	250	311	401	469
19	607	0	1607	1096	1071	1032	1167	1037	1190	1098	1037	975	1098	1037	975	1464	584	311	243	311	378
20	696	311	1696	1185	1160	1121	1256	1126	1279	1187	1126	1064	1187	1126	1064	1553	674	401	311	250	288
21	765	378	1765	1254	1229	1190	1325	1195	1348	1256	1195	1133	1256	1195	1133	1622	742	469	378	288	243

Fare has increased from the previous year

Source: WMATA Tariff #45, effective June 30, 2024.

In addition to MFARE1 and MFARE2, there are two other Cube Voyager scripts that are used in fare development: Prefarv23.s, Metrorail\_Skims.s. The entire automated fare development process, consisting of all four programs, is shown in Figure 3-29.

Figure 3-29 Process for developing zone-to-zone transit fares

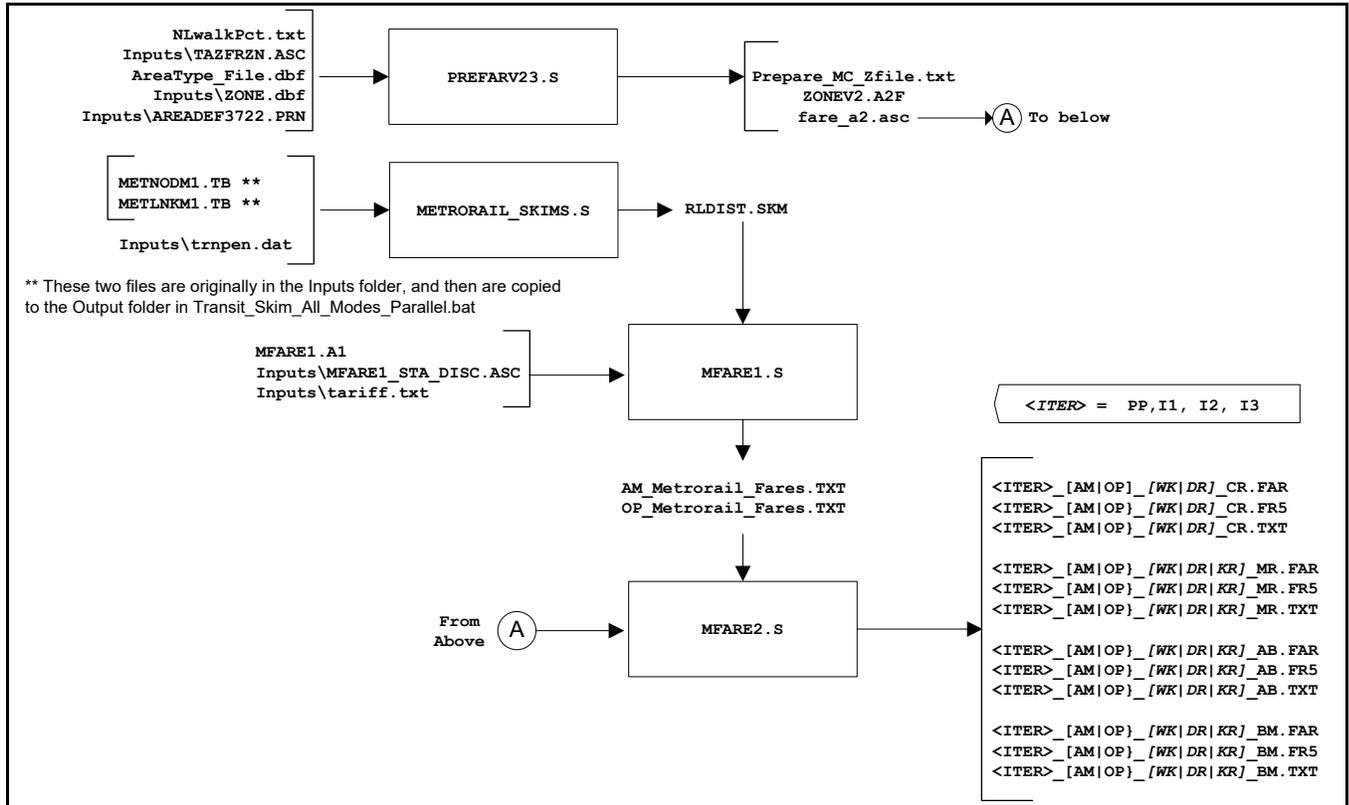

Ref: "I:\ateam\docum\FY20\Version23Development\travel\_model\_user\_guide\Ver2.3.78\_flowchart\_v1.vsd"

Ultimately, 22 fare matrices are developed by sub-mode, time-of-day period, and access type:

- Four sub-modes (Bus Only Metrorail only, Metrorail/ Bus, and Commuter Rail) by;
- Two time-of-day periods (peak and off-peak), by;
- Three access types (Walk, PNR, and KNR).

Since commuter rail access is distinguished by walk and auto access only (i.e., no differentiation between KNR and PNR), 22 matrices are developed (instead of the 24 implied above).

Table 3-31 lists the main transit fare input files. Chapter 17 of the latest travel model user’s guide also discusses the fare development process.

**Table 3-31 Listing of Transit Fare Input Files**

<b>Filename</b>	<b>Description</b>	<b>Type</b>	<b>Source</b>
tazfrzn.asc	Fare Zone File	Text	Analyst-generated
areadef3722.prn	Input TAZ-Mode choice district equivalence	Text	Analyst-generated
trnpen.dat	Metrorail network turn penalty file	Text	Analyst-generated
metlnkm1.tb	Metrorail links	Text	Geodatabase
metnodm1.tb	Metrorail nodes	Text	Geodatabase
mfare1_Sta_Disc.ASC	Metrorail Station fare discount array in cents	Text	Analyst-generated
tariff.txt	WMATA Transit fare (tariff) policy	Text	Analyst-generated
mfare1.a1	Metrorail station XYs scaled to 1/100ths of miles	Text	Geodatabase
BUSFARAM.ASC	AM bus fare matrix	Text	Analyst-generated
BUSFAROP.ASC	Off-peak bus fare matrix (same as AM)	Text	Analyst-generated

Ref: "i:\ateam\docum\fy14\2013LRTP\_Network\_Report\v23\_inputs\_v10.xlsx"

## 4 COG/TPB Multi-Year, Multi-Modal Unified Geodatabase

The network inputs to the TPB travel model are maintained and managed in a multi-year, multi-modal spatial database, implemented as a personal geodatabase (PGDB). While MWCOG is transitioning to an activity-based regional travel model (Gen3 Model) which adopts Cube Public Transport (PT) for transit modeling, COG/TPB staff will continue to support the Gen2 Model, which uses Cube TRNBUILD for transit modeling. In support of the network development activities associated with both Gen2 and Gen3 travel models, COG staff have developed the Unified network Geodatabase (UGDB), which combines TRNBUILD and PT networks in one database, and have been using it since 2021. The Unified Geo-Database (UGDB) interacts with a customized network editing program, known as COGTools, that runs within ArcGIS (currently Version 10.8). The COGTools application is developed to help with network editing tasks such as processing network data, exporting highway and transit network files in Cube Voyager or personal geodatabase formats, and generating dynamic layers (e.g., base network layer, travel direction layer and transit layer).<sup>28</sup> COGTools has also been updated recently to work with the UGDB.

This chapter starts with some background information on the geodatabase (GDB) and recent changes made to the geodatabase in terms of its design, structure, and operation. It then introduces the unified geodatabase (UGDB) and explains how it handles the differences between TRNBUILD and PT networks. This chapter also provides an overview of recent enhancements made to COGTools and a description of how TPB staff utilize digital, machine-readable transit information that is now publicly available to update the regional transit networks every year.

### 4.1 Unified Geodatabase Overview

TPB's transportation network unified geodatabase (UGDB) serves as a central repository for highway and transit network data. It is currently prepared in Microsoft Access format as a personal geodatabase and stores network data in a multi-modal (highway and transit) and a multi-year framework. The geodatabase includes spatial/geographic information that allows network elements (e.g., links and nodes) to be viewed and edited in the ArcGIS environment. The UGDB also includes link attribute data that is required by the Gen2 and Gen3 travel models. The use of a structured, time-series network geodatabase (GDB) offers several key advantages:

- Consistency in node and link geometry is enforced over time-series networks. Consistency in link attribute coding over time is also enforced.
- Transit network elements are integrated with highway elements in a relational database. Before the GDB existed, transit features were developed as independent text files that referenced the highway node system. The GDB combines transit and highway features so that they may be viewed (or mapped) as a complete system. The use of related tables means that edits to the

---

<sup>28</sup> Jim Yin, "COGTOOLS User Guide, Revision 4.0" (Washington, D.C.: Metropolitan Washington Council of Governments, National Capital Region Transportation Planning Board, May 2, 2022).

highway network result in updates to the associated transit network. This linkage is also available in Cube Base.<sup>29</sup>

- Consistency and accuracy of link screenline and jurisdiction codes are enforced over time. Using the GDB, screenlines and jurisdictional boundaries are represented as physical entities. The GDB then uses these physical entities and spatial operations to dynamically assign the appropriate jurisdiction and screenline code to each relevant link, thus reducing the likelihood of manual coding errors.
- The use of a geo-referenced database has greatly facilitated the incorporation of external data from partner agencies into the network development process. Most of the traffic counts, highway inventory data, observed speed data and transit routing information exists in some type of geo-referenced format.
- The recent development of the UGDB enables the user to maintain one unified geo-database and export network files in either TRNBUILD or PT format.

Some of the shortcomings of the current GDB approach include the following:

- The current geo-database does not allow the coding of multiple scenarios for the same network year. This is generally not a problem since the Air Quality Conformity (AQC) and other planning processes at COG usually do not involve multiple alternatives for a specific analysis year. But when they do, the network coding for additional alternatives must be handled outside the network database.<sup>30</sup>
- Edits to the highway network are propagated to the transit network in a limited way.
- Although highway networks can be generated for any year between the base and horizon year, transit networks must be coded for individual years and are typically available only for milestone years coded in the air quality conformity analyses.

The last two of these shortcomings are discussed in more detail later in the chapter.


TPB staff produces a new version of the multi-year GDB with each update of the LRTP, such that it reflects the project assumptions of the latest LRTP and TIP. The GDB is not developed from “scratch,” but rather, is typically developed using the GDB produced from the prior fiscal year (and the prior LRTP) as a starting point. The UGDB that combines TRNBUILD and PT networks has been used since 2021. A macro-scale view of the relationship between the UGDB and the COG/TPB travel model is shown in Figure 4-1. The figure indicates that the UGDB development occurs in the ArcGIS environment.

---

<sup>29</sup> See, for example, p. 590, “Consistency between highway and transit networks”, Citilabs, Inc., “Cube Base Reference Guide, Version 6.4.1” (Citilabs, Inc., September 30, 2015).

<sup>30</sup> Network development staff plan to investigate a work-around solution that could allow the geodatabase to handle multiple network scenarios for the same network year.

Figure 4-1 Relationship Between the network unified geodatabase and the Cube Voyager/PT Modeling Process

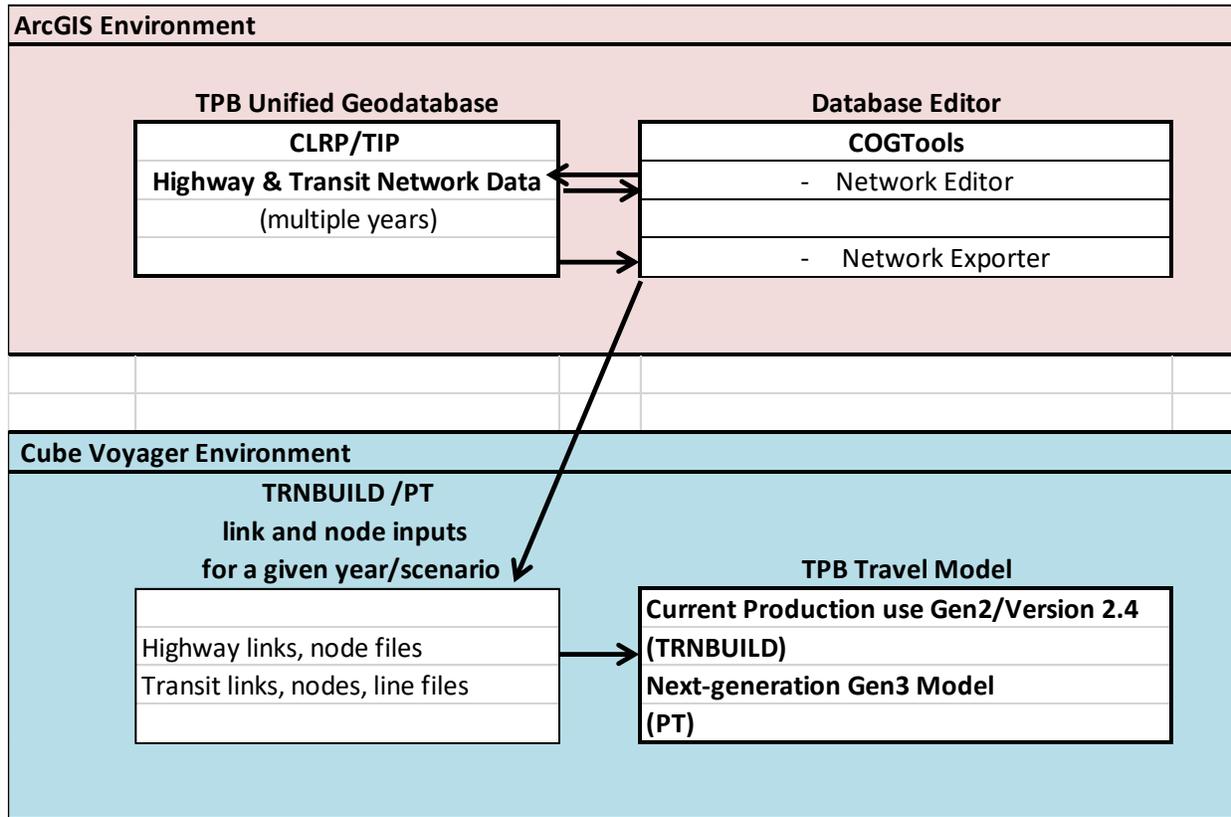

Ref: " I:\ateam\docum\FY22\Version2.4\_2022Uddate\_Visualize2045\_Network\_Report\Report Tables \chapter4\_overview\_process.xlsx"

As shown in Figure 4-1, the UGDB is maintained in ArcGIS and is not an integrated component of the current production use travel modeling environment, which makes use of Bentley Systems Cube software and is normally launched from a Windows command prompt. Currently, COG and its consultant are developing a new, activity-based model (ABM), to be known as the Gen3 Travel Model, which makes use of both ActivitySim software and Bentley’s PT software for transit modeling. The UGDB interacts with a customized and interactive program editor named COGTools. The program enables highway and transit network elements (nodes, links, and transit routes) in the database to be viewed and edited interactively. The editor is applied as an added “tool bar” within the standard ArcGIS graphical user interface. The COGTools application includes two primary functions: 1) the ability to edit (add, delete, or modify) network elements within the UGDB and 2) the ability to export year-specific network files from the UGDB in Cube TRNBUILD or PT format that can be read directly into the travel model. The COGTools application also enables customized viewing and mapping of the highway and transit features in the UGDB.

## 4.2 Difference between TRNBUILD and PT networks

To support Gen3 Model development process, COG staff combined both TRNBUILD and PT networks into one unified geo-database. While TRNBUILD and PT networks generally share transit links (modes 1-10) in the UGDB, their non-transit links are coded differently. The difference between the non-transit

links coded for TRNBUILD and PT networks is shown in Table 4-1.<sup>31</sup> The “Common” column indicates whether a group of links physically exist in both TRNBUILD and PT networks. If the “Common” column is checked as “N”, then the links exist in either TRNBUILD or PT. All “NA” values in the table correspond to a “blank” cell in the database.

Table 4-1 Comparison of Non-Transit Links Between TRNBUILD and PT Networks

Node Range		One Way/Two Way	Common	TRNBUILD	PT	FType	
A	B					TRNBUILD	PT
<=3722	>=15000	2	Y			0	0
>=15000	>=15000	2	Y			Various	Various
>=5001 and <=6999	>=20000	2	N	x		NA	NA
>=20000	>=11000 and <=13999	N/A	N			0	4
>=20000	>=8000 and <=10999	2	Y			0	4
>=13000 and <=13999	>=15000 and <=15999	1	N		X	NA	0
>=15000 and <=15999	>=20000	2	N		X	NA	4
>=8000 and <=8999	>=9000 and <=10999	2	Y			0	0
<=3722	>=8000 and <=9999	2	N		X	NA	0

The comparison in Table 4-1 indicates the following:

- Centroid connectors and highway links (the first two records in the table above) are found in both networks, and they share the same value for “FType”.
- Links between station dummy centroids (5001-6999) and highway nodes (>=20000, third row in table) are unique to TRNBUILD networks.
- Links between highway nodes (>=20000) and PNR nodes (11000-13999) are found in both networks, but they are two-way links in TRNBUILD vs. one-way links in PT.
- KNR drive-access links connecting highway nodes (>=20000) and rail stations (8000-10999) are common in both TRNBUILD and PT networks but have different “Mode” values; So are the pedestrian transfer links, which provide connections between Metrorail (8000-8999) and commuter rail (9000-9999) stations.
- In a PT network, there are unique links between highway nodes and bus PNR access stops (15000-15999) and between bus PNR lots (13000-13999) and corresponding bus PNR access stops.

<sup>31</sup> Jim Yin to Feng Xie. “Difference between TRNBUILD and PT Network,” Memorandum, September 1, 2020.

- Also, in a PT network, Mode 12 links are defined as walk-access links between a TAZ Centroid (1-3722) and a rail station (8001-9999).<sup>32</sup> The definition of Mode 12 links is different in a TRNBUILD network (as shown in Figure 3-23).

For PT networks, three unique attributes of “Speed”, “TRANTIME” and “WKTIME” are included in the exported highway network link file (link.dbf). All other link attributes that are not included in Table 4-1, such as “ATYPE”, “AMLANE”, “AMLIMIT”, etc., have the same values in both TRNBUILD and PT networks.<sup>33</sup>

As noted earlier, long haul transit links such as Metrorail links, commuter rail links, light rail links and BRT links are identical in both TRNBUILD and PT networks. However, in the exported link.dbf file, only the PT network include these long-haul transit links.

### 4.3 Update and Changes to the Database and/or COGTools

COGTools is a custom add-in application developed for ArcGIS that facilitates the management and editing of travel demand model networks. Integrated seamlessly into the ArcGIS environment, it offers an intuitive interface for transportation planners and modelers working on network-based modeling.

What sets the COGTools apart is its *living tool* nature – it is actively maintained and continuously improved based on user needs and feedback. Whether it’s bug fixes or the introduction of new features, the tool evolves dynamically to meet the ever-changing demands of transportation analysis.

To ensure transparency and collaboration, all updates, enhancements, and but fixes are tracked and documented on the project’s GitHub repository: <https://github.com/MWCOG/COGTools>. This approach encourages contributions and helps users stay informed about the tool’s development roadmap. The following table lists the major updates made to the COGTools application and its associated dabatabase.

---

<sup>32</sup> Yin. Memorandum to Xie, Moran, Seifu, et al. “Issues and Questions on the Development of a Year-2007 Transit Network in Cube Public Transport (PT) Format.” May 28, 2020.  
“I:\ateam\docum\FY20\memos\PT\_Memo2007\_findings\_Final.docx”

<sup>33</sup> In the exported transit line files, attribute name “FREQ” in TRNBUILD and “HEADWAY” in PT are different, although their values are the same:

- In TRNBUILD, **FREQUENCY** represents the number of transit vehicles operating per hour on a given route during a specified time period (e.g., AM Peak, Midday, PM Peak, Night).
- In PT, **HEADWAY** represents the time interval between consecutive vehicles, measured in minutes per run

Table 4-2 Updates made to the geodatabase and COGTools

#	Description	Type of Update	Further Detail and Benefit
1	EdgeID	Database/COGTools	EdgeID is a unique number in the network links table. It serves as a unique identifier of physical, non-directional links in the network database. In order to avoid duplicate values for EdgeID, the datatype of EdgeID was changed from integer to double and the value of EdgeID was developed as follows: $\text{EdgeID} = 1,000,000 * [\text{Node1}] + [\text{Node2}]$ , where [Node1] and [Node2] are the first and second nodes used when creating a non-directional link in the network database. For example, if we create a non-directional link by clicking Node 999 first and then Node 111, this link will have an EdgeID of 999000111, with [Anode]=999 and [Bnode]=111 in the baselink table.
2	“Static” attributes are created to hold the different values for TRNBUILD and PT (TMODE, PMODE, TFTType, PTFTType, etc)	Database/COGTools	During a network editing session in the UGDB, depending on the selected database format (PT or TRNBUILD), the “static” attributes will be copied to “dynamic” attributes and displayed in the ArcGIS map window.
3	Batch Update	COGTools	Batch Update function is useful to update multiple features at once. Updates were made to COGTools to resolve errors occurring in the UGDB when performing batch updates.
4	“Update Other direction” function	COGTools	A bug fix was made to the COGTools “Update Other direction” function which applies updates made on one direction of a link to the reverse direction as well.
5	Turn off the Automatic Loading of “NavMap” Layer	COGTools	COGTools was modified to turn off a map layer, “Nav_Map”, from loading automatically in the ArcGIS map window, because loading this layer slows down the network editing process. If interested, the user may turn on the layer manually. <sup>58</sup>

6	Keep multiple selected links in the highway network editor window, after editing a particular link and confirming the edit	COGTools	The COGTools “Edit Master Network” function, pops up the highway “Network Editor window” and enables the editing buttons on the COGTools toolbar. A user may select and load multiple links in the network editing window. However, formerly, after making edits to a particular link and selecting the “confirm” button, all the other selected links would disappear from the network editor window. Consequently, the COGTools “Edit Master Network” function was updated to keep all selected links in the Network Editor window after editing and confirming the update made to the particular link.
7	Permanently delete a Link from the Database	COGTools	A function was added in COGTools to permanently delete a link from the UGDB. Originally, COGTools could only retire a link, meaning the physical link remained in the GDB, but could be neither seen nor edited. Any retired link can be restored in the network geodatabase at any time. However, a permanently deleted link cannot be restored and thus this function must be performed with caution.
8	Four time-of-day (TOD) period transit services	Database/COGTools	In support of the ongoing Gen3 Model development, four time of day (TOD) transit networks are developed in the UGDB. The existing trip-based Gen2/Ver.2.4 Model requires transit network inputs in Cube TRNBUILD format for two TOD periods: AM Peak (7:00 AM - 7:59 AM) and Off-peak (10: 00 AM - 2:59 PM). The Gen3 Travel Model requires transit network inputs in Cube PT format for four TOD periods, AM peak (7:00 AM -7:59 AM), Midday (10 AM-2:59 PM), PM (4:00 PM – 4:59 PM) and Nighttime (7:00 PM – 11:59 PM). Note that, to continue to support the Gen2 Model, which requires network inputs for the “AM” and “OP” periods, the Midday period is labelled as “OP” instead of “MD” in the UGDB. The PT Export function of COGTools was also updated to export PT transit mode files from the network database for all four time periods. It should be noted that when network files are exported in TRNBUILD format for a Gen2 Model run, they are still exported in two time-of-day periods (“AM” and “OP”). <sup>59</sup>
9	Station Management	COGTools	A new module, “Station Management,” has been added to COGTools. Typically, new stations are created during a highway network editing session. Once a station is added, its basic information is automatically recorded in the database. The Station Management module allows users to edit all additional station attributes through an interactive user interface.

10	QA/QC	COGTools	<p>A new module, "QA/QC," has been added to COGTools to enhance the reliability of network data. Given the complexity of the network database, day-to-day editing by staff can inadvertently introduce logical errors into the network files. If these errors are present in files exported from the database and used as inputs for the travel demand model, they may lead to model crashes or inaccurate outputs. The QA/QC module systematically checks both highway and transit networks to ensure logical consistency. As a result, TRANBUILD and PT export files are now validated to prevent crashes during model runs and reduce the risk of erroneous results.</p>
11	GTFS data processing	COGTools	<p>A new module, "GTFS Process," has been added to COGTools to support the processing of GTFS data. This module includes two sub-modules: GTFS Schedule Extractor and Generate GTFS Shapefile. Every other year, staff collect GTFS data from transit operators to extract schedule and headway information for each transit route. This information is used to update the COG Unified Database.</p> <p>The GTFS Schedule Extractor streamlines this process by efficiently parsing GTFS data to extract relevant scheduling details. Users also have the option to export the extracted information in various formats based on their needs. Once the schedule data has been processed, users can utilize the Generate GTFS Shapefile sub-module to create ESRI ArcGIS-compatible shapefiles for visual presentation and further spatial analysis.</p>

#### 4.4 Unified Geodatabase COGTools

COGTools is used to edit the transportation network used by the regional travel model. COGTools has been updated to manage transportation networks in both the TRNBUILD and PT format in the UGDB. The updated COGTools allows the user to choose to open the geodatabase either in Cube TRNBUILD or Cube Public Transport (PT) format using the "Format" pull down menu on the unified geodatabase login Interface.<sup>34</sup> The "Format" attribute in the "Network Links" layer distinguishes between the PT network and the TRNBUILD network. COGTools filters the editable network features based on the choice of "Format". There are three values for "Format" attribute:

---

<sup>34</sup> Page 38, Jim Yin, "COGTOOLS User Guide, Revision 4.0" (Washington, D.C.: Metropolitan Washington Council of Governments, National Capital Region Transportation Planning Board, May 2, 2022).

- “C” for common links;
- “P” for PT only links; and
- “T” for TRNBUILD only links.

For example, if a PT network is selected to be viewed and edited, all ArcGIS features with “C” and “P” value will be displayed in the ArcGIS map window, but all ArcGIS features with “T” value in the “Format” attribute will be blocked from viewing and editing.

For each attribute that may assume distinct values on shared links between the PT and TRNBUILD networks, the UGDB schema defines two corresponding *static* fields—one for each format. For instance, the attribute FType is represented by PFTYPE for PT and TFTYPE for TRNBUILD. Upon opening the UGDB, COGTools determines the user’s selected network format and populates a shared *dynamic* attribute (FType) with the appropriate static value for display and editing within the ArcGIS interface. Any modifications made to the dynamic attribute during the network editing session are automatically written back to the format-specific static field (PFTYPE or TFTYPE). When exporting network files, COGTools references the selected format to extract values from the corresponding static attributes and writes them to the output files accordingly.

Before the Esri geodatabase/COGTools approach was adopted, TPB staff used a “master” network stored in ArcInfo to manage the highway networks. In 2004, TPB staff developed a process to perform batch updates on link attributes such as facility type and number of lanes. This process was known as “TIPUP,” i.e., TIP update process. It automatically read the PROJECTID, LANES, FACILITY TYPE, and YEAR values listed in the air quality conformity project inputs table and updated those variables in the highway network database, thus saving a significant amount of staff time when updating networks for a new air quality conformity analysis cycle. In 2009, this process was revised and re-named as “PrepTIP,” i.e., prepare TIP batch update program.<sup>35</sup> After transitioning to the UGDB, the COGTools batch update function was modified to update multiple features at the same time.

Following the batch update, manual edits are typically made to fine-tune network updates using the COGTools toolbar. Highway editing functions include the ability to:

- Add new facilities in two alternative ways:
  - Copy the link from a HERE street centerline file and add it to the geodatabase<sup>36</sup>, or
  - Manually draw the link on the screen via a mouse or other pointing devices
- Split highway links (by inserting a node on an existing highway link)
- Retire highway links
- Edit highway link attributes
- Permanently Delete a Link from the Database

---

<sup>35</sup> Robert Snead, Charlene Howard, and Jane Posey, “Highway Network Database Batch Updates: PrepTIP Program,” Memorandum, March 11, 2009.

<sup>36</sup> To use this functionality, a HERE data layer must be present in the editing window. In the future, we hope to enhance this function to improve the user experience.

The toolbar also includes the following transit editing capabilities:

- Add a transit route
- Copy a transit route
- Delete a transit route
- Modify an existing transit route alignment (represented as a series of nodes)
- Edit transit route attributes

The COGTools design dynamically implements transit network changes in response to highway edits, albeit in a limited capacity. For example, when a highway network link is split, the affected transit route(s) are dynamically modified to include the added node within the existing route alignment.<sup>37</sup> If a highway network link is deleted, the affected transit route(s) are not modified, although the user is prompted to manually reconfigure the transit route. Also, only existing transit years in the geodatabase at the time of the highway edit are affected by transit edits. The transit editing tool is designed to identify transit routing errors, including cases where there are discontinuities in the node string and cases where the transit route is coded in a manner that is inconsistent with the highway link directionality.

The current COGTools application manages highway network editing within a multi-year framework. Edits to both highway and transit are tied to a specific network year, as indicated by a “year” attribute on each link. For example, in the ongoing Visualize 2050 update – part of the Long-Range Transportation Plan (LRTP) – highway networks were developed for six milestone years: 2025, 2026, 2030, 2040, 2045 and 2050. While these serve as key reference years, COGTools can generate the highway networks for any year between the base year and horizon year by applying all relevant edits up to that point.

Highway edits made for a specific year (e.g., 2025) are carried forward for all subsequent network years, including both milestone and intermediate years. In contrast, transit networks are developed individually for each milestone year. As a result, the system does not currently support propagating transit changes from one milestone year to subsequent years. However, all developed transit years are stored collectively within the UGDB.

The COGTools toolbar also allows for exporting year-specific files from the UGDB to network input files that are directly used by the travel model. The exporting process is performed separately for highway files and transit files. The highway export may be performed for any year and one of the following two formats may be selected:

- 1) *CUBE-Voyage DBF, Personal Geodatabase or PT Network DBF, or*
- 2) *Personal geodatabase (link and node feature classes).*

---

<sup>37</sup> This capability is also available in the Bentley Systems Cube Base graphical network editor, provided the user has both the highway and transit networks open at the same time.

The first format is designed to export network link and node files, in DBF file format, for any year specified by the user (i.e., any milestone or non-milestone year between the base year and the horizon year). The files exported comply with the input file format required by the Gen2/Version 2.4 or Gen3 Travel Model. The second format may be used to export highway network line and point feature classes from the geodatabase and to build a highway network (\*.net) in Cube Base, using the GIS tools module in Cube Base (“Build highway network from a feature class / shapefile”).

The highway exporting function includes the following features:

- It assigns link distances that reflect HERE/NAVTEQ centerline “true shape” lengths. Link distances are converted from feet to whole miles with an explicit decimal.
- It assigns jurisdiction codes to the highway network links based on the jurisdictional boundary shapes. Jurisdictional boundaries are included as a feature class in the network geodatabase. Highway links are associated with jurisdictions based on the midpoint of the link relative to jurisdictional boundaries.
- It assigns screenline codes to all highway network links that intersect the screenline feature class/layer that is contained in the network geodatabase.

The transit exporting function generates transit link, node and route/line files for a transit year included in the database in either TRNBUILD (\*.TB) or PT (\*.LIN) format. In the UGDB, the transit files for the Gen2/ Version 2.4.6 Travel Model are stored in TRNBUILD format by two TOD periods AM (7:00 AM-7:59 AM) and OP (10:00 AM- 2:59 PM). For the Gen3 Travel Model, on the other hand, transit network files are stored in PT format by four TOD periods: AM (7:00 AM-7:59 AM), OP (10:00 AM- 2:59 PM), PM (4:00 PM – 4:59 PM), and NT (7:00 PM – 11:59 PM).


#### 4.5 Unified Geodatabase Tables: Overview and Highway Network Tables

A more detailed view of the tables that exist within the UGDB structure is shown in Figure 4-2. The UGDB is a collection of related MS Access tables that are of two general types: geometric network tables and logical network tables.<sup>38</sup> The geometric network consists of two “feature class” tables: a network links table and a network nodes table. The two tables contain basic attributes of links and nodes in the transportation network, and geographic information that is necessary for displaying network features on a map.

---

<sup>38</sup> See, for example, Esri, “Essential Geometric Networks Vocabulary,” ArcMap Documentation, 2021, <https://desktop.arcgis.com/en/arcmap/latest/manage-data/geometric-networks/essential-geometric-networks-vocabulary.htm>; OR Esri, “What Are Geometric Networks?,” ArcMap Documentation, 2021, <https://desktop.arcgis.com/en/arcmap/latest/manage-data/geometric-networks/what-are-geometric-networks-.htm>.

Figure 4-2 TPB Unified Geodatabase Structure

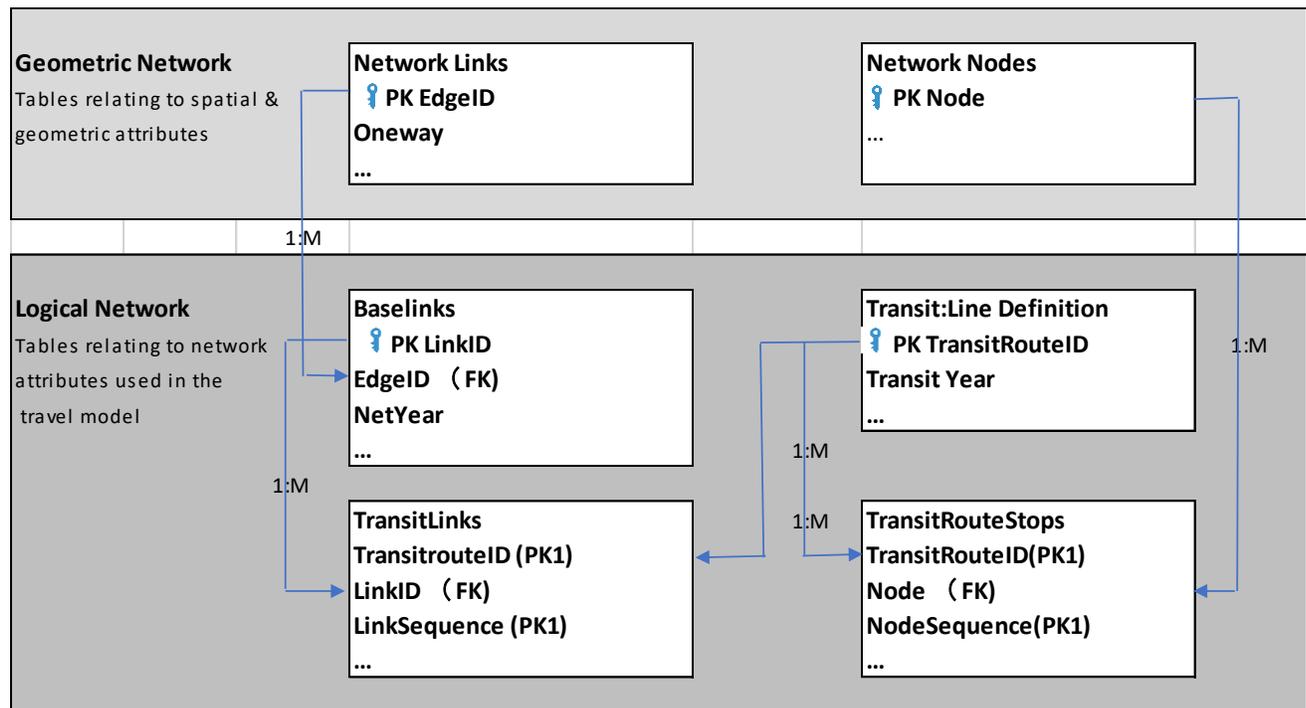

Ref: " I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables\GDB\_Structure.xlsx"

In Figure 4-2, “PK” means “primary key” and “FK” means “foreign key,” as described below. The geodatabase is a relational database, which means that it is a database composed of tables (“relations”). Tables can be related to each other, in which case, there is a minimum and maximum number of elements allowed on each side of the relationship, known as the minimum and maximum cardinality. In general, the maximum cardinality values can be 1:1 (one-to-one), 1:M (one-to-many), M:1 (many-to-one), and N:M (many-to-many). Minimum cardinalities (not shown in Figure 4-2) are typically zero (optional) or one (mandatory). Additionally, tables are normally set up to contain only unique records (no duplicates). A key value is a variable that uniquely defines a record in a table. Since there can be more than one variable that can serve as a key, each of these variables is called a candidate key. Normally, one of the candidate keys is chosen as the primary key (PK). If a database is stored in a database management system (DBMS), normally the DBMS enforces “entity integrity” (e.g., no duplicate rows allowed) and “referential integrity” (ensure that minimum and maximum cardinalities are obeyed). Although COGTools is essentially a spatial DBMS, it enforces neither entity integrity nor referential integrity. Nonetheless, it can still be useful to show which variables are the primary and foreign keys. For example, when two tables have a 1:M relationship, the first table is called the parent, and the other table is called the child. In the case of a 1:M relationship, the primary key of the parent table is placed inside the child table as a foreign key. In some cases, a key is composed of two or more variables, in which case the key is called a composite key.

In Figure 4-2, there is a 1:M relationship between the “Network Links” table and the “BaseLinks” table, so the primary key of the “Network Links” table (EdgeID) is placed as a foreign key in the “Baselinks”

table. Note that both the “TransitLinks” table and the “TransitRouteStops” table have a composite key (labeled as PK1), which is composed of two variables: TransitRouteID and LinkSequence.

The network links attributes are shown in Table 4-3. Two notes about Table 4-3: First, the attribute RouteName is a placeholder and is currently blank. In the future, it is hoped to populate this attribute with actual link (road segment) names. Second, the information in the table about the oneway flag attribute may seem counter-intuitive: Namely, “1” indicates a two-way link and “2” indicates a one-way link. The network node table attributes are shown in Table 4-4.

In contrast, the logical network is a group of tables that contain travel model-related attributes associated with the links and nodes. The logical network consists of four tables:

1. Base Links: Highway and transit network link attributes (see Table 4-5).
2. Transit Links: Transit network-related links (see Table 4-6).
3. Transit Route Stops: Transit route alignments, expressed as a network node sequence (see Table 4-7).
4. Transit Line Definition: The transit line attributes (see Table 4-8).

The highway network is composed of geometric elements from the network links and network node tables and logical network elements from the Baselinks table. The EdgeID variable in the network links table is a unique number that identifies each physical (geometric) link. It does not vary by direction or network year. As noted earlier, as shown in Figure 4-2, the EdgeID variable is the primary key field that relates the geometric and logical highway networks. The relationship between the geometric network and the logical network is one to many (1:M). That is, each record/link in the geometric network (Network Link feature class table) may correspond to one, or many records/links in the logical network (Base Links table). Entries in the logical network represent link records in different network years.

In the logical network, LinkID is a unique number assigned to identify links by direction and transit year. It is a primary key variable that relates the logical network base links table and transit links table. The relationship between logical links and transit links is also one to many (1:M). That is, each logical network link may correspond to zero, one, or many transit links.

In the transit network, TransitRouteID is a unique number assigned to identify transit routes for different transit years in the TransitLineDefinition table. It is the primary key variable that relates the TransitLinks and TransitRouteStops tables. The relationship between TransitLineDefinition and transitLinks/TransitRouteStops is one to many (1:M).

In the geometric network, the Network Nodes feature class mainly provides the geographic location of transportation facilities, such as transit stations, bus stops, park-and-ride lots, intersections, and zone centroids. Node is the unique numerical ID and functions as the primary key that relates the geometric network and the logical network, i.e., the nodes feature class table and the base links table.

Table 4-3 Network Links Feature Class table with "Link Type" codes (1-16) description

Field Name	Data Type	Description
OBJECTID	Long Integer	Geodatabase record identifier
Shape	N/A	Geodatabase geometry field
EdgeID	String	Geometry network link identifier (Pair node sequence)
LinkType	Long Integer	Link type code:
		1. Highway Link
		2. Bus Link
		3. TAZ Connector
		4. Metrorail Link
		5. Commuter Rail Link
		6. Light Rail Link
		7. Light Rail to Bus
		8. Metro Station to Bus Stop
		9. Commuter Station to Bus Stop
		10. Metro PNR to Station
		11. Commuter PNR to Station
		12. Bus PNR to Bus Stop
		13. Light PNR to Station
		14. BRT/Street Link
		15. BRT/Street PNR to Station
		16. BRT/Street to Bus
		17. Hwy to Metro PNR
		18. Hwy to COMM PNR
		19. Hwy to LRT PNR
		20. Hwy to Metro KNR
		21. Hwy to COMM KNR
		22. Hwy to LRT KNR
23. BusPNR-to-BusSta		
ANode	Long Integer	A Node
BNode	Long Integer	B Node
FunctionClass	Long Integer	Link facility type code (0 - 6) <i>0/centroids, 1/Freeways, 2/Major Art., 3/Minor Art, 4/ Collector, 5/ Expressway, 6/ Ramp</i>
Format	String	"C" - Common Link, "P"- PT Link Only, "T" - TRNBUILD Link Only
Oneway	Integer	One-way or two-way link code: 1= two-way and 2= one-way
RampFlag	Text	RampFlag is sometimes populated with "P" and represents updates to perpendicular links of the facility being updated for some projects. This is used in the PrepTIP process—the links with RampFlag=P have the year

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Field Name	Data Type	Description
		updated, but not the number of lanes or facility type of the project with which they are associated.
RouteID	Long Integer	(Not Used)
RouteName	Text	Facility name (place holder field, not currently populated)
UpdateBy	Text	Person's name updating the geodatabase
Screen	Long Integer	Screenline Code (1-38)
JUR	Integer	Jurisdiction code (0 -23): <i>0/dc, 1/mtg, 2/pg, 3/alr/, 4/alx,5, ffx, 6/ldn, 7/ pw, 8/(unused), 9/frd, 10/how, 11/aa, 12/chs, 13/(unused), 14/car, 15/cal, 16/stm, 17/kg, 18/fbg, 19/stf, 20/spts, 21/fau, 22/clk, 23/jef</i>
Length	Double	Link Length in feet
Shape_Length	Double	ArcGIS auto-generated geometry length "true shape" in feet

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables \gdb\_tables\_Rev4-4-2022.xlsx"

Table 4-4 Network Nodes Feature Class table with "Node Type" codes (1-13) description

Field Name	Data Type	Description
OBJECTID	Long Integer	Geodatabase record identifier
Shape	N/A	Geodatabase geometry field
Node	Long Integer	Node numbers
NodeType	Long Integer	Node type code: 1= Highway Node 2= Bus Node 3= TAZ Centroid 4= Metrorail Node 5= Commuter Rail Node 6= Light Rail Node 7= Light Rail Parking Lot Node 8= Metro Parking Lot Node 9= Commuter Parking Lot Node 10= Bus PNR Node 11=BRT Street PNR 12= BRT Street Node 13= Station Dummy Centroid Node
Jur	Text	Jurisdiction code (0 - 23) <i>0/DC, 1/MTG, 2/PG, 3/ALR/, 4/ALX,5, FFX, 6/LDN, 7/PW, 8/(unused), 9/FRD, 10/HOW, 11/AA, 12/CHS, 13/(unused), 14/CAR, 15/CAL, 16/STM, 17/KG, 18/FBG, 19/STF, 20/SPTS, 21/FAU, 22/CLK, 23/JEF</i>
UpdatedBy	Text	(Not Used)

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Field Name	Data Type	Description
X_COORD	Double	X coordinate of a node (MD State Plane, NAD83, feet)
Y_COORD	Double	Y coordinate of a node (MD State Plane, NAD83, feet)
Name	Text	TransitStop/Station Name
NetYear	Long Integer	The year the network node becomes active in the database

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables\gdb\_tables\_Rev4-4-2022.xlsx"

Table 4-5 Base Links Table with "Mode" codes (1-16) description

Field Name	Data Type	Description
OBJECTID	Long Integer	Geodatabase record identifier
LinkID	Long Integer	Logical network link Identifier
EdgeID	Long Integer	Geometry network link identifier
ANode	Long Integer	A Node
BNode	Long Integer	B Node
StreetName	Text	Street Segment Name
NDPR2	Text	Combination of Anode and Bnode (Not Used)
BaseYear*	Long Integer	Year 2000 or Year 2001
TravelDirection	Text	(Not Used)
Distance	Double	Link distance in miles (X.XX)
LinkType	Long Integer	Link type code (1-24) (Dynamic)
PLinkType	Long Integer	Link type code (1-24) (PT Network)
TLinkType	Long Integer	Link type code (1-24) (TRNBUILD Network)
Mode	Long Integer	Mode Code (1-16): (Dynamic) 1= Local Metrobus 2= Express Metrobus 3= Metrorail 4= Commuter Rail 5= Light Rail 6= Other primary - Local bus 7= Other primary - Express bus

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Field Name	Data Type	Description
		8= Other secondary - Local bus 9= Other secondary – Express bus 10= Bus Rapid Transit or Streetcar 11= Drive Access link 12= Bus-to-rail Transfer link 13= Walking link 14= (Not Used) 15= PNR-to-Rail station/Bus stop 16= Zonal Access or Egress
PMODE	Long Integer	Mode Code (1-16): (PT Network)
TMODE	Long Integer	Mode Code (1-16):(TRNBUILD Network)
TOLL	Integer	Toll value in current year dollars
TollGrp	Long Integer	Toll Group code (1- 9999)
FType	Long Integer	Link facility type code (0 - 6) (Dynamic) <i>0/Centroids, 1/Freeways, 2/Major Art., 3/Minor Art, 4/ Collector, 5/ Expressway, 6/ Ramp</i>
PFType	Long Integer	Link facility type code (0 - 6) (PT Network)
TFType	Long Integer	Link facility type code (0 - 6) (TRNBUILD Network)
LType	Text	Link type: <i>H=Highway links, T=Transit only links, and Z=TAZ connector</i>
AType	Long Integer	Area type code (1 -6)
<Period> Lane	Long Integer	<Period> number of lanes
<Period> Limit	Long Integer	<Period> limit code (0 - 9)
Screen	Long Integer	Screenline code
NetYear	Long Integer	The year the network link becomes active in the database
ProjectID	Text	Project identifier
ZoneID	Long Integer	TAZ centroid identifier (1-3,722)
Status	Long Integer	Link status code: <i>1= Active and 2= Retired</i>
COGStatus	Text	(Not Used)
UpdateDate	Text	The date and time of link attributes update
Jur		Jurisdiction code (0 - 23)

Field Name	Data Type	Description
	Long Integer	0/DC, 1/MTG, 2/PG, 3/ALR/, 4/ALX,5, FFX, 6/LDN, 7/ PW, 8/(unused), 9/FRD, 10/HOW, 11/AA, 12/CHS, 13/(unused), 14/CAR, 15/CAL, 16/STM, 17/ KG, 18/FBG, 19/STF, 20/SPTS, 21/FAU, 22/CLK, 23/JEF
Count	Long Integer	(Not Used)
Speed	Double	Dynamic
PSpeed	Double	(PT Network)
TSpeed	Double	(TRNBUILD Network)
<b>Key</b>		
<Period> =	AM	AM peak period (7:00 AM -7:59 AM)
	PM	PM (4:00 PM – 4:59 PM)
	OP	Off-peak period (10:00 Am - 2:59 PM)
	NT	NT (7:00 PM – 11:59 PM)
BaseYear*	2000	Links entered into the database by DCI when first developed
	2001	Links subsequently entered into the database by DTP staff

#### 4.6 Unified Geodatabase Tables: Transit Network Tables

In the logical network, the transit network is represented by the following three tables:

1. Transit Links: Maintains the attributes of the transit network links.
2. Transit Route Stops: Consists of all transit connection points including bus stops, transit stations, and park-and-ride lots.
3. Transit Lines Definition: Contains year-specific transit data for each transit route.

The TransitRouteID variable is a primary key in the “Transit Line Definition” table and a foreign key in the “Transit Links” table and “Transit Route Stops” table. Thus, as shown in Figure 4-2, it links these three tables together. Attributes maintained in the Transit Links, Transit Route Stops, and Transit Lines Definition tables are shown in Table 4-6, Table 4-7, and Table 4-8, respectively.

Table 4-6 Transit Links Table

Field Name	Data Type	Description
ObjectID	Long Integer	Geodatabase record identifier
LinkID	Double	Logical network link identifier
TransitRouteID	Long Integer	Transit Route identifier
ANode	Double	A Node
BNode	Double	B Node
LinkSequence	Double	Sequence number of links that form a transit route
Scenario	Text	Project identifier
TransitYear	Double	Specific year of the transit route
SYear	Double	Year project is open for use
Operation	Double	Operation time code: 1= AM peak (7:00 AM -7:59 AM), 2= off-peak (10 AM-2:59 PM), 3= PM (4:00 PM – 4 :59 PM) and 4= NT (7:00 PM – 11:59 PM)

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables \gdb\_tables\_Rev4-4-2022.xlsx"

Table 4-7 Transit Route Stops Table

Field Name	Data Type	Description
ObjectID	Long Integer	Geodatabase record identifier
TransitRouteID	Long Integer	Transit Route identifier
Node	Long Integer	List of nodes used by a transit route
NodeSequence	Long Integer	Sequence number of nodes on a specific transit route
Operation	Long Integer	Transit operation period code: 1= AM peak (7:00 AM -7:59 AM), 2= off-peak (10 AM-2:59 PM), 3= PM (4:00 PM – 4 :59 PM) and 4= NT (7:00 PM – 11:59 PM)
StopFlag	Integer	Transit stop or non-stop code: 0= Stop and 1= Non-Stop
SourceYear	Long Integer	Base year from which transit route is derived
SYear	Long Integer	Year project is open for use
Scenario	Text	Project identifier
TransitYear	Long Integer	Specific year of the transit route

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables \gdb\_tables\_Rev4-4-2022.xlsx"

Table 4-8 Transit Lines Definition Table

Field Name	Data Type	Description
ObjectID	Long Integer	Geodatabase record identifier
TransitRouteID	Long Integer	Transit Route identifier
TransitRouteName	Text	Transit Route name
OriginNode	Long Integer	Origin-of-transit-route stop node identifier
DestinationNode	Long Integer	End-of-transit-route stop node identifier
OriginNodeName	Text	Origin transit line station name e.g. Shady Grove Station
DestiNodeName	Text	End-of-the line station name e.g. Glenmont Station
Oneway	Long Integer	One-way or two-way route code: 1= two-way and 2= one-way
Mode	Long Integer	Mode Code: 1= Local Metrobus 2= Express Metrobus 3= Metro Rail 4= Commuter Rail 5= Light Rail 6= Other primary - Local bus 7= Other primary - Express bus 8= Other secondary - Local bus 9= Other secondary – Express bus 10= Bus Rapid Transit or Streetcar 11= Drive Access link 12= Bus-to-rail Transfer link 13= Walking link 14= (Not Used) 15= PNR-to-Rail station/Bus stop 16= Zonal Access or Egress
Headway	Double	Transit vehicle headway (in mins.)
Runtime	Long Integer	Transit route running time (in mins.)
Operation	Long Integer	Transit operation period code: 1= AM peak (7:00 AM -7:59 AM), 2= off-peak (10 AM-2:59 PM), 3= PM (4:00 PM – 4 :59 PM) and 4= NT (7:00 PM – 11:59 PM)
SourceYear	Long Integer	Base year from which transit route is derived
Scenario	Text	Project identifier
TransitYear	Long Integer	Specific year of the transit route
SYear	Long Integer	Year project is open for use
RunSpeed	Long Integer	(Not Used)
LineDistance	Long Integer	(Not Used)
Operator	Text	Transit operator / owner name, e.g. WMATA

Ref: "I:\ateam\docum\fy22\Version2.4\_2022Update\_Visualize2045\_Network\_Report\Report\_Tables \ gdb\_tables\_Rev4-4-2022.xlsx"

## 4.7 General Transit Feed Specification (GTFS) Data

To support development of the Gen3 Model which uses Cube PT and simulates four time of day (TOD) periods in transit modeling, it was necessary for network staff to code four TOD transit services in the current UGDB. In the database, the existing two TOD periods (“AM” and “OP”) are kept the same to support the Gen2/Ver. 2.4.6 Model, which simulates only two TOD periods in transit modeling. Two additional time periods (“PM” and “NT”) were processed and added to the UGDB. One of the standard procedures in the network development process for a regular update of the long-range transportation plan is an update of the base-year transit network line files. The base-year transit network is the starting point for developing all future-year transit networks. The update generally involves:

- 1) Ensuring that the transit lines reflect the most up-to-date run times and service frequencies.
- 2) Checking whether individual transit lines have been added or removed.

The regional travel model require two variables for each transit route: Average run time and average headway, both in minutes. In the past, the update was done using paper or electronic route schedules published by the transit operators. In the late 1990s, the larger transit operators, such as WMATA and Ride-On, provided some digital, machine-readable schedule data that could be used to calculate average run times and frequencies (headways) for each of the two time-of-day periods (peak and off peak).<sup>39 40</sup> In 2005, Google and Portland's TriMet transit agency developed an electronic data format for incorporating transit data into online maps. The format was initially known as “Google Transit Feed Specification” (GTFS). Over the next few years, this standard became the default format for sharing public transit scheduling information, and later, the name was changed to “General Transit Feed Specification” (also GTFS). A GTFS feed is a collection of comma-separated (CSV) files that represents a public transit system's schedules and transit route itineraries. Each file contains an aspect of transit service, including stops, routes, trips, and other schedule data. The GTFS specification is defined by the series of files shown in Table 4-9. With the availability of the GTFS scheduling data, COG staff currently extract the scheduling information for about 90% of the regional transit services from GTFS. The information for the remaining 10% of transit services is derived based on their paper or electronic schedules. While the scheduling information for the existing two TOD periods (“AM” and “OP”) remain the same, those for the two additional time periods (“PM” and “NT”) were processed and added to the COG network database.<sup>41</sup> Given the manual effort involved, the transit line updating process is easily one of the most onerous network development tasks.

---

<sup>39</sup> Mark S. Moran, “Using Electronic Files from WMATA to Calculate Average Headways and Run Times for 1998 WMATA Bus Service,” Internal Report (Washington, D.C.: Metropolitan Washington Council of Governments, February 18, 1999).

<sup>40</sup> Mark S. Moran, “Fall 1999 Ride On Bus Schedule Data: Using SAS to 1) Calculate Average Headways and Run Times and 2) Determine Which Routes Are Eligible for Coding as Two-Way Routes,” Internal Report (Washington, D.C.: Metropolitan Washington Council of Governments, October 20, 1999).

<sup>41</sup> Jim Yin to Feng Xie “Development of Transit Networks for four Time of Day (TOD) Periods in the MWCOG Unified Network Database,” Memorandum, April 7, 2022.

Table 4-9 GTFS files

Filename		
<u>agency.txt</u>	Required	One or more transit agencies who provide the data in this feed.
<u>stops.txt</u>	Required	Individual locations where vehicles pick up or drop off passengers.
<u>routes.txt</u>	Required	Transit routes. A route is a group of trips that are displayed to riders as a single service.
<u>trips.txt</u>	Required	Trips for each route. A trip is a sequence of two or more stops that occurs at specific time.
<u>stop_times.txt</u>	Required	Times that a vehicle arrives at and departs from individual stops for each trip.
<u>calendar.txt</u>	Required	Dates for service IDs using a weekly schedule. Specify when service starts and ends, as well as days of the week where service is available.
<u>calendar_dates.txt</u>	Optional	Exceptions for the service IDs defined in the calendar.txt file. If calendar_dates.txt includes ALL dates of service, this file may be specified instead of calendar.txt.
<u>fare_attributes.txt</u>	Optional	Fare information for a transit organization's routes.
<u>fare_rules.txt</u>	Optional	Rules for applying fare information for a transit organization's routes.
<u>shapes.txt</u>	Optional	Rules for drawing lines on a map to represent a transit organization's routes.
<u>frequencies.txt</u>	Optional	Headway (time between trips) for routes with variable frequency of service.
<u>transfers.txt</u>	Optional	Rules for making connections at transfer points between routes.
<u>feed_info.txt</u>	Optional	Additional information about the feed itself, including publisher, version, and expiration information.

As noted above. GTFS information in the Washington, D.C. region is available for about 90% (87% to be specific) of the existing transit routes. As shown in Table 4-10, 14 of the 36 transit service providers included in the regional transit network currently post GTFS information. Although only about one third of transit agencies provide transit schedules in GTFS format, the 87% figure arises from the fact that the larger transit agencies (like WMATA and Ride-On) tend to offer GTFS data, whereas the smaller agencies tend not to offer GTFS data.

Highway and Transit Networks used in the Air Quality Conformity Analysis of Visualize 2050 and the FY 2026-2029 TIP (Gen2/Ver. 2.4.6 Travel Model)

Table 4-10 Availability of GTFS data for transit providers in the Washington, D.C. area (TPB modeled area)

Seq. No.	Transit Service	Transit Provider	GTFS Data	Paper Schedule
1	WMATA Metrorail & Metrobus	Washington Metropolitan Area Transit Authority	x	
2	ART Bus	Arlington County	x	
3	City of Laurel Bus	The Regional Transportation Agency of Central Maryland (RTA)	x	
4	CUE Bus	Fairfax City	x	
5	DASH Bus	City of Alexandria	x	
6	Fairfax Connector	Fairfax County	x	
7	RTA Bus	Regional Transportation Agency for Central Maryland	x	
8	Lee Coaches Commuter Bus	Maryland Transit Administration (MTA)	x	
9	MTA	Maryland Transit Administration (MTA)	x	
10	Omni Link	PRTC (Prince William County)	x	
11	Omni Ride	PRTC (Prince William County)	x	
12	Ride-On Bus	Montgomery County	x	
13	St. Mary's Transit System	Maryland Transit Administration (MTA)	x	
14	The Bus	Prince George's County	x	
15	TransIT	Frederick County	x	
16	Amtrak	Amtrak	x	
17	Bethesda Circulator	City of Bethesda		x
18	Calvert County Bus	Calvert County	x	
19	Carroll Transit System	Carroll County	x	
20	City of Annapolis Bus	Annapolis Department of Transportation	x	
21	Corridor Cities Transitway	Montgomery County		x
22	DC Circulator	District Department of Transportation (DDOT)	x	
23	DC Streetcar	District Department of Transportation (DDOT)	x	
24	Fredericksburg Feeder Bus to VRE	City of Fredericksburg		x
25	Fredericksburg Regional Transit	City of Fredericksburg		x
26	LC Transit	Loudoun County		x
27	MARC	Maryland Transit Administration (MTA)		x
28	Metroway	Arlington County, City of Alexandria, WMATA		x
29	National Coach Commuter Bus	Martz Group		x
30	REX Bus	WMATA		x
31	TAGS	Transportation Association of Greater Springfield		x
32	US 1 BRT	Fairfax County		x
33	Tyson's Circulator	Fairfax County		x
34	Virginia Railway Express (VRE)	PRTC & NVTC	x	
35	Washington Flyer	Metropolitan Washington Airports Authority (MWA)		x
36	Vango	Charles County	x	
Total			25	11

Ref: "I:\ateam\docum\fy25\Visualize2050\_Network\_Report\Tables\transit\_service\_v2.4.6.xlsx"

Note: Although Metrorail schedule information is *available* from GTFS, TPB staff generally uses non-GTFS information for Metrorail, which is obtained directly from the transit agency. TPB staff also develops commuter rail schedule information (VRE and MARC, for both base year and future year) from non-GTFS sources.

TPB staff downloads GTFS data in text format directly from the primary transit providers or from the GTFS Data Exchange website (<http://transit.land/> or <http://transitfeeds.com/>) each fall. Upon finalization of the GTFS (General Transit Feed Specification) dataset, the GTFS Process module within COGTools performs a structured ingestion of stop\_times.txt, trips.txt, routes.txt, and calendar.txt files. It constructs a temporal profile of each transit route by computing average in-vehicle travel times and inter-trip headways across predefined time-of-day categories—typically AM peak, midday, PM peak, and Night. Time aggregations are weighted by trip frequency to reflect operational service levels. Concurrently, the module processes spatial characteristics by mapping ordered stop sequences (from stop\_times.txt) to geospatial representations, reconstructing route geometries using polyline interpolation or shape IDs where available. This information forms the geometric backbone for integrating transit services into the regional travel demand model.

### Algorithmic Flow: GTFS Process Module in COGTools

1. **Input Validation**
  - Load required GTFS files: agency.txt, routes.txt, trips.txt, stop\_times.txt, stops.txt, calendar.txt, and optionally shapes.txt
  - Check for file integrity and required fields
2. **Trip Filtering**
  - Apply filters based on service calendar and date range
  - Subset trips by time-of-day bins (e.g., AM Peak, Midday, PM Peak, night)
3. **Route Aggregation**
  - Group filtered trips by route\_id and time period
  - Compute average headways by counting trips and dividing service span
  - Compute average in-vehicle time by aggregating arrival\_time - departure\_time at each stop
4. **Spatial Reconstruction**
  - If shapes.txt is available, associate shape\_id to each trip and extract polyline
  - Else, interpolate polylines from ordered stop\_id sequences using spatial join with stops.txt
  - Generate GIS-ready route geometries
5. **Output Generation**
  - Export processed transit statistics (headways, run times)
  - Export route geometries as shapefiles or feature classes

After the GTFS data are added to the GDB, transit services from providers that do not provide GTFS scheduling data are manually coded into the UGDB using the schedule information published on those providers' websites. This completes the base-year transit network files upon which all forecast-year transit network files will be developed.